




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>A61B 17/22</b>		(11) International Publication Number: <b>WO 99/49793</b>
<b>A1</b>		(43) International Publication Date: 7 October 1999 (07.10.99)
<p>(21) International Application Number: PCT/US99/07115</p> <p>(22) International Filing Date: 31 March 1999 (31.03.99)</p> <p>(30) Priority Data: 60/080,196 31 March 1998 (31.03.98) US</p> <p>(71) Applicant: TRANSVASCULAR, INC. [US/US]; 1505-D Adams Drive, Menlo Park, CA 94025 (US).</p> <p>(72) Inventors: FLAHERTY, J., Christopher; 11 Pine Lane, Los Altos, CA 94022 (US). WHITT, Jason, B.; 2554 Franklin Street, San Francisco, CA 94133 (US). MACAULAY, Patrick, E.; 1426 Sprucewood Drive, San Jose, CA 95118 (US). THOLFSEN, David, R.; 263 Crescent Avenue, San Francisco, CA 94110 (US). GARIBOTTO, John, T.; 828-A Cowper Street, Palo Alto, CA 94301 (US). EVARD, Phillip, C.; 3192 Bryant Street, Palo Alto, CA 94306 (US).</p> <p>(74) Agent: BUYAN, Robert, D.; Stout, Uxa, Buyan &amp; Mullins, LLP, 4 Venture #300, Irvine, CA 92618 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published With international search report.</p>

(54) Title: CATHETERS, SYSTEMS AND METHODS FOR PERCUTANEOUS IN SITU ARTERIO-VEINOUS BYPASS

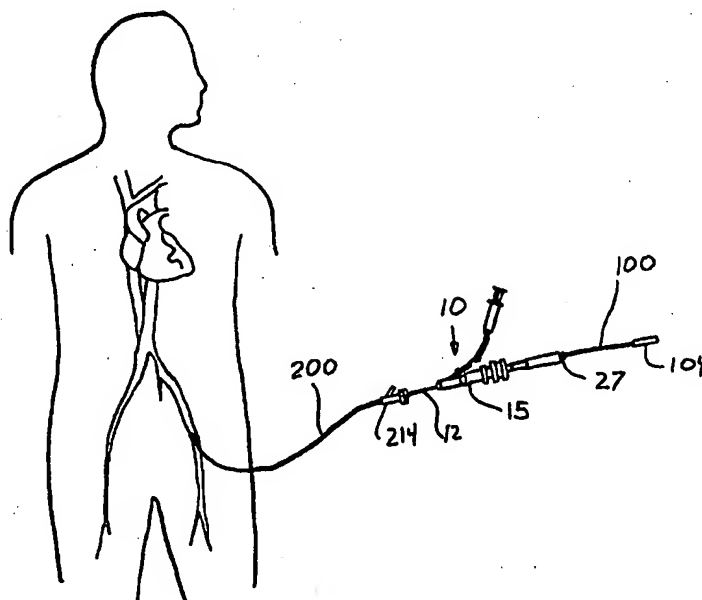

(57) Abstract

A system of catheter devices (10), and methods for forming channels or passageways between a luminal anatomical structure (e.g., a blood vessel), a target location (e.g., another blood vessel, an organ, a mass of tissue, etc.) for the purpose of rerouting blood flow or for delivering a substance or instrument, etc. to the target location.

BEST AVAILABLE COPY

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

0                                   **CATHETERS, SYSTEMS AND METHODS FOR**  
                                  **PERCUTANEOUS IN SITU ARTERIO-VEINOUS BYPASS**

**Related Application**

5                   This application claims priority to United States Provisional Patent  
Application Serial No. 60/080,196 entitled Methods and Apparatus for  
Percutaneous In Situ Coronary Artery Bypass, filed March 31, 1998.

**Field of the Invention**

10               The present invention relates generally to medical devices and  
methods, and more particularly to catheter devices and methods that are  
useable to form channels (e.g., penetration tracts) between vessels such as  
arteries and veins as well as between vessels and other anatomical  
structures, in furtherance of a therapeutic purpose such as bypassing an  
arterial blockage, delivering therapeutic agents, or performing other  
15               interventional procedures.

**Background of the Invention**

20               Applicant has invented several new interventional procedures  
wherein channels (e.g., bloodflow passageway(s)) are formed between  
blood vessels, and between blood vessels and other target structures, using  
transluminally advanceable catheters. These new procedures include novel  
percutaneous, transluminal techniques for bypassing obstructions in  
coronary or peripheral arteries through the use of the adjacent vein(s) as *in*  
*situ* bypass conduit(s), and other means of revascularizing oxygen starved  
25               tissues or delivering therapeutic substances to vessels, tissue and other  
organs. These procedures are fully described in United States Patent  
5,830,222 and in United States Patent Applications 08/730,496, 09/048,147  
and 09/048,147. Some of these procedures may be performed by a venous

0 approach, such as vein-to-artery wherein a tissue penetrating catheter is  
inserted into a vein and the desired arterio-venous passageway is initially  
formed by passing a tissue penetrating element (e.g., a flow of energy or an  
elongate penetration member) from a catheter, through the wall of the vein  
in which the catheter is positioned, and into the lumen of an adjacent artery.  
5 Alternatively, some of these procedures may be performed by an artery-to-  
vein approach wherein the catheter is inserted into an artery and the desired  
arterio-venous passageway is initially formed by passing a tissue  
penetrating element (e.g., a flow of energy or elongate penetration member  
) from the catheter, through the wall of the artery in which the catheter is  
10 positioned, and into the lumen of an adjacent vein. Both approaches have  
been previously described in United States Patent Application 08/730,327.  
In addition, it may be advantageous to direct a penetrating element directly  
into other anatomical structures such as the myocardium, pericardium,  
chamber of the heart or other organs as described in United States Patent  
15 Application 09/048,147.

Different considerations and limitations may apply, depending upon  
which of these approaches (the "vein-to-artery approach, the "artery-to-vein"  
approach, or vessel to other anatomical structure) is being used or, more  
generally, the size and contour of the blood vessel lumen in which the  
operative catheters are to be placed, and the distance and/or angle between  
20 the vessels or other target. This is due in part to the fact that, in the heart  
as well as in other areas of the body, adjacent arteries and veins may be of  
significantly different diameter and significantly different dilatory capability.  
In addition, depending on the procedure to be performed, for example, such  
25 as the desired angle of channel creation between blood vessels, one  
approach may be preferred over the other, to promote, among other things,  
blood flow channels that encourage non-turbulent blood flow. Also, the  
consequences associated with causing temporary complete obstruction of



0 a vein may be significantly less than the consequences of causing temporary complete obstruction of an artery. Thus, it is desirable to devise tissue penetrating catheters of the above-described type that are sized, configured and/or equipped differently for use in blood vessels of different sizes, shapes and in connection with different types of pathology.

5 Moreover, it is desirable for tissue penetrating catheters of the above-described type to be constructed and equipped for precise aiming and control of the tissue penetrating element as the tissue penetrating element passes from the catheter, through at least the wall of the blood vessel in which the catheter is located, and to the target location. Such aiming and control of the tissue penetrating element ensures that it will create the  
10 desired penetration tract at the intended location with minimal or no damage to surrounding tissues or other structures.

#### Summary of the Invention

15 The present invention provides methods and apparatus for performing the percutaneous *in situ* coronary arterio-venous bypass procedures generally described in United States Patent No. 5,830,222 and United States Patent Application Serial No. 08/730,327, and other procedures requiring the use of accurately placed catheter elements.

#### A. Devices and System:

20 In accordance with the invention, there is provided a system for forming an initial penetration tract from the lumen of a blood vessel in which the catheter is positioned to a target location (such as another blood vessel, organ or myocardial tissue). This system generally comprises:

25 a) a coronary sinus guide catheter which is insertable within the venous system of the body and into the coronary sinus of the heart;

b) a tissue penetrating catheter which is advanceable to a position within a coronary vein, such tissue-penetrating

0 catheter comprising i) a flexible catheter body, ii) a tissue  
penetrating element (e.g., a needle member, electrode or flow  
of energy) which is passable from the catheter body, through  
the wall of the coronary vein in which the catheter body is  
positioned and into the lumen of an adjacent coronary artery,  
5 or other targeted structure, iii) an imaging lumen through  
which an imaging catheter (e.g., an intravascular ultrasound  
imaging (IVUS) catheter) may be passed; and,

c) a separate imaging catheter (e.g., an intravascular  
ultrasound (IVUS) catheter) that is advanceable through the  
10 imaging lumen of the tissue-penetrating catheter.

In addition to components a-c above, this catheter  
system may include a subselective sheath and introducer.  
The subselective sheath comprises a flexible tubular sheath  
that has a proximal end, a distal end and a lumen extending  
15 therethrough. The introducer is insertable through the lumen  
of the sheath and has a tapered, non-traumatizing distal  
portion that protrudes out of and beyond the distal end of the  
sheath as well as a guidewire lumen extending longitudinally  
therethrough. The tapered, non-traumatic distal portion of the  
20 introducer serves to dilate the blood vessel lumens or  
openings through which the sheath is inserted, thereby  
facilitating advancement and positioning of the sheath at a  
desired location within the body. After the sheath has been  
advanced to its desired position within the body, the  
25 introducer is extracted and various channel modifying  
catheters, connector delivery catheters and/or blocker delivery  
catheters may be advanced through the subselective sheath.

0 The coronary sinus guide catheter may incorporate a hemostatic valve to prevent backflow or leakage of blood from the proximal end thereof. Also, the coronary sinus guide catheter may include an introducer that is initially insertable through the guide catheter lumen. This introducer has a tapered, non-traumatizing distal  
5 portion that protrudes out of and beyond the distal end of the guide catheter, and a guidewire lumen extending longitudinally therethrough. The tapered, non-traumatizing distal portion of the introducer served to dilate the blood vessel lumens through which the guide catheter is inserted, thereby facilitating advancement and  
10 positioning of the coronary sinus guide catheter within the coronary venous sinus.

The tissue-penetrating catheter may incorporate one or more of the following elements to facilitate precise aiming and control of the tissue-penetration element and the formation of the passageway at  
15 the desired location:

a) Orientation Structure: An orientation structure may be positioned or formed on the distal end of the tissue penetrating catheter. This orientation structure has i) a hollow cavity or space formed therewithin in alignment with the catheter's imaging lumen and ii) a marker member positioned  
20 in direct alignment with the opening in the catheter through which the tissue penetrating element emerges (or otherwise in some known spacial relationship to the path that will be followed by the tissue penetrating element as it passes from the tissue penetrating catheter). The separate imaging catheter may be advanced through the tissue penetrating catheter's imaging lumen and into the receiving space of the  
25 orientation structure. Thereafter, the imaging catheter is

0 useable to image the target location as well as the marker.  
The image of the marker provides a path indication that is  
indicative of the path that will be followed by the tissue  
penetrating element as it passes from the tissue penetrating  
catheter. The operator may then adjust the rotational  
5 orientation of the tissue penetrating catheter as necessary to  
cause the path indication to be aligned with or aimed at the  
target location, thereby indicating that when the tissue  
penetrating member is subsequently passed from the catheter  
body, it will advance into the target location and not to some  
10 other location. In this manner the imaging lumen, separate  
imaging catheter and orientation structure that are  
incorporated into the catheter system of this invention  
operate, in combination with each other, to facilitate precise  
rotational orientation of the tissue penetrating catheter and  
15 aiming of the tissue penetrating element *before the tissue  
penetrating element is advanced*, thereby ensuring that the  
tissue penetrating element will enter the desired target at the  
desired location. In particular, the orientation structure may  
comprise a plurality (e.g., three) of longitudinal struts, such  
20 longitudinal struts being disposed about a central space into  
which the IVUS catheter may be advanced. One of such  
longitudinal struts may be aligned or specifically positioned in  
relation to the path that will be followed by the tissue  
penetrating element as it passes from the catheter, thereby  
25 providing on the display of the image received from the IVUS  
catheter, an artifact of other indication delineating the path or  
direction in which the tissue penetrating element will pass.  
The tissue-penetrating catheter may then be selectively

0 rotated to aim the tissue penetrating element into the lumen  
of the artery or other target anatomical structure into which it  
is intended to pass.

5 b) Soft Distal Tip Member: The catheter may  
incorporate a soft distal tip member that is formed or mounted  
on the distal end of the tissue-penetrating catheter (e.g., on  
the distal aspect of the above-described orientation structure).  
Such soft tip member is preferably formed of material which is  
soft enough to avoid trauma to the walls of the blood vessels  
10 through which the tissue-penetrating catheter is passed. A  
lumen may extend longitudinally through the soft tip member,  
to allow the operator to selectively advance the IVUS catheter  
or other device beyond the distal end of the tissue-penetrating  
catheter when it is desired to image blood vessels or other  
structures located distal to the then-current position of the  
15 tissue-penetrating catheter or perform other diagnostic  
functions with said IVUS catheter or other device.

20 c) Tissue Penetrating Member Stabilizer: In  
embodiments wherein the tissue penetrating element is a  
needle or other elongate member that is advanceable laterally  
from the catheter body, the tissue penetrating catheter may  
~~incorporate a stabilizer to prevent or deter the tissue~~  
penetrating member from rotating or deviating from a  
predetermined acceptable penetration zone (APZ) (hereinafter  
sometimes referred to as the "stabilizer"). As used herein, the  
25 term stabilizer shall mean any structural or functional  
attributes of the catheter and/or tissue penetrating member  
that deter or prevent the tissue penetrating member from  
rotating or otherwise deviating from its intended path of

0 advancement within a predetermined acceptable penetration  
zone (APZ). Examples of such structural and/or functional  
attributes include but are not limited to; curved distal housing  
5 formed to mirror the curve or form of the tissue penetrating  
element, engagement projections or elements for frictional  
engagement between the tissue penetrating member and the  
catheter body, bushings or narrowed/reduced diameter  
regions of the tissue penetration member lumen that serve to  
10 constrain the tissue penetrating member preventing side-to-  
side play or movement thereof, permanent magnets or  
electromagnets that create a magnetic field that prevents or  
deters lateral or rotational movement of the tissue penetrating  
member, etc. More specifically, for example, this stabilizer  
may comprise one or more of the following:

15 i) a curved needle housing which mates  
(i.e. has the same direction of curvature) with a  
preformed curvature formed in the needle. This  
mating of the curvatures of the needle and  
needle housing serves to deter unwanted  
20 rotation and resultant lateral deviation (flopping  
or wagging) of the portion of the needle which  
extends out of the catheter body;

25 ii) frictionally engaged surfaces formed  
on the needle member and surrounding  
catheter body (e.g., the wall of the lumen in  
which the needle member is disposed) to lock  
or deter rotation of the needle member relative  
to the catheter body;

0                   iii) a steering mechanism for causing  
the distal portion of the catheter body to  
become curved in the direction in which the  
needle member is intended to advance so as to  
cause the preformed curve of the needle  
5                   member to mate with the induced curvature of  
the surrounding catheter body; and,

10                   iv) A laterally deployable needle guide  
member (e.g., a balloon or rigid annular  
structure) that is deployable from side of the  
tissue penetrating catheter adjacent to the  
outlet opening through which the tissue  
penetrating member passes to support and  
prevent unwanted lateral "play" or movement of  
the tissue penetrating member as it is advanced  
15                   from the catheter. This outwardly deployable  
needle guide member is initially disposed in a  
"stowed" position wherein it does not protrude  
(or only minimally protrudes) from the catheter  
body, and is subsequently deployable to an  
20                   "active" position wherein it protrudes laterally  
~~from the catheter body, in the area of the~~  
needle outlet aperture, to provide support  
and/or guidance for the advancing tissue  
penetrating element (e.g., needle member or  
25                   flow of energy) as the tissue penetrating  
element passes from the catheter body to the  
target location. This laterally deployable needle  
guide member may comprise a tubular cuff that

0 has a lumen. The lumen of such tubular cuff  
may form, in combination with the catheter  
lumen in which the tissue penetrating element  
is positioned, a curvature that mates with or  
conforms to the preformed or intended  
5 curvature of the path of the tissue penetrating  
element as it passes from the catheter to the  
target location. In cases where the tissue  
penetrating element is a curved needle, the  
curvature of the laterally deployable needle  
10 guide member and/or catheter lumen may mate  
with or be the same as the curvature of the  
needle member.

d) Needle Member Locking Apparatus: The tissue  
penetrating catheter may incorporate an apparatus that  
15 prevents or deters rotation of the tissue penetration member  
within the catheter body *prior* to its advancement out of the  
catheter. Such rotational locking of the tissue penetrating  
member while it is in its retracted position serves i) to  
maintain the desired rotational orientation of the needle  
20 member and ii) to enhance or couple the transfer of torque  
from the proximal end of the catheter to the distal end of the  
needle, without the addition of mass or cross-sectional  
dimension to the catheter body.

e) Catheter Body Construction: The tissue  
penetrating device may comprise an elongate catheter body  
25 12 with proximal, medial and distal segments of varying  
flexibility and torque strength as described more fully in United  
States Patent Application 08/837,294, incorporated herein by



0 reference. Said catheter body may incorporate reinforcement  
members such as a reinforcement braid member which  
imparts structural integrity/stability as well as enhancing the  
ability of the catheter body to transmit torque along its length.  
In addition, it may be important for said reinforcement member  
5 to maintain the longitudinal integrity of said catheter body, and  
to minimize any variability of the catheter components during  
operation in the body.

**B. Methods:**

Further in accordance with the invention, there are provided methods  
10 for using the above-summarized catheter system to bypass an obstruction  
in a coronary artery by forming one or more arterio-venous passageways.  
Examples of these methods are the Percutaneous In Situ Coronary Artery  
Bypass (PICAB), as well as the Percutaneous Coronary Venous  
Arterialization (PICVA). It is understood that the same orientation steps and  
15 procedures may be used to access various targets and anatomical  
structures from placement of a tissue penetrating catheter within a blood  
vessel and orienting said catheter in accordance with this invention.

***i. Percutaneous In Situ Coronary Artery Bypass (PICAB)***

The PICAB procedure generally comprises the following steps:

- 20 1. Introduce a coronary sinus guide catheter into the coronary sinus;  
2. Pass a tissue-penetrating catheter of the above-described type  
through the guide catheter and into the coronary vein;  
3. Position an IVUS catheter or ultrasound transducer within the  
orientation structure of the tissue-penetrating catheter, and utilize the IVUS  
25 catheter or ultrasound transducer to view the artery into which the arterio-  
venous passageway is to extend as well as the marker that denotes the  
path that will be followed by the tissue penetrating member as it is advanced  
from the catheter body;

0                   4. Rotate or move the tissue-penetrating catheter, as necessary, to cause the needle path indicator generated by the marker to become aligned with the lumen of the artery; and,

5                   5. Pass the tissue penetrating element from the catheter, through the wall of the vein in which the catheter is positioned, and into the lumen of the artery, thereby forming an initial arterio-venous passageway distal to the arterial obstruction. In some embodiments, the tissue penetrating element has a lumen extending longitudinally therethrough for passage of a guidewire from vessel to vessel.

10                  6. Move the catheter to a second location and repeat steps 4-6 to form an initial arterio-venous passageway proximal to the arterial obstruction.

                  7. Enlarge the proximal and distal arterio-venous passageways, if necessary, to permit the desired volume of blood flow through such passageways.

15                  8. Place connector(s), stent(s), liner(s) or other stenting or connecting devices within the proximal and/or distal passageways, if necessary, to maintain the patency of the passageways; and,

20                  9. Optionally, if necessary, place one or more blocker(s) within the coronary vein, or otherwise fully or partially block blood flow through the coronary vein, at location(s) that urge arterial blood to flow from the artery, — through the first passageway and into the vein, through a segment of the vein, through the second passageway, and back into the artery (downstream of the blockage), thereby restoring arterial blood flow to the ischemic myocardium.

25

0                    **ii.     Percutaneous Coronary Venous Arterialization (PICVA)**

Further, in accordance with the present invention, there is provided a method for Percutaneous In Situ Coronary Venous Arterialization (PICVA) procedure, using a catheter system of the foregoing character. This preferred PICVA procedure generally comprises the steps of:

- 5                    1.     Introduce a coronary sinus guide catheter into the coronary sinus;
2.     Pass a tissue-penetrating catheter of the above-described type through the guide catheter and into the coronary vein;
- 10                   3.     Position an IVUS catheter or ultrasound transducer within the orientation structure of the tissue-penetrating catheter, and utilize the IVUS catheter or ultrasound transducer to view the artery into which the arterio-venous passageway is to extend as well as the marker that denotes the path that will be followed by the tissue penetrating member as it is advanced
- 15                   4.     Rotate or move the tissue-penetrating catheter, as necessary, to cause the needle path indicator generated by the marker to become aligned with the lumen of the artery; and,
- 20                   5.     Pass the tissue penetrating element from the catheter, through the wall of the vein in which the catheter is positioned, and into the lumen of the artery, thereby forming an initial arterio-venous passageway distal to the arterial obstruction.
- . In some embodiments, the tissue penetrating element has a lumen extending longitudinally therethrough for passage of a guidewire from vessel to vessel.
- 25                   6.     Enlarge the initial arterio-venous passageways, if necessary, to permit the desired volume of blood flow through such passageway.

- 0                   7.     Place connector(s), stent(s), liner(s) or other stenting or  
                    connecting devices within the arterio-venous passageway, if  
                    necessary, to maintain the patency of the passageway; and,
- 5                   8.     Optionally, if necessary, place one or more blocker(s) within  
                    the coronary vein, or otherwise fully or partially block blood  
                    flow through the coronary vein, at location(s) that urge arterial  
                    blood to flow from the artery, through the arterio-venous  
                    passageway and into the vein, such that the arterial blood will  
                    flow through the vein in a direction opposite normal venous  
                    flow, thereby retro-perfusing the ischemic myocardium by  
10                  arterialization of the coronary vein.

Further aspects and advantages of the present invention will become  
apparent to those of skill in the art upon reading and understanding the  
detailed description of preferred embodiments set forth herebelow and the  
accompanying drawings.

#### 15                   Brief Description of the Drawings

Figure 1 is a schematic showing of a human being having a tissue-  
penetrating catheter system of the present invention percutaneously  
inserted via a femoral entry site.

20                  Figure 1a is a broken, side elevational view of a first embodiment of  
a tissue-penetrating catheter of the present invention.

Figure 1b is an enlarged view of the distal end of the catheter of  
Figure 1b.

Figure 1b' is a broken, side view of the catheter body construction of  
the catheter shaft of a tissue penetrating catheter of the present invention.

25                  Figure 1b'' is a detailed view of the braided construction of the  
catheter shaft of Figure 1b'.

Figure 1c is a cross sectional view through line 1c-1c of Figure 1a.

Figure 1d is a cross sectional view through line 1d-1d of Figure 1a.

0           Figure 1e is an enlarged, side elevational view of the needle housing/stabilizer assembly of the catheter of Figure 1a.

          Figure 1f is a cross sectional view through line 1f-1f of Figure 1e.

          Figure 1f' is a cross sectional view through line 1f'-1f' of Figure 1f.

5           Figure 2 is a representation of the intravascular ultrasound image that is obtained when the tissue-penetrating catheter of Figure 1a is positioned within a coronary vein and properly oriented/aimed such that deployment of its tissue penetrating member will form a penetration tract (i.e., a passageway) from the coronary vein to an adjacent coronary artery.

10          Figure 3 is a representation of the intravascular ultrasound image which is obtained when the tissue-penetrating catheter of Figure 1a is positioned within coronary vein and *improperly* oriented/aimed such that deployment of its tissue penetrating member will *not* form a passageway from the coronary vein to the adjacent coronary artery.

15          Figure 4 is a side elevational view of a subselective sheath and accompanying introducer that are useable in combination with the tissue-penetrating catheter of the present invention.

          Figure 4a is a side elevational view of a dilator that is insertable through and useable in conjunction with the subselective sheath of Figure 4.

20          Figure 5 is a partial longitudinal sectional view of the subselective sheath of Figure 4 having the dilator of Figure 4a operatively inserted therein.

          Figure 5a is an enlarged, cross sectional view through line 5a-5a of Figure 5.

25          Figure 6 is an enlarged, longitudinal sectional view of the distal portion of the subselective sheath of Figure 4.

          Figure 7 is a side elevational view of the tissue puncturing needle member of the tissue-penetrating catheter of Figure 1a.

0                    Figures 8a is an enlarged, side elevational view of the distal end of the needle member of Figure 7.

                  Figure 8b is an enlarged top view of the of the distal end of the needle member of Figure 7.

5                    Figures 9 & 9a show the hand piece/needle controller and distal end, respectively, of tissue-penetrating catheter of Figure 1 a with its tissue penetrating needle member in its retracted position.

                  Figures 10 & 10a show the handpiece/needle controller and distal end, respectively, of tissue-penetrating catheter of Figure 1 a with its tissue penetrating needle member in its fully advanced position.

10                   Figure 10 d is a side elevational view of an optional rotation-inhibiting key insert and corresponding keyed needle member which may be incorporated into the tissue-penetrating catheters of the present invention to prevent the tissue-penetrating needle member from rotating relative to the body of the catheter.

15                   Figure 10 d' is a cross sectional view through line 10 d'-10 d' of Figure 10 d.

                  Figure 10 d" is a cross sectional view through line 10 d"-10 d" of Figure 10 d.

20                   Figure 10 e is a side elevational view of an optional rotation-inhibiting oval insert and corresponding oval shaped needle member which may be incorporated into the tissue-penetrating catheters of the present invention to prevent the tissue-penetrating needle member from rotating relative to the body of the catheter.

25                   Figure 10 e' is a cross sectional view through line 10 e'-10 e' of Figure 10 e.

                  Figure 10 e" is a cross sectional view through line 10 e"-10 e" of Figure 10 e.

0. Figure 10 f is a partial longitudinal sectional view of a tissue-penetrating catheter device of the present invention incorporating an optional locking collar apparatus for preventing the tissue penetrating needle member from rotating relative to the catheter body when the needle member is in its retracted position.

5 Figure 10 f' is an enlarged view of region 10 f' of Figure 10 f.

Figure 10 g is a side elevational view of a tissue-penetrating catheter of the present invention having a laterally deployable needle stabilizer disposed in its "stowed" position.

10 Figure 10 g' is a side elevational view of a tissue-penetrating catheter of the present invention having a laterally deployable needle stabilizer disposed in its "active" position.

Figure 11 is a side elevational view of a coronary sinus guide catheter/introducer assembly of the present invention.

15 Figure 11a is a cross-sectional view through line 11a-11a of Figure 11.

Figure 11b is an enlarged, longitudinal sectional view of the proximal end/hemostatic valve of the coronary sinus guide catheter shown in Figure 11.

20 Figure 11c is broken, side elevational view of the introducer of the coronary sinus guide catheter/introducer assembly.

Figure 12 is an enlarged, cross-sectional view through a coronary artery and adjacent coronary vein, showing the typical difference in diameter of the artery and vein, and delineating a preferred Acceptable penetration zone (APZ) wherein the arterio-venous bloodflow passageways of the present invention are formed.

25 Figures 13a-13x are schematic, step-by-step showings of a preferred method for performing a percutaneous, *in situ* coronary arterio-venous

0 bypass (PICAB) procedure to bypass a blockage in the proximal Left Anterior Descending coronary artery, using a a vein-to-artery approach.

Figures 14 a-14m are schematic, step-by-step showings of a preferred method for performing a percutaneous coronary venous arterialization (PICVA) procedure to provide retrograde arterial bloodflow  
5 through a coronary vein.

### Detailed Description of Preferred Embodiments

The following detailed description, and the drawings to which it refers, are provided for the purpose of describing and illustrating certain preferred embodiments or examples of the invention only, and no attempt has been  
10 made to exhaustively describe all possible embodiments or examples of the invention. For example, the tissue penetrating catheter of this invention may be utilized is numerous locations in the body to reliably access organs, tissue or other structures to deliver therapeutic substances or procedures. Thus, the following detailed description and the accompanying drawings are  
15 not intended to limit, in any way, the scope of the claims recited in this patent application and any patent(s) issuing therefrom.

#### **A. The Catheter System:**

Referring generally to Figures 1-12, a presently preferred catheter system of the present invention generally comprises i) a tissue-penetrating catheter component 10 (Figures 1-3 and 7-10 a), ii) a subselective  
20 sheath/introducer component 100 (Figures 4-6) and iii) a coronary sinus guide catheter/introducer component 200 (Figures 11-11c). Each of these components is described in substantial detail herebelow. These components of the catheter system may be packaged together in a single  
25 kit, or may be provided in separate packages to permit the operator to mix and match component sizes in accordance with the particular anatomy of the patient, the size of the channels to be formed, the types of connectors and/or stents and/or blockers to be used, etc.



0           **I.    The Tissue-Penetrating Catheter Component of the Catheter System:**

5           Referring to Figures 1-3 and 7-10 there is shown a tissue-penetrating catheter device 10 which is insertable into the vasculature of a mammalian patient and useable to form passageways (e.g., puncture tracts) between  
10           the blood vessel in which the distal end of the catheter device 10 is situated and another blood vessel or other anatomical structure. This catheter device 10 generally comprises an elongate, flexible catheter body 12 having a proximal portion 12<sub>p</sub> of a first diameter D<sub>1</sub> and a distal portion 12<sub>d</sub> of a second diameter D<sub>2</sub> which is smaller than the first diameter D<sub>1</sub>. The catheter body 12 has two (2) lumens 14, 16 which extend longitudinally therethrough. The first lumen 14 is sized and configured to permit a standard commercially available IVUS catheter (e.g., those available from Endosonics of Rancho Cordova, CA; CVIS of Natick, MA or Hewlett-Packard of Andover, MA) to be inserted therethrough and slidably disposed therewith. The second lumen  
15           16 is sized and configured to house a tissue penetrating needle member 30 (see Figures 7, 9 and 10) which is alternately moveable between i) a retracted position (Figures 9-9a) wherein the distal end DE of the needle member 30 is contained within the catheter body 12, and ii) an extended position (Figures 10-10a) wherein the needle member 30 is advanced out of the catheter body 12 so as to penetrate through the walls of the blood  
20           vessels and through any intervening tissue located between the blood vessels.

**a. Orientation Structure:**

25           An orientation structure 36 and tip member 38 are formed integrally with or mounted on the distal end of the catheter body 12, as shown in Figures 1b, 9a and 10a. The orientation cage 36 comprises first 40, second 42 and third 44 strut members which extend longitudinally between the distal end of the catheter body 12 and the proximal end of the distal tip

0 member 38. The first strut member 40 is in direct longitudinal alignment with  
a needle outlet opening 46 formed in the side of the catheter body 12  
through which the tissue penetrating needle member 30 is advanced. The  
second and third strut members 42, 44 are located at equally spaced  
5 distances from the first strut member 40, while the distance between the  
second and third strut members 42, 44 is less than the distance between  
either of those second and third strut members 42, 44 and the first strut  
member 40. Such disparate (e.g., unequal) radial spacing of these strut  
members 40, 44 and 46 allows the operator to easily identify and distinguish  
10 the first strut member 40 from the other two strut members 42, 44 by way of  
the image received from an IVUS catheter positioned within the orientation  
structure 36. Thus, in this manner, the operator may selectively rotate the  
catheter body 12 until the first strut member 40 is directly aligned or  
juxtapositioned with the target blood vessel into which the needle member  
30 is to be advanced. An illustration of this technique is shown in Figures  
15 2 and 3. Figure 2 shows the IVUS image which is obtained when the tissue-  
penetrating catheter 10 is properly rotated such that the first strut member  
40 is aligned with the target artery A and the needle member 30 will  
advance into such target artery A. Figure 3 shows another situation where  
the tissue-penetrating catheter 10 is not properly rotated, the first strut  
20 member 40 is not aligned with the target artery A and the needle member  
30, if advanced, would not enter the target artery A.

It will be appreciated that the disparate distancing of the strut  
members 40, 42, 44 is only one possible way of rendering the first strut  
member 40 distinguishable from the other two strut members 42, 44.  
25 Alternatively, the size or configuration of the first strut member could be  
different so as to produce a distinguishable ultrasound image or the material  
or surface characteristics of the first strut member 40 could be made  
different from the other two strut members 42, 44 such that the first strut

0 member 40 would reflect more or less ultrasound than the other two strut  
members 42, 44 thus producing an ultrasound image which is  
distinguishable from the images produced by the other two strut members  
42, 44. It will also be appreciated that only one strut member may be  
5 required to provide a distinguishable element to aid catheter orientation, or  
alternatively two strut members may be positioned to delineate a zone within  
which the tissue penetrating member may be deployed, or other procedure  
conducted.

**b. Distal Tip Member:**

10 The distal tip member 38 is preferably of blunt tipped configuration  
and is formed of smooth soft material (e.g., PEBAX having a durometer  
hardness of 35D) so as to minimize trauma to the vasculature as the tissue-  
penetrating catheter device 10 is advanced or otherwise manipulated about.  
A hollow lumen 39 may extend longitudinally through the tip member 38, in  
15 alignment with the first lumen 14 of the catheter body 12, such that an IVUS  
catheter or other device such as a guidewire may be advanced from the first  
lumen 14, through the orientation structure 36, through the distal tip lumen  
38 and distally beyond the catheter device 10. This permits the operator to  
use the IVUS catheter to explore areas which are ahead of the distal end of  
the tissue-penetrating catheter without having to advance the tissue-  
20 penetrating catheter from its then-present position. It also permits the  
catheter device 10 to be introduced to the vasculature in the preferred "over  
the wire" manner.

**c. Tissue Penetrating Needle Member:**

25 The tissue penetrating element of the tissue penetrating catheter may  
comprise a sharp tipped needle 30 as shown in Figures 7, 8a and 8b. This  
needle 30 includes a proximal shaft 30p formed of stainless steel  
hypotubing and a resilient, curved distal portion 30d formed of a resilient  
material or, more preferably, a material such as NiTi alloy. Preferably a

0 lumen 31 extends longitudinally through the proximal shaft 30p and the curved distal portion 30d.

The particular radius of curvature of the curved distal portion 30d may be an important factor in determining the trajectory and path of the needle tip as it advances and the point at which the needle tip will stop when in its  
5 fully advanced position.

The distal tip of the needle member 30 is preferably sharpened so as to easily penetrate through the walls of the blood vessels and any intervening tissue located therebetween. One preferred needle tip configuration is the lancet type bevel 36 shown in Figures 8a and 8b. This  
10 lancet type bevel comprises a first radial surface 36a and a second radial surface 36b. Such lancet type tip 36 provides excellent tissue-penetrability and retains its sharpness after multiple retractions into/advancements from the catheter. In practice it may be important for the material surrounding the lumen of the needle, particularly at the distal tip of the needle, and particularly the heel of the needle lumen 36c, to be smooth and free of  
15 rough edges or burrs. This allows smooth passage of devices, such as guidewires, through the needle lumen.

In many applications, the controllability and aiming of the needle member 30 may be enhanced by constraining the needle member 30 such that it will remain in a preferred plane or acceptable penetration zone APZ  
20 —as shown in Figure 12, as it is advanced from the catheter. In embodiments where a curved needle member 30 is advanced out of a side aperture in the catheter ( e.g., the embodiment shown in Figure 10a), any rotation of the needle member 30 prior to, during or after advancement of the needle member 30 can cause the distal end of the curved needle member to deviate from or move out of the intended plane or acceptable penetration zone APZ. In this regard, the potential for such unwanted lateral movement  
25 of the distal end of the needle member 30 may be prevented or substantially

0 limited by providing a stabilizer to prevent or substantially limit the amount  
of rotation that the needle member 30 may undergo relative to the catheter  
body 12 or to otherwise prevent or deter the needle member from deviating  
from a predetermined acceptable acceptable penetration zone APZ (Figure  
12) as it is advanced from the catheter 10. In particular, by preventing or  
5 limiting the rotation of the needle member 30 within the needle lumen 16,  
the curved distal portion of the needle member will be deterred from  
deviating from its intended path of advancement as it is extended laterally  
from the catheter body 12 (see Figure 10a). Such prevention or limitation  
of the potential for rotation or lateral movement of the needle member 30  
10 may be accomplished in any suitable way. As described in detail  
herebelow, specific apparatus which may be incorporated into the catheter  
device 10 to prevent or deter rotation or lateral movement (i.e., "wagging"  
or "flopping") of the needle member 30 during or after its advancement from  
the catheter body 12, include:

15 a) a curved needle housing 60 which has a curve at its distal end  
which mates with the preformed curvature of the needle member 30 to deter  
rotation (see Figures 9-10f);

b) engaged surfaces 76, 77 formed on the needle member 30 and  
surrounding catheter body 12 to lock or deter rotation of the needle member  
20 30, examples of such engaged surfaces 76, 77 including but not necessarily  
being limited to i) a tongue in groove or key in key-way arrangement (see  
Figures 10d-10d") or ii) an oval to oval arrangement (see Figures 10e-10"),  
etc;

25 c) a steering mechanism for causing the distal portion of the  
catheter body 12 to curve in the lateral direction in which the needle  
member 30 is intended to advance so as to cause the preformed curve of  
the needle member 30 to mate with the induced curvature of the catheter  
body 12; and,

0 d) a needle guide member 500 which is laterally projectable from the catheter body 12 in the area of the needle outlet aperture 46 to support the needle member 30 and/or to form a lateral extension of the needle lumen 16 so as to create a lateral curve in the needle lumen which mates with the preformed curvature of the needle member 30 (see Figure 10 g).

5 i. Curved Needle Housing to Deter Rotation/Lateral Deviation of Extended Needle

10 An example of a preferred curved needle housing 60 mountable within the needle lumen 16 is specifically shown in Figures 1b-1f. Such needle housing 60 comprises a curved, rigid tube. A tubular liner 61 may be disposed within, and may extend from either end of, the curved needle housing 60. Such tubular liner 61 may be formed of a three-layer composite wherein the inner layer is a lubricious polymer material (e.g., polytetrafluoroethylene (PTFE)), the middle layer is a structural polymer material (e.g., polyimide) and the outer layer is an adhesive material which will bond to the inner surface of the curved needle housing 60 and to the inner surface of the needle lumen 16 at either end of the housing 60 (e.g., polyurethane adhesive). When the needle member 30 is in its retracted position (Figures 9 and 9a), and during advancement, the portion of the needle member which resides within the needle housing 60 will remain in a slightly curved state in conformance to the slightly curved configuration of the needle housing 60. This serves to deter the needle member 30 from rotating relative to the catheter body 12 and/or from undergoing uncontrolled movement (i.e., "flopping") out of the intended acceptable penetration zone APZ, during or after advancement from the catheter. This prevention or deterrence from rotation of the needle member 60 allows the operator to control the orientation of the lancet type or other bevel formed in the needle tip, and also enhances the operator's ability to predict the precise position of the needle tip by eliminating or minimizing the uncontrolled side-to-side

0 movement of the needle. To facilitate the desired positioning and orientation of the curved needle housing 60 during manufacture of the catheter 10, a locator member 62 may be attached to the needle housing 60 and incorporated into the catheter body 12 as shown in Figures 1b, 1e, 1f, 1f, 9a and 10a. This locator member 62 comprises a rigid disc 64 which is  
5 transversely positionable within the catheter body, having a first bore 66 and a second bore 68 extending longitudinally therethrough. A chamfered edge 69 is formed about the proximal end of the first bore 66, as shown in Figures 1f and 1f. During manufacture of the catheter body 12, a rod or mandrel is inserted through the first bore 66 of the locator and into the first lumen 14  
10 of the proximal catheter body portion 12<sub>p</sub> and the curved needle housing 60 having a tubular liner 61 extending therethrough and protruding for either end, are inserted through the second bore 68 and into the second lumen 16 of the proximal catheter body portion 12<sub>p</sub>. Thereafter, a distal plastic tube is advanced about the locator, a tubular polymer skin 73 is applied, and  
15 the composite is then heated to form the distal portion of the catheter body 12, as shown.

ii. Frictionally Engaged Surfaces of Needle Member and Catheter to Deter Rotation/Lateral Deviation of Extended Needle:

20 As an alternative to, or in addition to, the use of the curved needle housing 60 as a means for preventing rotation of the needle member 30 and for providing more accurate and stable deployment of the needle member 30, the needle member 30 and at least a portion of the second lumen 14 may incorporate engaged surfaces which are frictionally engaged to one another so as to prevent or deter rotation of the needle member 30 within  
25 the needle lumen 16. Examples of such engaged surfaces 76, 77 include a key/key-way design shown in Figures 10d-10d" or an oval/oval design such as that depicted in Figures 10e-10e".

0           With specific reference to the showings of Figures 10d-10d", the  
key/keyway method of preventing independent rotation of the needle  
member 30 may be effected by use of a key-way element 76 in combination  
with a keyed needle 30<sub>key</sub>. The key-way element 76 comprises a tubular  
member which has a key-way shaped lumen 77 with a key portion 79  
5       extending longitudinally therethrough. The keyed needle 30<sub>key</sub> comprises a  
hollow needle of the type described hereabove and shown in Figures 7-8b  
having a longitudinally extending rail or key member 33 formed upon a  
segment thereof. The key member 33 may be formed as a portion of the  
needle wall or may alternatively comprise a separate member, such as a  
10       section of hypotube, affixed to the side of the needle wall. The keyed  
needle 30<sub>key</sub> is sized and configured to be advanced and retracted through  
the lumen 77 of the key-way housing, with the key member 31 being  
disposed within the key portion 79 of the lumen 77. In this manner the  
keyed needle member 30<sub>key</sub> is longitudinally advanceable and retractable,  
15       but can not be rotated within the lumen 77 due to the engagement of the  
needle key member 31 with the key portion 79 of the lumen 77. The key-  
way element 76 is provided with a stabilizer 78 which is substantially the  
same as the needle housing stabilizer 62 described above and shown in  
Figures 1e-1f, and the key-way element 76/stabilizer 78 assembly may be  
20       installed and mounted within the catheter body at the time of manufacture  
~~in the same manner as described hereabove with respect to the needle~~  
housing 60/stabilizer 62 assembly shown in Figures 1e-1f. This key-way  
element 76/stabilizer 78 assembly is typically installed and mounted in the  
catheter body 12 proximal to the location of the needle housing 60/locator  
25       62 assembly shown in Figures 1e-1f but near enough to the distal end of  
the catheter device 10 to prevent the portion of the needle adjacent its distal  
end from undergoing untoward rotation within the catheter body 12 during  
the catheter insertion procedure.



0 With specific reference to the oval/oval arrangement shown in  
Figures 10e-10e", the device 10 may incorporate an oval shaped needle  
housing 76<sub>alt</sub> in combination with an oval shaped needle 30<sub>ov</sub>. The oval  
shaped needle housing 76<sub>alt</sub> comprises a tubular member positioned within  
the needle lumen 16 and having an oval shaped lumen 77<sub>alt</sub> extending  
5 longitudinally therethrough. The oval shaped needle 30<sub>ov</sub> comprises a  
hollow needle of the type described hereabove and shown in Figures 7-8b  
having an oval, ovoid or other non-round cross-sectional configuration. The  
oval shaped needle 30<sub>ov</sub> is sized and configured to be advanced and  
retracted through the lumen 77<sub>alt</sub> of the oval shaped needle housing 76<sub>alt</sub>,  
10 but can not be rotated within the lumen 77<sub>alt</sub> due to the engagement of the  
oval shaped needle member 30<sub>ov</sub> with the oval shaped wall of the housing  
lumen 77<sub>alt</sub>. The oval shaped needle housing 76<sub>alt</sub> is provided with a locator  
78 which is substantially the same as the needle housing locator 62  
described above and shown in Figures 1e-1f, and the oval shaped needle  
15 housing 76<sub>alt</sub>/locator 78 assembly may be installed and mounted within the  
catheter body 12 at the time of manufacture, in the same manner as  
described hereabove with respect to the needle housing 60/locator 62  
assembly shown in Figures 1e-1f. This oval shaped needle housing  
76<sub>alt</sub>/locator 78 assembly will typically be installed and mounted in the  
20 catheter body 12 proximal to the location of the needle housing 60/locator  
62-assembly-shown-in-Figures-1e-1f, but near enough to the distal end of  
the catheter device 10 to prevent the portion of the needle 30<sub>ov</sub> adjacent its  
distal end from undergoing untoward rotation within the catheter body 12  
during the catheter insertion procedure.

25 iii. Laterally Deployable Needle Guide to Deter Rotation/Lateral  
Deviation of Extended Needle:

Figures 10g and 10g' show an example of a needle guide member  
500 which may be caused to project or extend laterally from the catheter

0 body 12 in the area of the needle outlet aperture 46 to stabilize and guide  
the advancing needle member, thereby deterring lateral or side-to-side  
movement of the needle member 30 and further constraining the path which  
will be followed by the advancing needle. The deployment of such needle  
5 guide member 500 may also give rise to a lateral extension of the needle  
lumen 16 which mates with the preformed curve of the needle member 30  
to prevent rotation of the needle member 30 in essentially the same manner  
as the curved needle housing 60 described above.

10 The particular laterally deployable guide member 500 shown in  
Figures 10g and 10g' is an inflatable annular member that is connected to  
an inflation fluid lumen 502 that extends through the catheter body 12 to  
permit inflation fluid to be infused and withdrawn from the inflatable guide  
member 500. When deflated (Figure 10g) the guide member 500 will nest  
15 within a depression or cut out region in the catheter's outer wall thereby  
assuming a configuration that is substantially flush with the outer surface  
504 of the catheter body 12. When inflated (Figure 10g') the guide member  
500 will form an annular support collar around the tissue penetrating  
member 30 as it advances laterally from the catheter body. The surface(s)  
of the inflatable guide member 500 that may be brushed against or  
20 contacted by the tip of the tissue penetrating member as it advances out of  
the outlet opening 46 may be armored or coated with a metal foil or other  
material that will resist puncture by the tip of the tissue penetrating member  
30.

iv. Steerable Catheter Body to Deter Rotation/Lateral Deviation of  
the Extended Needle Member:

25 The catheter body 12 may be provided with a mechanism for inducing  
a curve or bend in the region of the catheter body 12 proximal to the needle  
outlet aperture 46 to cause the portion of the needle lumen 16 proximal to  
the outlet aperture 46 to assume a curvature which mates with the curved

0 shape to which the needle member 30 is biased, thereby deterring rotation  
of the needle member 30 within the catheter in the same manner described  
above with respect to the curved needle housing 60. The mechanism by  
which the catheter body 16 may be induced to curve may be any suitable  
5 catheter steering apparatus known in the art, such as an internal pull wire  
or spine member formed on shape memory alloy which is alternately  
transitionable between a straight configuration and a curved configuration.

v. Rotational Locking of Needle Member When Retracted to Maintain  
Correct Orientation and Enhance Torque Transfer:

10 It is desirable for the proximal shaft of the tissue-penetrating catheter  
10 to be endowed with enough structural integrity to transmit torque to the  
distal end of the catheter, as necessary for precise rotational orientation and  
aiming of the catheter device 10 before advancement of the needle member  
30 therefrom. Also, in many applications, it is desirable for the needle  
15 member 30 to be maintained in a predetermined rotational orientation within  
the catheter body 12 prior to advancement of the needle member 30 from  
the catheter 10 (i.e., while the needle member 30 is still in its retracted  
state). In many applications, it is also desirable to minimize the diameter of  
the catheter body 12 to allow it to pass through small blood vessel lumens.  
Each of these three (3) objectives may be achieved by rotational locking of  
20 the needle member 30 within the catheter body prior to its advancement  
from the catheter, as such rotational locking i) prevents unwanted needle  
rotation, ii) enhances the efficiency of torque transfer to the distal end of the  
catheter body 12 and thereby the needle, and iii) does not add any mass or  
additional diameter to the catheter body 12.

25 Figures 10f-10f' show a needle locking collar assembly 520, which  
comprises an enlarged region 522 formed within the needle lumen 16,  
wherein a first locking collar member 524 and second locking collar member  
526 are located. The first locking collar member 524 is stationarily affixed

0 to the catheter body 12 and has cavities or grooves 528 formed in the distal  
surface thereof and a central aperture through which the needle member  
30<sub>col</sub> may be advanced and retracted. The second locking collar member  
526 is affixed to the needle member 30<sub>col</sub> and has projections 530 extending  
5 from the proximal surface thereof. The projections 530 are sized, located  
and configured to be received within the grooves 528 of the first collar  
member 524 when the needle member 30<sub>col</sub> is in its retracted position,  
thereby frictionally locking the needle member 30<sub>col</sub> to prevent its rotation  
relative to the catheter body 12. However, when the needle member 30<sub>col</sub>  
10 is in its extended position, the projections 530 will not be inserted within the  
grooves 528, and the collar assembly 520 will not prevent the needle  
member 30<sub>col</sub> from rotating within the catheter body 12. It will be  
appreciated that these stabilizing devices may be employed at various  
points along the length of the catheter body, including the proximal, medial,  
distal or needle housing portion.

15 **d. Handpiece/Needle Controller:**

A handpiece/needle controller 15 is mounted on the proximal end of  
the Catheter body 12, and is useable to control the rotational orientation of  
the catheter body 12 and the advancement/retraction of the needle member  
30.

20 Also this handpiece/needle controller 15 has a proximal port 27  
formed on its proximal end through which a small guidewire (e.g., a 0.0010-  
0.016 inch diameter wire) may be advanced through the lumen 31 of the  
needle member 30, a first side port 21 through which a large guidewire (e.g.,  
a 0.030-0.040 inch diameter wire) may be advanced through the first lumen  
25 14 when that first lumen 14 is not occupied by an IVUS catheter, and a  
second side port 23 through which a flush solution may be infused into the  
catheter's second lumen 16 outside of the needle member 30 disposed  
therein.

**e. Catheter Body:**

The catheter body 12 includes a relatively stiff proximal section 12a, a medial section 12b, and a distal section 12c shown in Figs 1A and 1B. The catheter body exhibits varying flexibility and torque strength along its length, and may incorporate reinforcement members such as a reinforcement braid member which imparts structural integrity as well as enhancing the ability of the catheter body to transmit torque. A hand piece 15 is attached to the proximal end of the proximal section 12a, as shown. In the preferred embodiment the hand piece 15 and proximal section 12a are approximately 115cm in length. The medial section extends approximately 25cm terminating approximately 2cm from the distal section 12c. The proximal and medial sections of the catheter contain a braided component 50 as shown in Figs. 1B' and 1B'', encased in a polymer material (e.g. Pebax, nylon, polyurethane, polyester or PVC) extruded to form the inner lumen 50b and out jacket 50a of catheter body 12.

It has been determined that material expansion and changes in the physical properties of certain materials may occur after the catheter 10 is inserted into the patient's body and warmed from room temperature to body temperature. This material expansion and changes in the physical properties of certain materials can result in variation in the tolerances and sizing of the catheter 10 (e.g. elongation or shrinking) and can thus give rise to an unwanted modification of the position of the tissue penetrating member 30. This could, in at least some cases, interfere with the precise aiming and advancement of the tissue penetrating member as desired. Fig. 1B'' illustrates the braid angle A and pick count PC of the catheter braid 50. The "pick count" PC of the braid is, as is well known in the art, a function of the braid angle A (i.e., the greater the braid angle the more picks per inch).

0                   Also, the torque transmission and stiffness of the braided section 50  
is a function of the braid angle (i.e., a braid angle of 90 degrees provides  
maximum torque transfer and a braid angle of 0 degrees provides minimum  
torque transfer). Catheters used in the present invention that have exhibited  
this phenomenon have braid angles A that result in a pick count of 50 – 70  
5                   picks per inch. However, applicant has determined that by decreasing the  
braid angle A of the braid 50 within the proximal and medial sections of the  
catheter 10 to result in a pick count of 20 – 30 picks per inch, it is possible  
to minimize or eliminate the unwanted longitudinal expansion of the catheter  
10                  10 and/or its components, while retaining sufficient torque transmission and  
acceptable stiffness to accomplish the procedures for which the catheter 10  
is intended (examples of such procedures are illustrated in Figures 13a-14m  
herebelow). This variation in braid angle or picks per inch may vary  
depending on the material of construction of the catheter and/or the braid  
fiber, and the diameter of the catheter body.

15                   **II. The Coronary Sinus Guide Component of the Catheter System:**

Figures 11-11c show a preferred coronary sinus guide  
catheter/introducer assembly 200, which comprises a) a flexible coronary  
sinus guide catheter 203 that has a curved distal portion 204, a proximal  
20                  assembly 214 mounted on the proximal end of the flexible catheter body  
203, and a hollow lumen 202 extending longitudinally therethrough and b)  
an introducer 213 that has a tapered, soft distal portion 213d that protrudes  
out of and beyond the distal end DE of the guide catheter 203 and a  
guidewire lumen 215 that extends longitudinally through the introducer 213  
25                  to permit the guide catheter/introducer assembly to be advanced over a  
guidewire GW as described more fully herebelow in connection with a  
preferred method of using the catheter system 10.

0 A reinforcement braid 212, such as a wire braid, is formed within a  
portion of the catheter body 203 but terminates approximately 2 to 5  
centimeters from the distal end DE. In this manner, the reinforcement braid  
212 will prevent kinking and improve torque strength of the proximal portion  
of the catheter body 203, and the curved portion thereof, up to a location at  
5 about 2 to 5 centimeters from its distal end DE.

The proximal assembly comprises a rigid body 248 through which the  
lumen 202 extends, and upon which a proximal port 250 is formed to permit  
the guide introducer 213, subselective sheath 100 (Figures 4-6), tissue-  
penetrating catheter device 10 (Figures 1 and 9-10), or other catheters,  
10 guidewires and/or devices (e.g., blocker delivery catheter, channel  
connector delivery catheter, channel enlarging device, etc...) to be inserted  
through the lumen 202 of the coronary sinus guide catheter 200. A  
hemostatic valve 244, such as a cross-cut resilient membrane, a slit-cut  
resilient membrane, or a flapper valve) is positioned transversely within the  
15 lumen 202 of the proximal assembly 214 to prevent blood from backflowing  
out of the proximal port 250 when no catheter or other device is inserted  
therethrough and to prevent or minimize the amount of blood which may  
leak out of the proximal port 250 when a catheter or other device is inserted  
therethrough. A side port 246 is formed on the proximal assembly 214 to  
20 permit preparation fluid to be infused or injected into or through the lumen  
202. A plurality of side apertures 210 are formed in the wall of the catheter  
body 203 near its distal end to allow pressure relief in the event that a  
radiographic contrast medium or other fluid is injected.

### **III. The Subselective Sheath Component of the Catheter System**

25 As shown in Figures 4-6, a preferred subselective sheath 100 of the  
present invention comprises a flexible sheath body 102 having a proximal  
hub 104 and a lumen 106 extending longitudinally therethrough. A  
reinforcement braid 108 is formed within the catheter body 102 to prevent

0 kinking and improve torque strength. Such reinforcement braid terminates  
distally at 0.1-1.0 centimeter from the distal end of the catheter body 102.  
A gradual taper 110 is formed about the distal end of the sheath body's  
outer surface to such that the sheath 100 will taper to a flush transition with  
the distally protruding portion 111d of its introducer 111. The lumen 202 has  
5 an inner diameter D1 which is substantially the same as the outer diameter  
of the introducer 111 that is initially inserted through the lumen 106. The  
introducer 111 has a guidewire lumen 109 that extends longitudinally  
therethrough to permit the subselective sheath/introducer assembly to be  
advanced over a previously inserted guidewire GW (e.g., a 0.035 inch  
10 guidewire). The outer diameter of the sheath 100 is sized to be advanced  
and retracted through the lumen 202 of the coronary sinus guide catheter  
200 (Figures 11-11b). The preferred method of using this subselective  
sheath 100 and introducer 111 are described in detail herebelow with  
respect to the methods of the present invention.

15 ***B. Preferred Methods for Using the Catheter System:***

The present invention also includes methods for using this catheter  
system described hereabove (or any other catheter system or devices that  
may be suitable to carry out the desired purpose), in conjunction with other  
apparatus such as guidewires, channel enlarging catheters/devices, channel  
20 connecting catheters/devices and vessel blocking catheters/devices to  
perform percutaneous, *in-situ* coronary arterio-venous bypass procedures  
by way of a vein-to-artery approach, such method being fully described  
herebelow and shown in step-by-step fashion in Figures 13a-13x and 14a-  
14m.

25 The catheter system described hereabove and shown in Figures 1-  
11b is useable in conjunction with a fluoroscope, an IVUS imaging catheter,  
a coronary sinus access catheter (e.g., a standard angiographic catheter),  
a channel-enlarging catheter device, lumen-blocking device(s), a 0.035 inch



0 diameter guidewire, and one or more 0.014 inch diameter guidewire(s) to  
perform various revascularization procedures including, as described in  
detail herebelow, a Percutaneous In Situ Coronary Artery Bypass (PICAB)  
procedure as well as a Percutaneous In Situ Coronary Venous  
5 Arterialization (PICVA) procedure. It will be appreciated that, in addition to  
the particular PICAB and PICVA examples described in detail herebelow,  
the catheter system of the present invention may also be useable to perform  
various other procedures such as directed drug delivery procedures of the  
type described in co-pending United States Patent Application SN  
09/048,147 and other revascularization procedures.

10  
***I. A Preferred Method for Performing the PICAB Procedure:***

Figures 13a-13x show, in step-by-step fashion, an example of a  
PICAB procedure wherein the catheter system 10 of the present invention  
is used for the purpose of bypassing a blockage located in the proximal  
15 portion of the Anterior Descending Coronary Artery (LAD) of a human  
patient. In this PICAB procedure, a coronary sinus access catheter (e.g.,  
a standard angiographic catheter such as the modified Simmons-type  
angiographic catheter available from Cook Cardiology, Bloomington,  
Indiana) is initially inserted through a femoral vein or external jugular vein  
20 approach, using standard percutaneous catheter insertion technique. After  
such initial percutaneous catheter insertion has been accomplished, the  
PICAB procedure proceeds as follows:

***First Step: Coronary Sinus Access / Introduction of First Guidewire:***

25 As shown in Figure 13a, an arterial blockage AB to be bypassed is  
located in the left anterior descending coronary artery (LAD). The coronary  
sinus access catheter 500 is advanced into the coronary sinus CS, as  
shown in Figure 13b, to assist in the placement of a 0.035 inch diameter  
guidewire GW<sub>1</sub> into the great cardiac vein (GCV) and anterior interventricular

0 vein (AIV). This guidewire GW<sub>1</sub> can be pre-loaded in the lumen of the coronary sinus access catheter 500 or can be advanced through the lumen of the coronary sinus access catheter 500 after it has been positioned in the coronary sinus, as a separate step. Thereafter, the coronary sinus access catheter 500 is removed, leaving the 0.035 inch guidewire GW<sub>1</sub> in place.

5 *Second Step: Introduction of Coronary Sinus Guide Catheter / AIV*

*Access:*

As shown in Figure 13c-13d, the coronary sinus guide catheter 200 with introducer sheath 100 disposed within or through its lumen 202, is advanced over the 0.035 inch guidewire GW<sub>1</sub> until the tip of the coronary sinus guide catheter 200 is past the "mouth" of the coronary sinus. The introducer sheath 100 is then removed, leaving the coronary sinus guide catheter 200 in place, in the manner shown in Figure 13d.

*Third Step: Introduction & Aiming of Tissue-penetrating Catheter:*

As shown in Figure 13e, the tissue-penetrating catheter 10 is then inserted over the pre-positioned 0.035 inch guidewire GW<sub>1</sub>, through the lumen 202 of the coronary sinus guide catheter 200, and is advanced using fluoroscopy to a position distal to the arterial blockage AB being bypassed. The 0.035 inch guidewire GW<sub>1</sub> is then extracted and removed from the first lumen 14 of the tissue-penetrating catheter 10 and an IVUS imaging catheter (not shown) is then advanced through that first lumen 14 until the

IVUS transducer resides within the hollow interior space of the orientation structure 36. The IVUS catheter is then used to receive a 360 degree ultrasound image from a vantage point within the interior space of the orientation structure 36. Such image enables the operator to see both the resident vessel (the AIV) and the target vessel (the LAD), as well as the reflections or artifacts from the three strut members 40, 42 & 44 of the orientation structure 36. Because of the disparate distancing between the strut members 40, 42 & 44, the reflections or artifacts produced by the strut

0 members will form a generally "Y" shaped image as illustrated in Figures 2  
and 3 of this patent application. The reflection  $40_{Ref}$  produced by the first  
strut member 40 is clearly distinguishable from the reflections  $42_{Ref}$ ,  $44_{Ref}$   
5 produced by the second and third strut members 42, 43, and provides an  
indication of the particular direction in which the needle member 30 will  
travel when advanced from the needle outlet opening 46 in the side of the  
catheter body 12. Thus, if the first strut member reflection  $40_{Ref}$  observed  
10 on the IVUS image *does not* extend directly toward or into the lumen of the  
LAD (as illustrated in Figure 3), the operator will rotate the tissue-penetrating  
catheter 10 until such first strut member reflection  $40_{Ref}$  observed on the  
IVUS image *does* extend directly toward or into the lumen of the LAD (as  
illustrated in Figure 2). This will ensure that the needle member 30 is  
properly aimed to enter the LAD when advanced.

*Fourth Step: Formation of Initial Arterio-Venous Penetration Tract  
Distal to Blockage:*

15 As shown in Figure 13f-13h, the tissue penetrating needle member  
30 is then advanced in the distal direction to its extended position such that  
it punctures through the wall of the resident vessel (the AIV), through any  
tissue which may exist between the resident vessel (the AIV) and the target  
vessel (the LAD) and into the lumen of the target vessel (the LAD) at a  
20 location downstream of the arterial blockage AB. This maneuver results in  
the formation of an initial arterio-venous penetration tract PT. With the  
needle member 30 in its extended position and its distal tip in the lumen of  
the target vessel (the LAD), a 0.014 inch diameter guidewire  $GW_2$  is inserted  
through the proximal port 27 of the tissue-penetrating catheter  
25 handpiece/needle controller 15 and advanced through the lumen 31 of the  
needle member 30 into the target vessel (the LAD), as shown in Figure 14h.  
After the 0.014 inch diameter guidewire  $GW_2$  has been introduced into the  
target vessel (the LAD) the needle member 30 is withdrawn to its retracted

0 position, leaving the 0.014 inch diameter guidewire  $GW_2$  extending through the initially formed interstitial passageway into the target vessel (the LAD) as shown in Figure 14h. After the needle member 30 is withdrawn to its retracted position, the tissue-penetrating catheter 10 is withdrawn and removed, leaving the 0.014 inch guidewire in place (i.e., extending through  
5 the newly formed arterio-venous penetration tract PT).

*Fifth Step: Deployment of Blocker into Vein Lumen Distal to Blockage:*

As shown in Figures 13 i-k, the subselective sheath 100 with its introducer 111 inserted therethrough is advanced through the coronary  
10 sinus guide 200 over the large guide wire  $GW_1$ . Thereafter, the introducer 111 and guidewire  $GW_1$  are removed and one or more embolic blocker members BM are introduced into the proximal end of the subselective sheath, pushed through the lumen of the subselective sheath 100 using a  
15 pusher rod (not shown) and expelled into the lumen of the coronary vein (the AIV) where such embolic blocker(s) expand and engage the wall of the vein to cause substantial occlusion and blockage of bloodflow through the vein at that location. Examples of such blocker members BM and their  
methods of implantation are described in United States Patent Application  
Serial No. 09/117,156. The 0.035 inch diameter guidewire  $GW_1$  is then  
20 removed, and an embolic blocker member BM is inserted into the proximal end of the subselective sheath. A push rod is then advanced through the lumen of the subselective sheath to push the embolic blocker member BM out of the distal end of the subselective sheath and into its desired position  
within the lumen of the coronary vein (the AIV). It is to be noted that this  
25 blocker deployment step may be performed at this point in the procedure, or alternatively may be delayed until a later time in the procedure. After the distal blocker member BM has been implanted at its desired location, the 0.035 inch diameter guidewire  $GW_1$  is reinserted through the subselective

0 sheath 100 and the subselective sheath 100 is then withdrawn and removed as shown in Figure 13k.

Sixth Step: Formation of Initial Arterio-Venous Penetration Tract Proximal to Blockage:

5 As shown in Figures 13l-13n, the tissue-penetrating catheter 10 is then once again advanced over the 0.035 inch diameter guidewire GW<sub>1</sub>, under fluoroscopy, to a position that is proximal to the previously-formed distal penetration tract PT. The above-described fourth step is then repeated to form another initial arterio-venous penetration tract PT proximal to the blockage, and to pass a second 0.014 inch guidewire GW<sub>2</sub> through that second arterio-venous penetration tract PT. The tissue-penetrating catheter 10 is then withdrawn and removed, leaving both 0.014 inch guidewires GW<sub>1</sub> and GW<sub>2</sub> in place, in the manner shown in Figure 13n.

Seventh Step: Enlargement of Distal Penetration Tract to Form Arterio-Venous Bloodflow Passageway:

15 As shown in Figure 13o, the subselective sheath 100 and its introducer 111 are advanced through the guide catheter 203, over the second guidewire GW<sub>2</sub> to a location where the distal end of the subselective sheath 100 is within the AIV immediately adjacent the distal penetration tract PT. Thereafter, the introducer 111 is withdrawn and a channel enlarging catheter device CEC, of the type described in United States Patent  
20 Application 09/056,589, is advanced over the 0.014 inch guidewire GW<sub>2</sub>, which extends through the distal arterio-venous penetration tract PT, thereby the dilating or enlarging that tract to form an arterio-venous bloodflow passageway PW. This step of the procedure provides control  
25 over the diameter or size of the arterio-venous bloodflow passageways PW and helps to ensure that the passageways PW will remain patent and functional following completion of the procedure. After such enlargement of the penetration tract to form the intended passageway PW, the channel

0 enlarging catheter device CEC is withdrawn and removed along with the subselective sheath 100, leaving both 0.014 inch guidewires GW<sub>1</sub> and GW<sub>3</sub> in place, in the manner shown in Figure 13p.

*Eighth Step: Placement of Connector Device in Distal Arterio-Venous Bloodflow Passageway:*

5 As an optional step, a connection device may be deployed in the passageway PW. As shown in Figures 13q-13s, the subselective sheath 100 and its introducer 111 are then advanced over the distal channel guidewire GW<sub>2</sub> to a position where the distal end of the subselective sheath 100 is in the AIV immediately adjacent the distal bloodflow passageway PW. Thereafter, the introducer 111 is removed and a connector device  
10 delivery catheter CDC, of the type described in United States Patent Application Serial No. 08/970,694, is advanced over through the subselective sheath 100 and over the 0.014 inch guidewire GW<sub>2</sub> which extends through the distal arterio-venous passageway PW, to implant a  
15 connector device CD within that passageway PW. The connector delivery catheter device CDC is then removed, along with the subselective sheath 100 and the distal 0.014 inch guidewire GW<sub>2</sub> that had extended through the distal arterio-venous passageway PW, leaving the distal connector device CD in place within the distal arterio-venous passageway PW in the manner  
20 shown in Figure 13s.

*Ninth Step: Enlargement of Proximal Penetration Tract to form the Proximal Arterio-Venous Bloodflow Passageway:*

25 As shown in Figures 13t-13u, the subselective sheath 100 and its introducer 111 are then advanced over the distal channel guidewire GW<sub>2</sub> to a position where the distal end of the subselective sheath 100 is in the AIV immediately adjacent the distal bloodflow passageway PW. Thereafter, the introducer 111 is removed and a and a channel enlarging catheter device CEC, of the type described in United States Patent

0 Application 09/056,589, is advanced over the 0.014 inch guidewire GW<sub>3</sub> that extends through the proximal arterio-venous penetration tract PT, thereby the dilating or enlarging that tract to form a proximal arterio-venous bloodflow passageway PW. This step of the procedure provides control over the diameter or size of the arterio-venous bloodflow passageways PW and helps to ensure that the passageways PW will remain patent and functional following completion of the procedure. After such enlargement of the proximal penetration tract to form the intended passageway PW, the channel enlarging catheter device CEC is withdrawn and removed leaving the subselective sheath 100 and proximal 0.014 inch guidewire GW<sub>3</sub> in place, as shown in Figure 13u.

Tenth Step: Placement of Connector Device in Proximal Arterio-Venous Passageway:

As an optional step, a connection device may be deployed in the passageway PW. As shown in Figures 13v, a connector device delivery catheter CDC, of the type described in United States Patent Application Serial No. 08/970,694, is then advanced through the subselective sheath 100 and over the 0.014 inch guidewire GW<sub>3</sub> which extends through the proximal arterio-venous passageway PW, to implant a connector device CD within that passageway PW. The connector delivery catheter device is then removed, and the subselective sheath 100 and 0.014 inch guidewire GW<sub>3</sub> are then retracted to a position within the Great Cardiac Vein GCV, proximal to the proximal passageway PW, as shown in Figure 13w, leaving the proximal connector device CD in place within the proximal arterio-venous passageway.

Eleventh Step: Deployment of Blocker into Vein Lumen Proximal to Blockage:

As shown in Figure 13w, the above-described fifth step is then repeated to implant a second blocker device BD within the lumen of the

0 Great Cardiac Vein (GCV), proximal to the proximal arterio-venous  
passageway PW. This completes the procedure, and results in the flow of  
arterial blood from the Circumflex Artery (CX), through the proximal arterio-  
venous passageway PW, through the Great Cardiac Vein GCV and Anterior  
5 Interventricular Vein in the retrograde direction, through the distal arterio-  
venous passageway PW, and into the Left Anterior Descending coronary  
artery LAD, downstream of the blockage AB, as illustrated by the flow-  
indicating arrows on Figure 13x.

***II. A Preferred Method for Performing the PICVA Procedure:***

10 Figures 14a-14m show, in step-by-step fashion, an example of a  
PICVA procedure wherein the catheter system 10 of the present invention  
is used for the purpose causing arterial blood to be rerouted into the Anterior  
Interventricular Vein and caused to subsequently flow through the AIV in  
retrograde fashion (i.e., in a direction opposite normal venous return)  
thereby bypassing an extensive blockage within the patient's Anterior  
15 Descending Coronary Artery (LAD) and perfusing the region of myocardium  
that had been rendered ischemic due to the extensive blockage in the LAD.  
In this PIVA procedure, a coronary sinus access catheter (e.g., a standard  
angiographic catheter such as the modified Simmons-type angiographic  
catheter available from Cook Cardiology, Bloomington, Indiana) is initially  
20 inserted through a femoral vein or external jugular vein approach, using  
standard percutaneous catheter insertion technique. After such initial  
percutaneous catheter insertion has been accomplished, the PICAB  
procedure proceeds as follows:

***First Step: Coronary Sinus Access / Introduction of First Guidewire:***

25 As shown in Figure 14a, an extensive arterial blockage AB extends  
though substantially the entire length of the left anterior descending  
coronary artery (LAD), thereby rendering this patient an unlikely candidate  
for the above-described PICAB procedure because no patent distal portion



0 of the LAD remains available to receive the bypass arterial bloodflow. It is  
appreciated that in cases where the disease AB does not extend into the  
proximal portion of the LAD, a connection may be established between the  
LAD and the AIV proximal to the blockage, but there would be no  
5 opportunity to make a distal connection as required by the PICAB  
procedure. As shown in Figure 14b, a coronary sinus access catheter 500  
is advanced into the coronary sinus CS to assist in the placement of a 0.035  
inch diameter guidewire GW<sub>1</sub> into the great cardiac vein (GCV). This  
10 guidewire GW<sub>1</sub> can be pre-loaded in the lumen of the coronary sinus  
access catheter 500 or can be advanced through the lumen of the coronary  
sinus access catheter 500 after it has been positioned in the coronary sinus,  
as a separate step. Thereafter, the coronary sinus access catheter 500 is  
removed, leaving the 0.035 inch guidewire GW<sub>1</sub> in place.

Second Step: Introduction of Coronary Sinus Guide Catheter / AIV  
Access:

15 As shown in Figure 14c-14d, the coronary sinus guide catheter 200  
with introducer sheath 100 disposed within or through its lumen 202, is  
advanced over the 0.035 inch guidewire GW<sub>1</sub> until the tip of the coronary  
sinus guide catheter 200 is past the "mouth" of the coronary sinus. The  
introducer sheath 100 is then removed, leaving the coronary sinus guide  
20 catheter 200 in place, in the manner shown in Figure 14d.

Third Step: Introduction & Aiming of Tissue-penetrating Catheter:

25 As shown in Figure 14e, the tissue-penetrating catheter 10 is then  
inserted over the pre-positioned 0.035 inch guidewire GW<sub>1</sub>, through the  
lumen 202 of the coronary sinus guide catheter 200, and is advanced using  
fluoroscopy to a position proximal to the arterial blockage AB being  
bypassed. The 0.035 inch guidewire GW<sub>1</sub> is then extracted and removed  
from the first lumen 14 of the tissue-penetrating catheter 10 and an IVUS  
imaging catheter (not shown) is then advanced through that first lumen 14

0        until the IVUS transducer resides within the imaging catheter-receiving  
space of the orientation structure 36. The IVUS catheter is then used to  
receive a 360 degree ultrasound image from a vantage point within the  
interior space of the orientation structure 36. Such image enables the  
operator to see both the resident vessel (the GCV) and the target vessel  
5        (the CX), as well as the reflections or artifacts from the three strut members  
40, 42 & 44 of the orientation structure 36. Because of the disparate  
distancing between the strut members 40, 42 & 44, the reflections or artifacts  
produced by the strut members will form a generally "Y" shaped image as  
illustrated in Figures 2 and 3 of this patent application. The reflection 40<sub>Ref</sub>  
10       produced by the first strut member 40 is clearly distinguishable from the  
reflections 42<sub>Ref</sub>, 44<sub>Ref</sub> produced by the second and third strut members 42,  
43, and provides an indication of the particular direction in which the needle  
member 30 will travel when advanced from the needle outlet opening 46 in  
the side of the catheter body 12. Thus, if the first strut member reflection  
15       40<sub>Ref</sub> observed on the IVUS image *does not* extend directly toward or into  
the lumen of the CX (as illustrated in Figure 3), the operator will rotate the  
tissue-penetrating catheter 10 until such first strut member reflection 40<sub>Ref</sub>  
observed on the IVUS image *does* extend directly toward or into the lumen  
of the CX (as illustrated in Figure 2). This will ensure that the needle  
20       member 30 is properly aimed to enter the CX when advanced.

Fourth Step: Formation of Initial Arterio-Venous Penetration Tract  
Distal to Blockage:

25       As shown in Figure 14f-14h, the tissue penetrating needle member  
30 is then advanced in the distal direction to its extended position such that  
it punctures through the wall of the resident vessel (the GCV), through any  
tissue which may exist between the resident vessel (the GCV) and the  
target vessel (the CX) and into the lumen of the target vessel (the CX) at a  
location downstream of the arterial blockage AB. This maneuver results in

0 the formation of an initial arterio-venous penetration tract PT. With the  
needle member 30 in its extended position and its distal tip in the lumen of  
the target vessel (the CX), a 0.014 inch diameter guidewire GW<sub>2</sub> is inserted  
through the proximal port 27 of the tissue-penetrating catheter  
handpiece/needle controller 15 and advanced through the lumen 31 of the  
5 needle member 30 into the target vessel (the CX), as shown in Figure 14h.  
After the 0.014 inch diameter guidewire GW<sub>2</sub> has been introduced into the  
target vessel (the LAD) the needle member 30 is withdrawn to its retracted  
position, leaving the 0.014 inch diameter guidewire GW<sub>2</sub> extending through  
the initially formed interstitial passageway into the target vessel (the CX) as  
10 shown in Figure 14h. Thereafter, the needle member 30 is withdrawn to its  
retracted position and the tissue-penetrating catheter 10 is withdrawn and  
removed, leaving the 0.014 inch guidewire in place (i.e., extending through  
the newly formed arterio-venous penetration tract PT), as shown in Figure  
14h.

15 *Fifth Step: Enlargement of Penetration Tract to Form Arterio-Venous  
Bloodflow Passageway:*

As shown in Figure 14i, the subselective sheath 100 and its  
introducer 111 are advanced through the guide catheter 203, over the  
second guidewire GW<sub>2</sub> to a location where the distal end of the  
20 subselective sheath 100 is within the AIV immediately adjacent the distal  
penetration tract PT. Thereafter, the introducer 111 is withdrawn and a  
channel enlarging catheter device CEC, of the type described in United  
States Patent Application 09/056,589, is advanced over the 0.014 inch  
guidewire GW<sub>2</sub> which extends through the arterio-venous penetration tract  
25 PT, thereby the dilating or enlarging that tract to form an arterio-venous  
bloodflow passageway PW. This step of the procedure provides control  
over the diameter or size of the arterio-venous bloodflow passageways PW  
and helps to ensure that the passageways PW will remain patent and

0 functional following completion of the procedure. After such enlargement of the penetration tract to form the intended passageway PW, the channel enlarging catheter device CEC is withdrawn and removed, leaving the subselective sheath 100 and second guidewire GW<sub>2</sub> in place.

5 Sixth Step: Placement of Connector Device in Arterio-Venous Bloodflow Passageway:

It may be desirable, in an optional step as shown in Figures 14j-14k, to place a connector device within the passageway PW. A connector device delivery catheter CDC, of the type described in United States Patent Application Serial No. 08/970,694, is advanced over through the subselective sheath 100 and over the 0.014 inch guidewire GW<sub>2</sub> which extends through the arterio-venous passageway PW, to implant a connector device CD within that passageway PW. The connector delivery catheter device CDC is then removed, and the subselective sheath 100 and the 0.014 inch guidewire GW<sub>2</sub> that had extended through the distal arterio-venous passageway PW are then retracted to a position proximal to the passageway PW..

15 Seventh Step: Deployment of Blocker into Vein Lumen Proximal to Blockage:

As shown in Figures 14l-14m, the guidewire GW<sub>2</sub> is then removed and one or more embolic blocker members BM are introduced into the proximal end of the subselective sheath 100, pushed through the lumen of the subselective sheath 100 using a pusher rod (not shown) and expelled into the lumen of the Great Cardiac Vein (GCV) proximal to the bloodflow passageway PW where such embolic blocker(s) expand and engage the wall of the vein to cause substantial occlusion and blockage of bloodflow through the vein at that location. Examples of such blocker members BM and their methods of implantation are described in United States Patent Application Serial No. 09/117,516. The 0.035 inch diameter guidewire GW<sub>1</sub>,

0 is then removed, and an embolic blocker member BM is inserted into the proximal end of the subselective sheath. A push rod is then advanced through the lumen of the blocker delivery catheter to push the embolic blocker member BM out of the distal end of the subselective sheath and into its desired position within the lumen of the coronary vein (the GCV). It is to be noted that this blocker deployment step may be performed at this point in the procedure, or alternatively may be delayed until a later time in the procedure. This completes the procedure, and results in the flow of arterial blood from the Circumflex Artery (CX), through the arterio-venous passageway PW, through the Great Cardiac Vein GCV and Anterior Interventricular Vein in the retrograde direction so as to perfuse the myocardium that has been rendered ischemic due to the blockage of the Left Anterior Descending coronary artery (LAD) as illustrated by the flow indicating arrows on Figure 14m.

15 It is to be understood and appreciated that the invention has been described herein with reference to certain presently preferred embodiments and examples only, and no effort has been made to exhaustively describe all possible embodiments and examples of the invention. Indeed, as those skilled in the art will appreciate, various additions, deletions, modifications and variations may be made to the particular embodiments and examples described hereabove without departing from the intended spirit and scope of the invention. For example, where this patent application has listed the steps of a method or procedure in a specific order, it may be possible (or even expedient in certain circumstances) to change the order in which some steps are performed, and it is intended that the particular steps of the method or procedure claims set forth herebelow not be construed as being order-specific unless such order specificity is expressly stated in the claim. Another example is that, although the specific procedures described in detail in this application involve penetrating through tissue located within an

0

"acceptable penetration zone," such acceptable penetration zone need not be occupied by tissue but rather such acceptable penetration zone may fully or partially comprise an open space such as a body cavity or void. Accordingly, it is intended that all such additions, deletions, modifications and variations be included within the scope of the following claims.

---

---

0

## CLAIMS

What is claimed is:

1. A tissue penetrating catheter device useable to penetrate outwardly from the lumen of a blood vessel in which the catheter device is positioned, through the wall of that blood vessel, and to a target location, said device comprising:

i) a flexible catheter body which is insertable into the vein, said catheter body having a side wall, a proximal end, a distal end and an outlet opening formed in the side wall thereof ;

ii) an first lumen through which a separate imaging catheter may be inserted;

iii) a second lumen which extends through said outlet opening;

iv) a tissue penetrating member disposed within said second lumen and advanceable out of said outlet opening; and,

v) an orientation structure positioned on the catheter body, said orientation structure having a) an imaging catheter-receiving space

formed therein in alignment with said first lumen and b) at least one marker member located on one side of the imaging catheter receiving space, said at least one marker being positioned and constructed to create on an image display received from an imaging catheter positioned within the imaging catheter-

receiving space, an indication of the path that will be followed by the tissue penetrating member as the tissue penetrating member is advanced from the catheter body.

2. The catheter device of Claim 1 wherein a guidewire lumen which extends longitudinally through said tissue penetration member.
3. The catheter device of Claim 1 wherein the orientation structure comprises a plurality of strut members that extend longitudinally, at circumferentially spaced-apart locations, about said hollow interior space, a first one of said strut members being a) located at a radial position which is aligned with location of the tissue penetration member outlet opening and b) constructed to produce an ultrasound image which is distinguishable from the images produced by the other(s) of said strut members, said first one of said strut members being thereby operative to create, on an image received through an IVUS catheter positioned within hollow interior space.
4. The catheter device of Claim 3 further comprising:  
a distal tip member formed on the distal end of said orientation apparatus.
5. The catheter device of Claim 4 wherein a lumen extends through the distal tip member such that an imaging catheter may be advanced from the hollow interior space of the orientation structure through the lumen of the distal tip member.



6. The catheter device of Claim 1 wherein the tissue penetration member is resilient and has a distal portion which is preformed to a curved configuration, such that when the tissue penetration member is in its retracted position it will conform to the shape of the first lumen of the catheter body and when the tissue penetration member is in its extended position its distal portion will assume the curved configuration to which it was preformed.
  7. The catheter device of Claim 6 wherein the distal portion of said tissue penetration member is preformed to a curved configuration which has a radius of curvature.
  8. The catheter device of Claim 1 wherein said tissue penetration member has a lancet type bevel formed on its distal end.
  9. The catheter device of Claim 6 further comprising:  
a rigid, tubular tissue penetration member housing disposed within said second lumen such that, when the tissue penetration member is in its retracted position, the distal tip of the tissue penetration member will be disposed within said tissue penetration member housing.
- 
10. The catheter device of Claim 9 wherein said tissue penetration member housing is curved outwardly toward said tissue penetration member outlet aperture.
  11. The catheter device of Claim 10 wherein the catheter body is slightly bent to conform with the curvature of said tissue penetration member housing.

12. The catheter device of Claim 9 wherein a tubular liner is disposed within the tubular tissue penetration member housing.
13. The catheter device of Claim 12 wherein said tubular liner is formed of plastic.
- ~~14.~~ ~~The catheter device of Claim 12 wherein said tubular liner comprises an inner lubricious layer, a middle structural layer and an outer adhesive layer.~~
15. The catheter device of Claim 12 wherein said tubular liner extends out of and beyond either end of the tubular tissue penetration member housing.
16. The catheter device of Claim 10 wherein a locator body is connected to said tubular tissue penetration member housing and disposed within said catheter body to stabilize the position and rotational orientation of said tubular tissue penetration member housing.
- ~~17.~~ ~~The catheter device of Claim 11 wherein the frictionally engaged surfaces are formed on said tissue penetration member and said catheter body to deter rotation of the tissue penetration member relative to the catheter body.~~
18. The catheter device of Claim 17 wherein said frictionally engaged surfaces comprise a key formed on one of said tissue penetration member and said catheter body and a

keyway formed on the of said catheter and catheter body, said key being received within said keyway to deter rotation of the tissue penetration member within the catheter body.

19. The catheter device of Claim 17 wherein said frictionally engaged surfaces comprise a non-round cross sectional configuration of said tissue penetration member and a non-round cross-sectional configuration of at least a portion of the catheter which surrounds said tissue penetration member, such that the tissue penetration member is deterred from rotating within the catheter body.

20. A system for creation of a penetration tract from the lumen of a coronary vein to the lumen of a coronary artery in a mammalian heart which has a coronary venous sinus, said system comprising a catheter device according to Claim 1 in combination with:

a coronary sinus guide catheter which comprises a flexible catheter body having a proximal end, a distal end, a lumen extending longitudinally therethrough, and a curvilinear segment formed near its distal end;

said catheter device being passable through the lumen of the coronary sinus guide catheter and into a coronary vein.

21. The system of Claim 20 wherein said coronary sinus guide catheter further comprises:

a hemostatic valve associated with the lumen of the guide catheter, said hemostatic valve being constructed to allow the catheter device to pass therethrough, and said hemostatic valve being operative to:

- i) prevent blood from back-flowing out of the coronary sinus guide catheter lumen when the catheter device is not inserted therethrough, and,
- ii) form a seal about the catheter device when the catheter device is inserted through the lumen of the guide catheter to prevent blood from back-flowing therethrough.

22. — The system of Claim 20 further comprising:

- an tubular introducer sheath having a tapered distal end and a lumen extending longitudinally therethrough;
- said introducer sheath being passable through the lumen of the coronary sinus guide catheter and into the coronary vein; and,
- said catheter device being insertable through the lumen of the introducer sheath and into the coronary vein, distal to the distal end of the introducer sheath.

23. A tissue-penetrating catheter device that is positionable in the lumen of a blood vessel and useable to form a penetration tract that extends from the lumen of the blood vessel, through the wall of that blood vessel, through a predetermined acceptable penetration zone and to a target location within the patient's body, said catheter device comprising:

- i) ~~a flexible catheter body that is~~ insertable into a blood vessel, said catheter body having a proximal end, a distal end, a outlet opening;
- ii) a lumen that extends through said outlet opening;
- iii) a tissue penetrating member disposed within said lumen, said tissue

penetrating member being sized and configured such that when sufficiently aimed and stabilized, it will advance out of the outlet port, through the wall of the blood vessel, through the acceptable penetration zone and to said target location;

iv) a stabilizer that is configured to deter the tissue penetrating member from deviating from said acceptable penetration zone as it is advanced to said target location.

24. The catheter device of Claim 23 wherein a guidewire lumen extends longitudinally through said tissue penetration member.

25. The catheter device of Claim 23 wherein the stabilizer is selected from the group of stabilizers consisting of;

engagement members for frictional engagement between the tissue penetrating member and the catheter body;

bushings disposed within the lumen that constrains the tissue penetrating member to prevent side-to-side movement thereof;

a reduced diameter region of the lumen that constrains the tissue penetrating member to prevent side-to-side movement thereof;

~~at least one magnet that creates a magnetic which prevents~~  
side to side movement of the tissue penetrating member; and,

a member that is laterally deployable from the catheter adjacent the outlet opening to deter side-to-side movement of the tissue-penetrating-member when it is advanced from the catheter.

26. The catheter device of Claim 23 wherein the stabilizer comprises:

a rigid, tubular tissue penetration member housing disposed within said second lumen such that, when the tissue penetration member is in its retracted position, the distal tip of the tissue penetration member will be disposed within said tissue penetration member housing.

27. The catheter device of Claim 26 wherein said tissue penetration member housing is curved outwardly toward said tissue penetration member outlet aperture.

28. The catheter device of Claim 27 wherein the catheter body is slightly bent to conform with the curvature of said tissue penetration member housing.

29. The catheter device of Claim 26 wherein a tubular liner is disposed within the tubular tissue penetration member housing.

29. The catheter device of Claim 29 wherein said tubular liner is formed of plastic.

31. The catheter device of Claim 29 wherein said tubular liner comprises an inner lubricious layer, a middle layer and an outer adhesive layer.

32. The catheter device of Claim 29 wherein said tubular liner extends out of and beyond either end of the tubular tissue penetration member housing.

33. The catheter device of Claim 31 wherein a stabilizer body is connected to said tubular tissue penetration member housing and disposed within said catheter body to stabilize the position and rotational orientation of said tubular tissue penetration member housing.

34. The catheter device of Claim 23 wherein the tissue penetration member is curved such that rotation of the tissue penetrating member while it is advanced from the catheter will cause the tissue penetration member to deviate from the acceptable penetration zone and wherein said stabilizer comprises frictionally engaged surfaces formed on said tissue penetration member and said catheter body to deter rotation of the tissue penetration member relative to the catheter body.

35. The catheter device of Claim 34 wherein said frictionally engaged surfaces comprise a key formed on one of said tissue penetration member and said catheter body and a keyway formed on the other of said catheter and catheter body, said key being received within said keyway to deter rotation of the tissue penetration member within the catheter body.

---

36. The catheter device of Claim 34 wherein said frictionally engaged surfaces comprise the lateral surface of a tissue penetration member of non-round cross sectional configuration and a corresponding non-round cross-sectional configuration of at least a portion of the catheter which surrounds said tissue penetration member, such that the tissue penetration member is deterred from rotating within the catheter body.

37. The catheter device of Claim 23 wherein said stabilizer comprises

a laterally deployable member adjacent the outlet port, said laterally deployable member being initially disposable in a stowed position whereby it is substantially non-protrusive from the catheter and subsequently deployable to a laterally extended position wherein it supports the tissue penetrating member and deters the tissue penetrating member from deviating from the acceptable penetration zone as it is advanced.

38. The catheter device of Claim 1 further comprising a laterally deployable member adjacent the outlet port, said laterally deployable member being initially disposable in a stowed position whereby it is substantially non-protrusive from the catheter and subsequently deployable to a laterally extended position wherein it supports the tissue penetrating member and deters the tissue penetrating member from deviating from the acceptable penetration zone as it is advanced.

39. The catheter of Claim 1 further comprising a rotational lock apparatus for preventing at least a portion of the tissue penetration member from rotating within the catheter while the tissue penetration member is in its retracted position.

---

40. The catheter of Claim 23 further comprising a rotational lock apparatus for preventing at least a portion of the tissue penetrating member from rotating within the catheter while the tissue penetration member is in its retracted position.

41. The catheter device of Claim 40 wherein said rotational lock apparatus comprises a first member formed on the catheter body and a



second member formed on the tissue penetration member such that, when the tissue penetration member is in its retracted position, the first and second members will frictionally engage one another to prevent rotation of at least the portion of the tissue penetrating member that is distal to the second member.

42. A catheter system for forming a penetration tract from the lumen of a coronary blood vessel of a mammalian patient to a target location within the patient's body, said catheter system comprising:

a. a coronary sinus guide catheter having a distal end, said coronary sinus guide catheter being configured to be advanced transluminally through the patient's venous vasculature until its distal end is positioned in the patient's coronary venous sinus;

b. a tissue penetrating catheter that is insertable through the lumen of the coronary sinus guide catheter, said tissue penetrating catheter comprising:

i) a flexible catheter body having a proximal end, a distal end

and an outlet port formed in one side thereof ;

ii) a lumen which extends through said outlet port; and,

iii) a tissue penetrating member disposed within said lumen and advanceable out of said outlet port;

c. a subselective sheath that comprises a tube having a

lumen and a distal end, said tube being sized to be advanced through the lumen of the coronary sinus guide catheter.

43. The system of Claim 42 further comprising:

a coronary sinus guide introducer having a tapered distal portion and a guidewire lumen that extends longitudinally therethrough, said coronary sinus guide introducer being insertable through the lumen of the coronary sinus guide catheter such that its tapered distal portion protrudes out of and beyond the distal end of the coronary sinus guide catheter;

44. The system of Claim 42 further comprising:

a subselective sheath introducer having a tapered distal portion and a guidewire lumen that extends longitudinally therethrough, said subselective sheath introducer being insertable through the lumen of the subselective sheath such that its tapered distal portion protrudes out of and beyond the distal end of the subselective sheath.

45. A method for performing a percutaneous in situ coronary venous arterialization, said method comprising:

A. providing a catheter system that includes:

i) a coronary sinus guide catheter having a distal end, said coronary sinus guide catheter being configured to be advanced transluminally through the patient's venous vasculature until its distal end is positioned in the patient's coronary venous sinus;

ii) a tissue penetrating catheter that comprises a) a flexible catheter body having a proximal end, a distal end and an outlet port formed in one side thereof; b) a lumen that extends through said outlet port; and, c) a tissue penetrating member having a lumen extending longitudinally therethrough,

said tissue penetrating member being disposed within said lumen and advanceable out of said outlet port;

iii) a subselective sheath having a distal end and a lumen that extends longitudinally therethrough, said sheath being sized to be advanced through the lumen of the coronary sinus guide catheter; B. inserting a first guidewire having a proximal end and a distal

~~end such the distal end of said first guidewire is in the coronary~~  
venous vasculature and its proximal end is outside of the patient's body;

C. advancing the coronary sinus guide catheter over the first guidewire to a position where the distal end of the coronary sinus guide catheter is within the coronary sinus;

D. advancing the tissue penetrating catheter through the lumen of the

coronary sinus guide catheter and over the first guidewire, to a position within a coronary vein;

E. rotationally orienting the tissue penetrating catheter to aim the tissue penetrating member at a location within the lumen of an artery;

F. advancing the tissue penetrating member from the catheter to form a penetration tract through a predetermined acceptable penetration zone that includes penetration through the wall of the vein and the wall of the artery, such that the distal end of the tissue penetration member is in the lumen of the artery;

G. passing a second guidewire through the lumen of the tissue penetrating member and into the lumen of the artery;

H. retracting the tissue penetration member into the tissue penetrating catheter and removing the tissue penetrating catheter, leaving the second guidewire in place;

I. thereafter advancing the subselective sheath through the lumen of the coronary sinus guide catheter and over the second

guidewire to a position where the distal end of the subselective sheath is located within the vein adjacent the penetration tract formed in Step F;

J. providing a tract enlarging catheter, advancing said tract enlarging catheter through the subselective sheath and using the tract enlarging catheter to enlarge the penetration tract formed in Step F to create a bloodflow passageway between the vein and artery;

K. removing the tract enlarging catheter, leaving the subselective sheath and second guidewire in place;

L. providing a connector delivery catheter and a connector that is deployable into the bloodflow passageway to maintain said bloodflow passageway after completion of the operative procedure and passing the connector delivery catheter through the subselective sheath and delivering said connector into said bloodflow passageway;

M. removing the connector delivery catheter leaving the subselective sheath and second guidewire in place;

N. retracting the subselective sheath to a location within the vein that is proximal to the location of the bloodflow passageway;

O. removing the second guidewire;

P. delivering through the subselective sheath a blocker member to block the lumen of the vein proximal to the location of the bloodflow passageway; and,

Q. removing the subselective sheath and coronary sinus guide catheter.

46. The method of Claim 45 wherein the catheter system provided in

Step A further comprises:

a coronary sinus guide introducer having a tapered distal portion and a guidewire lumen that extends longitudinally therethrough, said

coronary sinus guide introducer being insertable through the lumen of the coronary sinus guide catheter such that its tapered distal portion protrudes out of and beyond the distal end of the coronary sinus guide catheter;

and wherein Step C comprises:

~~placing the coronary sinus guide introducer through the lumen of the coronary sinus guide catheter such that at least part of its tapered distal portion protrudes out of the guide catheter's distal end;~~

inserting the proximal end of the first guidewire into the guidewire lumen of the coronary sinus guide introducer and advancing the coronary sinus guide catheter and coronary sinus guide introducer over the first guidewire until the distal end of the coronary sinus guide catheter is in the coronary sinus; and,

~~removing the coronary sinus guide introducer leaving the coronary sinus guide catheter and first guidewire in place.~~

47. The method of Claim 45 wherein the catheter system provided in

Step A further comprises:

a subselective sheath introducer having a tapered distal portion and a guidewire lumen that extends longitudinally therethrough, said subselective sheath introducer being insertable through the lumen of the

subselective sheath such that its tapered distal portion protrudes out of and beyond the distal end of the subselective sheath;

and wherein Step G comprises:

placing the subselective sheath introducer through the lumen of the subselective sheath such that at least part of its tapered distal portion protrudes out of the subselective sheath's distal end;

inserting the proximal end of the second guidewire into the guidewire lumen of the subselective sheath introducer and advancing the subselective sheath and subselective sheath introducer over the first guidewire until the distal end of the subselective sheath is positioned in the coronary vein adjacent to said penetration tract; and,

removing the subselective sheath introducer leaving the subselective sheath and second guidewire in place.

---

48. The method of Claim 45 wherein Step G is eliminated and the tract enlarging catheter of Step G is advanced into position and utilized without the subselective sheath.

49. The method of Claim 45 wherein Steps I and J comprise:

- I. removing the tract enlarging catheter and subselective sheath, leaving the second guidewire in place;
- J. providing a connector delivery catheter and a connector that

is deployable into the bloodflow passageway to maintain said bloodflow passageway after completion of the operative procedure, advancing the connector delivery catheter over the second guidewire and delivering said connector into said bloodflow passageway.

50. The method of Claim 45 wherein the tissue penetrating catheter provided in Step A further comprises:

\_\_\_\_\_an imaging catheter lumen through which a separate imaging catheter may be inserted; and,

an orientation structure positioned on the catheter body, said orientation structure having an imaging catheter-receiving space formed therein in alignment with said first lumen and at least one marker member located on one side of the imaging catheter receiving space, said at least one marker being positioned and constructed to create on an image display received from an imaging catheter positioned within the imaging catheter-receiving space, an indication of the \_\_\_\_\_

and wherein Step E comprises:

inserting an imaging catheter through the imaging catheter lumen and into the imaging catheter receiving space; using said imaging catheter to image the target location within said artery; rotating the tissue penetrating catheter as necessary to cause the indication of the path that will be followed by the tissue penetrating member as the tissue penetrating member is advanced from

the catheter body to indicate that said tissue penetrating member will pass into said target location within said artery.

51. The method of Claim 45 wherein the tissue penetrating catheter provided in Step A further comprises:

a stabilizer that is configured to deter the tissue penetrating member from deviating from said acceptable penetration zone as it is advanced to said target location; and,

wherein Step F comprises;

advancing the tissue penetrating member while utilizing said stabilizer to prevent the tissue penetrating member from deviating from said acceptable penetration zone, thereby forming a penetration tract through the acceptable penetration zone that includes penetration through the wall of the vein and the wall of the artery, such that the distal end of the tissue penetration member is in the lumen of the artery.

52. A method for performing a percutaneous in situ coronary artery bypass, said method comprising:

AA. providing a catheter system that includes:

i) a coronary sinus guide catheter having a distal end, said coronary sinus guide catheter being configured to be advanced transluminally through the patient's venous vasculature until its distal end is positioned in the patient's coronary venous sinus;

ii) a tissue penetrating catheter that comprises a) a flexible catheter body having a proximal end, a distal end and an outlet port formed in one side thereof; b) a lumen that extends through said outlet port; and, c) a tissue penetrating member having a lumen extending longitudinally therethrough, said tissue penetrating



member being disposed within said lumen and advanceable out of said outlet port;

iii) a subselective sheath having a distal end and a lumen that extends longitudinally therethrough, said sheath being sized to be advanced through the lumen of the coronary sinus guide catheter;

AB. inserting a first guidewire having a proximal end and a distal end into the patient such the distal end of said first guidewire is in the coronary venous vasculature and its proximal end is outside of the patient's body;

AC. advancing the coronary sinus guide catheter over the first guidewire to a position where the distal end of the coronary sinus guide catheter is within the coronary sinus;

AD. advancing the tissue penetrating catheter through the lumen of the

coronary sinus guide catheter and over the first guidewire, to a first position within a coronary vein;

AE. rotationally orienting the tissue penetrating catheter to aim the tissue penetrating member at a first target location within the lumen of an artery;

AF. advancing the tissue penetrating member from the catheter to form a first penetration tract distal to the obstruction, said first penetration tract extending through a predetermined acceptable penetration zone that includes penetration through the wall of the vein and the wall of the artery, such that the distal end of the tissue penetration member enters the lumen of the artery;

AG. passing a second guidewire through the lumen of the tissue penetrating member and into the lumen of the artery;

AH. retracting the tissue penetration member into the tissue penetrating catheter and removing the tissue penetrating catheter, leaving the second guidewire in place;

AI. advancing the subselective sheath over the first guidewire to a location that is distal to the first penetration tract formed in Step AF;

AJ. delivering through the subselective sheath a blocker member to block the lumen of the vein distal to the first penetration tract;

AK. removing the subselective sheath, leaving the first guidewire in place;

AL. advancing the tissue penetrating catheter through the lumen of the coronary sinus guide catheter and over the first guidewire, to a second position within a coronary vein;

AM. rotationally orienting the tissue penetrating catheter to aim the tissue penetrating member at a second target location within the lumen of an artery;

AN. advancing the tissue penetrating member from the catheter to form a second penetration tract proximal to the obstruction, said second penetration tract extending through a predetermined acceptable penetration zone that includes penetration through the wall of the vein and the wall of the artery, such that the distal end of the tissue penetration member enters the lumen of the artery;

AO. passing a third guidewire through the lumen of the tissue penetrating member and into the lumen of the artery;

AP. retracting the tissue penetration member into the tissue penetrating catheter and removing the tissue penetrating catheter, leaving the third guidewire in place;

AQ. advancing the subselective sheath through the lumen of the coronary sinus guide catheter and over the second guidewire to a position where the distal end of the subselective sheath is located within the vein adjacent the first penetration tract formed in Step AF;

AR. providing a tract enlarging catheter, advancing said tract enlarging catheter through the subselective sheath and using the tract enlarging catheter to enlarge the first penetration tract formed in

Step AF to create a bloodflow passageway between the vein and artery distal to the obstruction;

AS. removing the tract enlarging catheter, leaving the subselective sheath and second guidewire in place;

AT. providing a connector delivery catheter and a connector that is deployable into the bloodflow passageway to maintain said bloodflow passageway after completion of the operative procedure and passing the connector delivery catheter through the subselective sheath and delivering said connector into said bloodflow passageway;

AU. removing the connector delivery catheter, subselective sheath and second guidewire;

AV. advancing the subselective sheath through the lumen of the coronary sinus guide catheter and over the third guidewire to a position where the distal end of the subselective sheath is located within the vein adjacent the second penetration tract formed in Step AN;

AW. providing a tract enlarging catheter, advancing said tract enlarging catheter through the subselective sheath and using the tract enlarging catheter to enlarge the second penetration tract formed in Step AN to create a proximal bloodflow passageway between the vein and artery proximal to the obstruction;

AX. removing the tract enlarging catheter, leaving the subselective sheath and third guidewire in place;

AY. providing a connector delivery catheter and a connector that is deployable into the proximal bloodflow passageway to maintain said bloodflow passageway after completion of the operative procedure and passing the connector delivery catheter through the subselective sheath and delivering said connector into said proximal bloodflow passageway;

AZ. removing the connector delivery catheter;

BA. retracting the subselective sheath to a location within the vein that

is proximal to the location of the bloodflow passageway;

BB. removing the third guidewire;

BC. delivering through the subselective sheath a blocker member to

block the lumen of the vein proximal to the location of the proximal bloodflow passageway; and,

BD. removing the subselective sheath and coronary sinus guide catheter.

53. The method of Claim 52 wherein the catheter system provided in Step AA further comprises:

a coronary sinus guide introducer having a tapered distal portion and a guidewire lumen that extends longitudinally therethrough, said coronary sinus guide introducer being insertable through the lumen of the coronary sinus guide catheter such that its tapered distal portion protrudes out of and beyond the distal end of the coronary sinus guide catheter;

wherein Step AC comprises:

placing the coronary sinus guide introducer through the lumen of the coronary sinus guide catheter such that at least part of its tapered distal portion protrudes out of the guide catheter's distal end;

inserting the proximal end of the first guidewire into the guidewire lumen of the coronary sinus guide introducer and

advancing the coronary sinus guide catheter and coronary sinus guide introducer over the first guidewire until the distal end of the coronary sinus guide catheter is in the coronary sinus; and,

removing the coronary sinus guide introducer leaving the coronary sinus guide catheter and first guidewire in place.

54. The method of Claim 52 wherein the catheter system provided in

Step AA further comprises:

a subselective sheath introducer having a tapered distal portion and a guidewire lumen that extends longitudinally therethrough, said subselective sheath introducer being insertable through the lumen of the subselective sheath such that its tapered distal portion protrudes out of and beyond the distal end of the subselective sheath;

~~wherein Step AQ comprises:~~

placing the subselective sheath introducer through the lumen of the subselective sheath such that at least part of its tapered distal portion protrudes out of the subselective sheath's distal end;

inserting the proximal end of the second guidewire into the guidewire lumen of the subselective sheath introducer and advancing the subselective sheath and

subselective sheath introducer over the first guidewire until the distal end of the subselective sheath is positioned in the coronary vein adjacent to said first penetration tract formed in Step AF; and,

removing the subselective sheath introducer leaving the subselective sheath and second guidewire in place;


and wherein Step AQ comprises:

placing the subselective sheath introducer through the lumen of the subselective sheath such that at least part of its tapered distal portion protrudes out of the subselective sheath's distal end;



inserting the proximal end of the third guidewire into the guidewire lumen of the subselective sheath introducer and advancing the subselective sheath and subselective sheath introducer over the first guidewire until the distal end of the subselective sheath is positioned in the coronary vein adjacent to said second penetration tract formed in Step AN; and,

removing the subselective sheath introducer leaving the subselective sheath and third guidewire in place;


55. The method of Claim 52 wherein Steps AQ and AV are eliminated and the tract enlarging catheter of Steps AR and AW advanced into position and utilized without the subselective sheath.

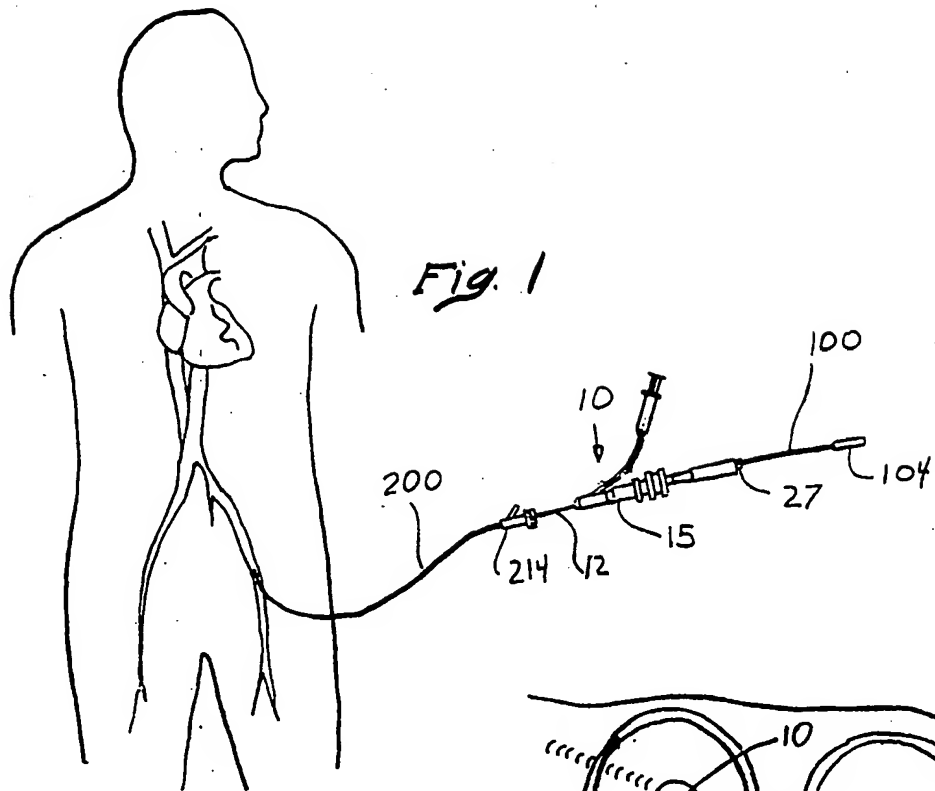

*Fig 2*

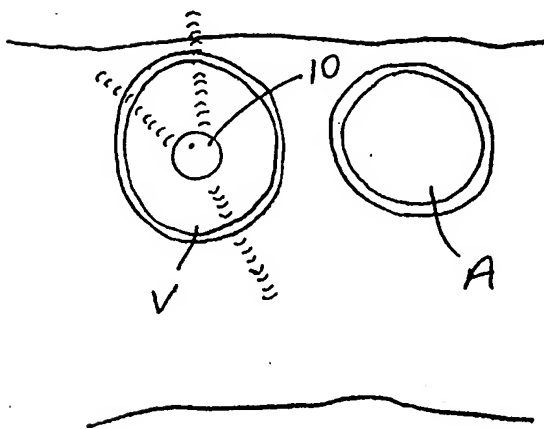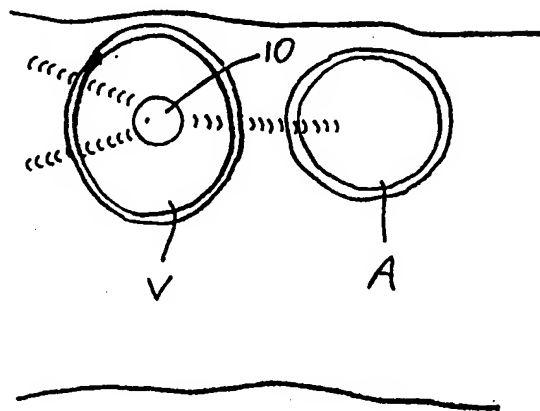

*Fig. 3*

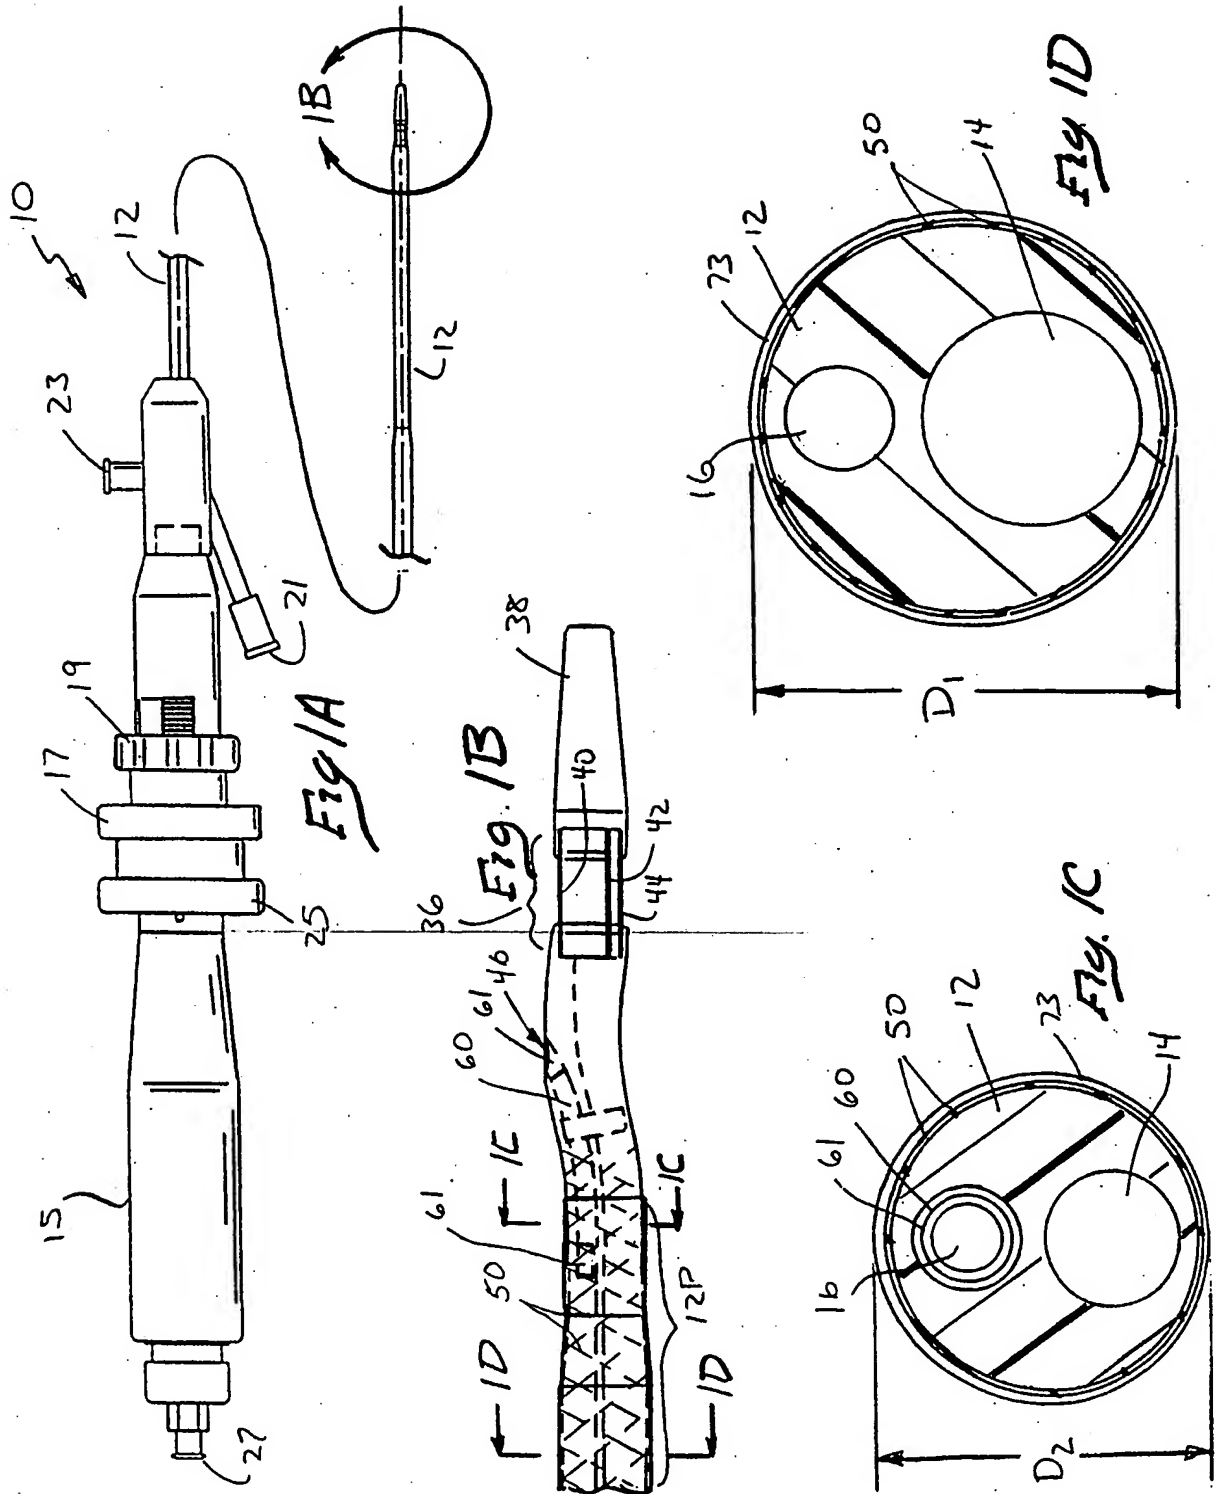



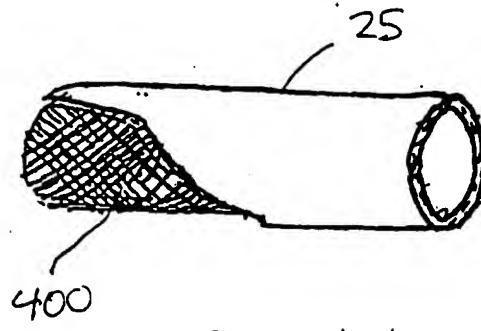


Fig. 1a'

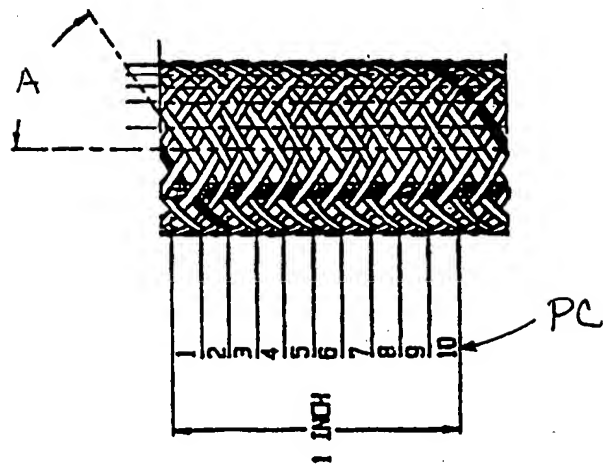


Fig. 1a''

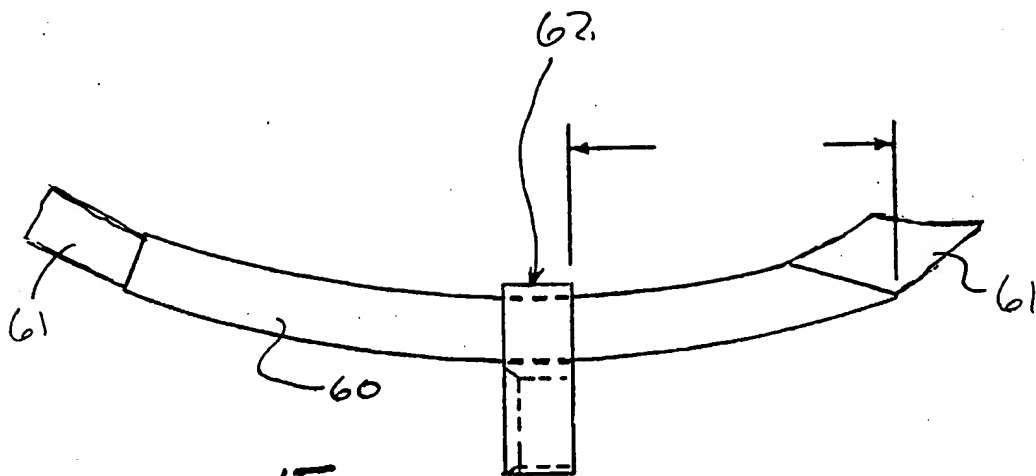


FIG 1E

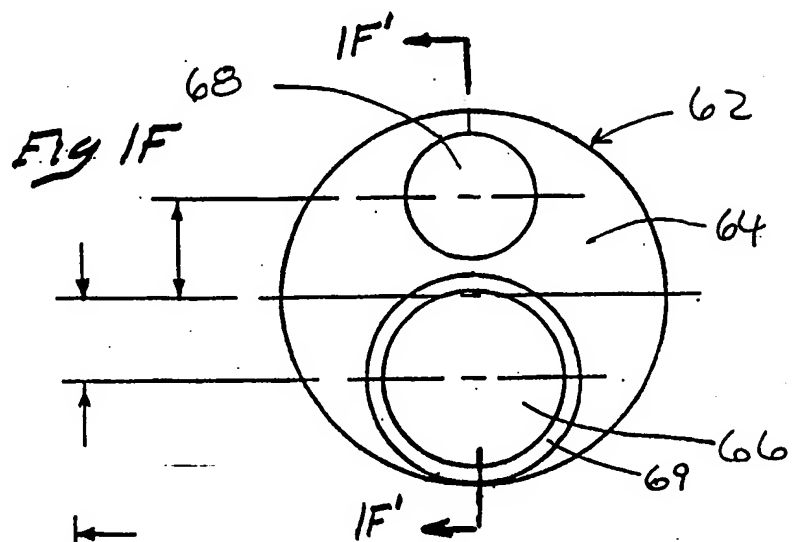


FIG 1F








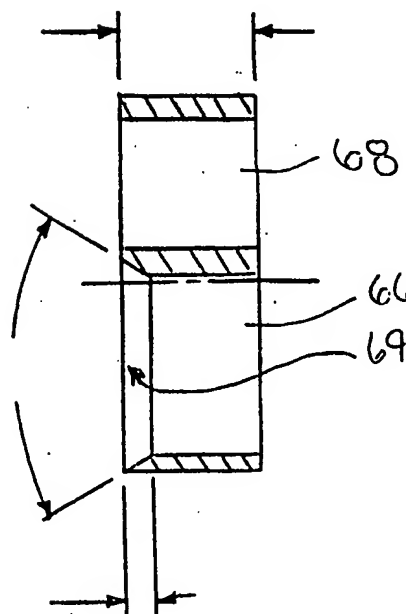





FIG 1F'

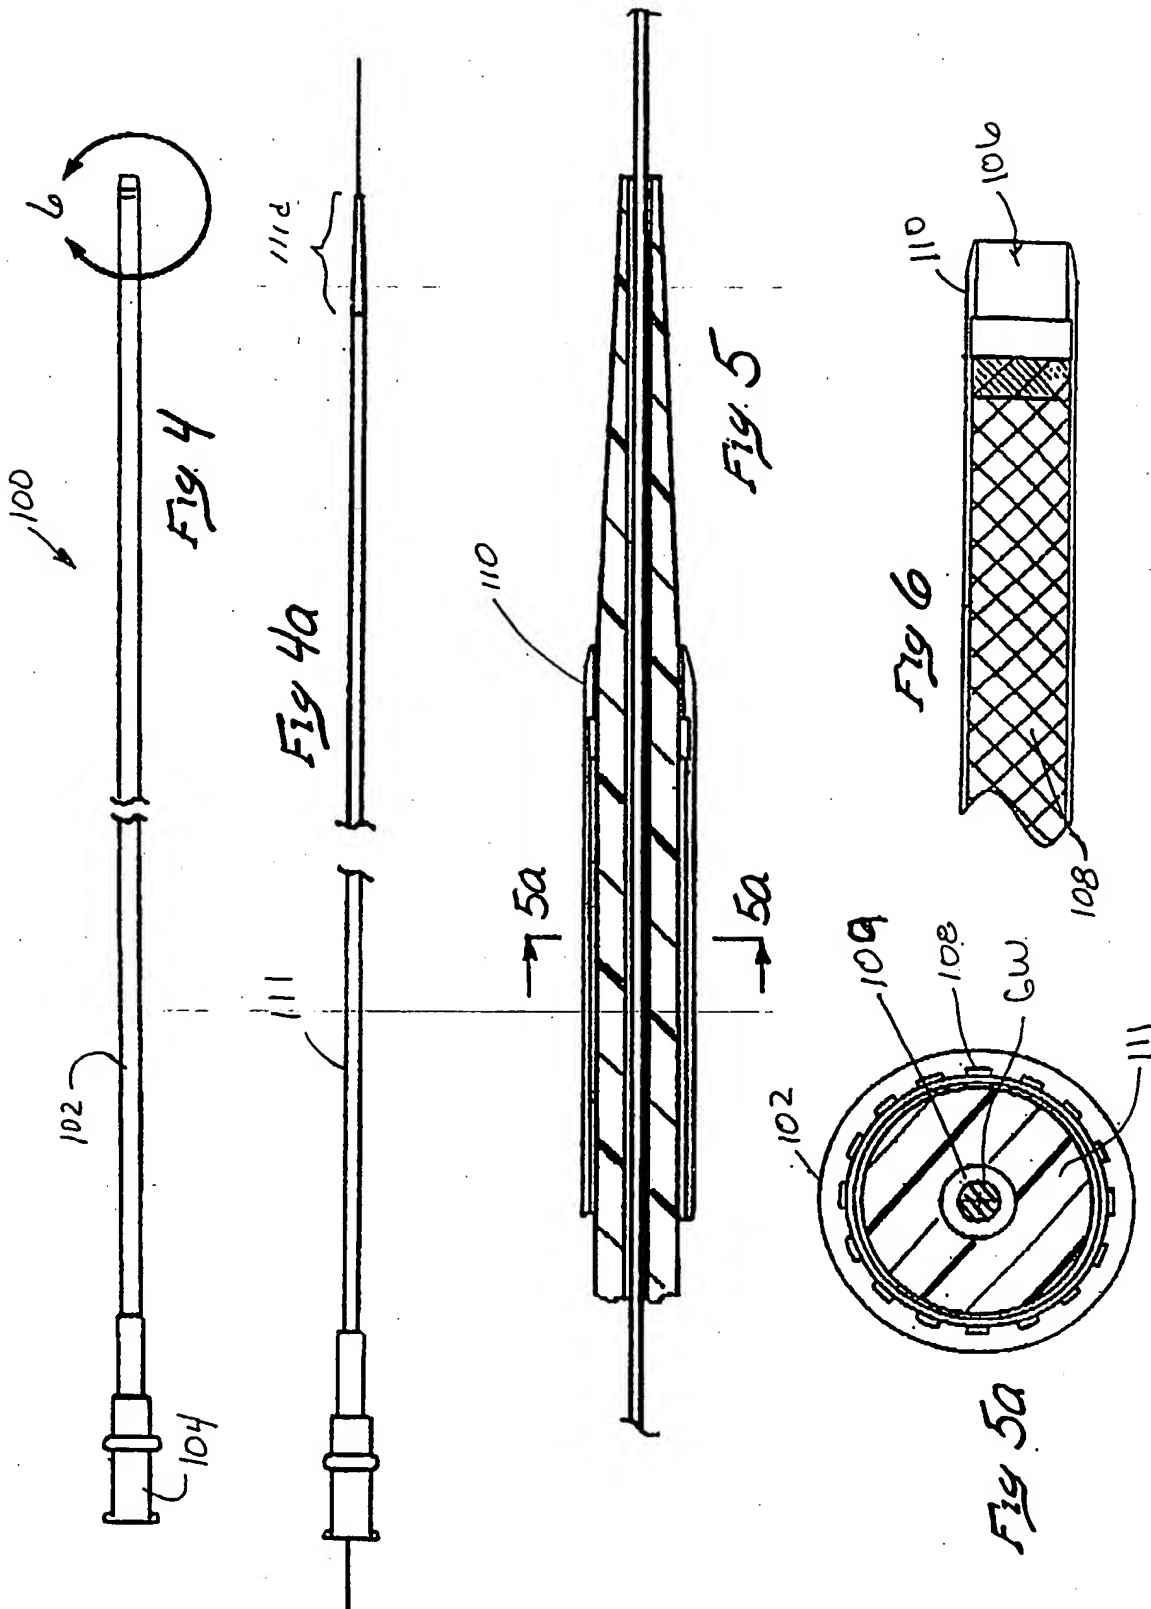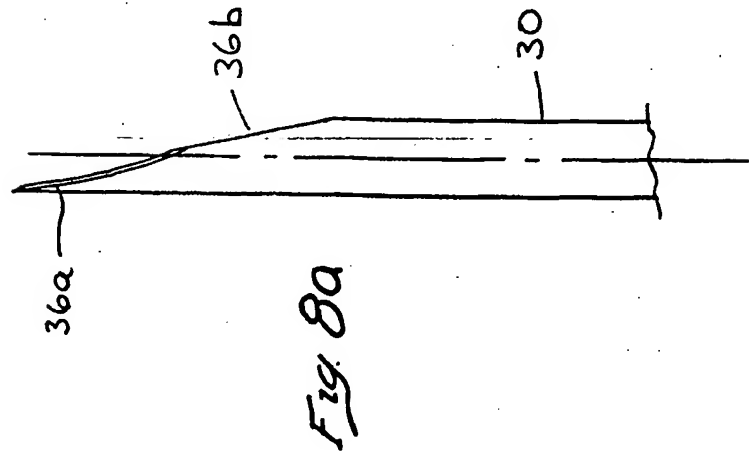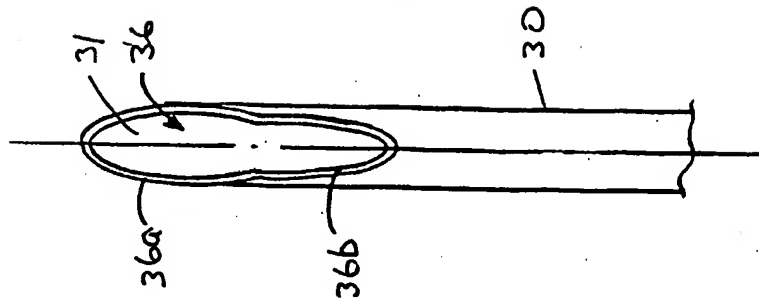
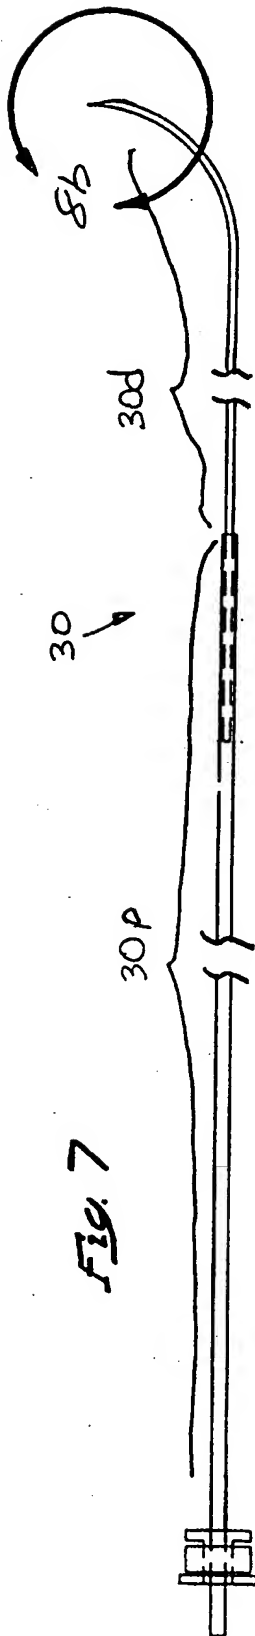


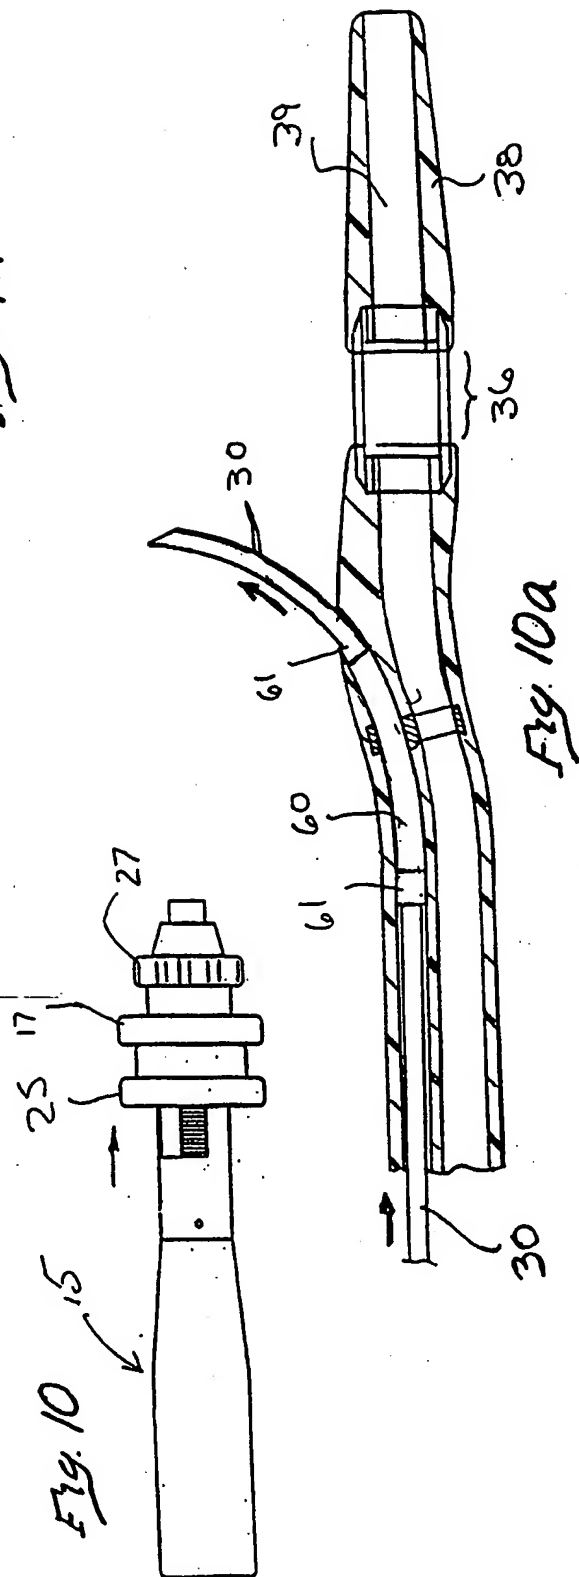

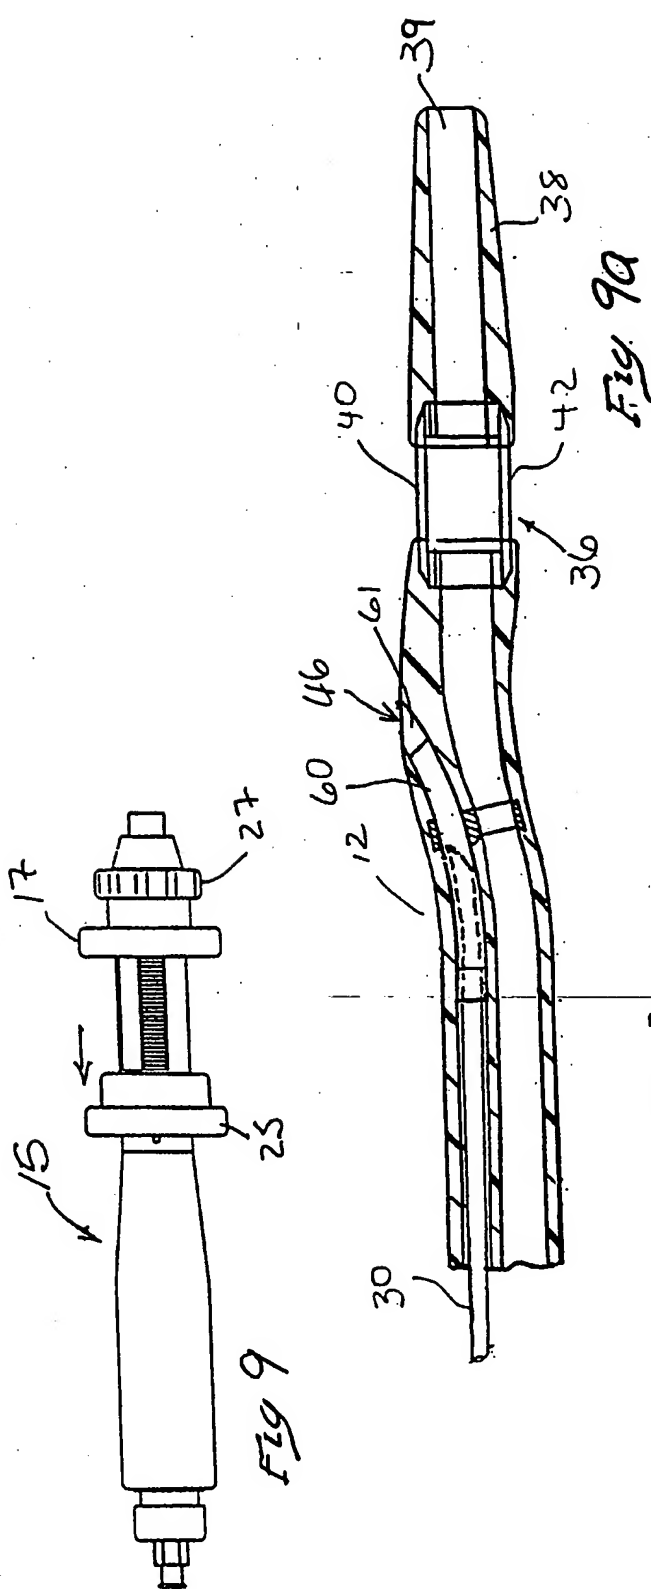



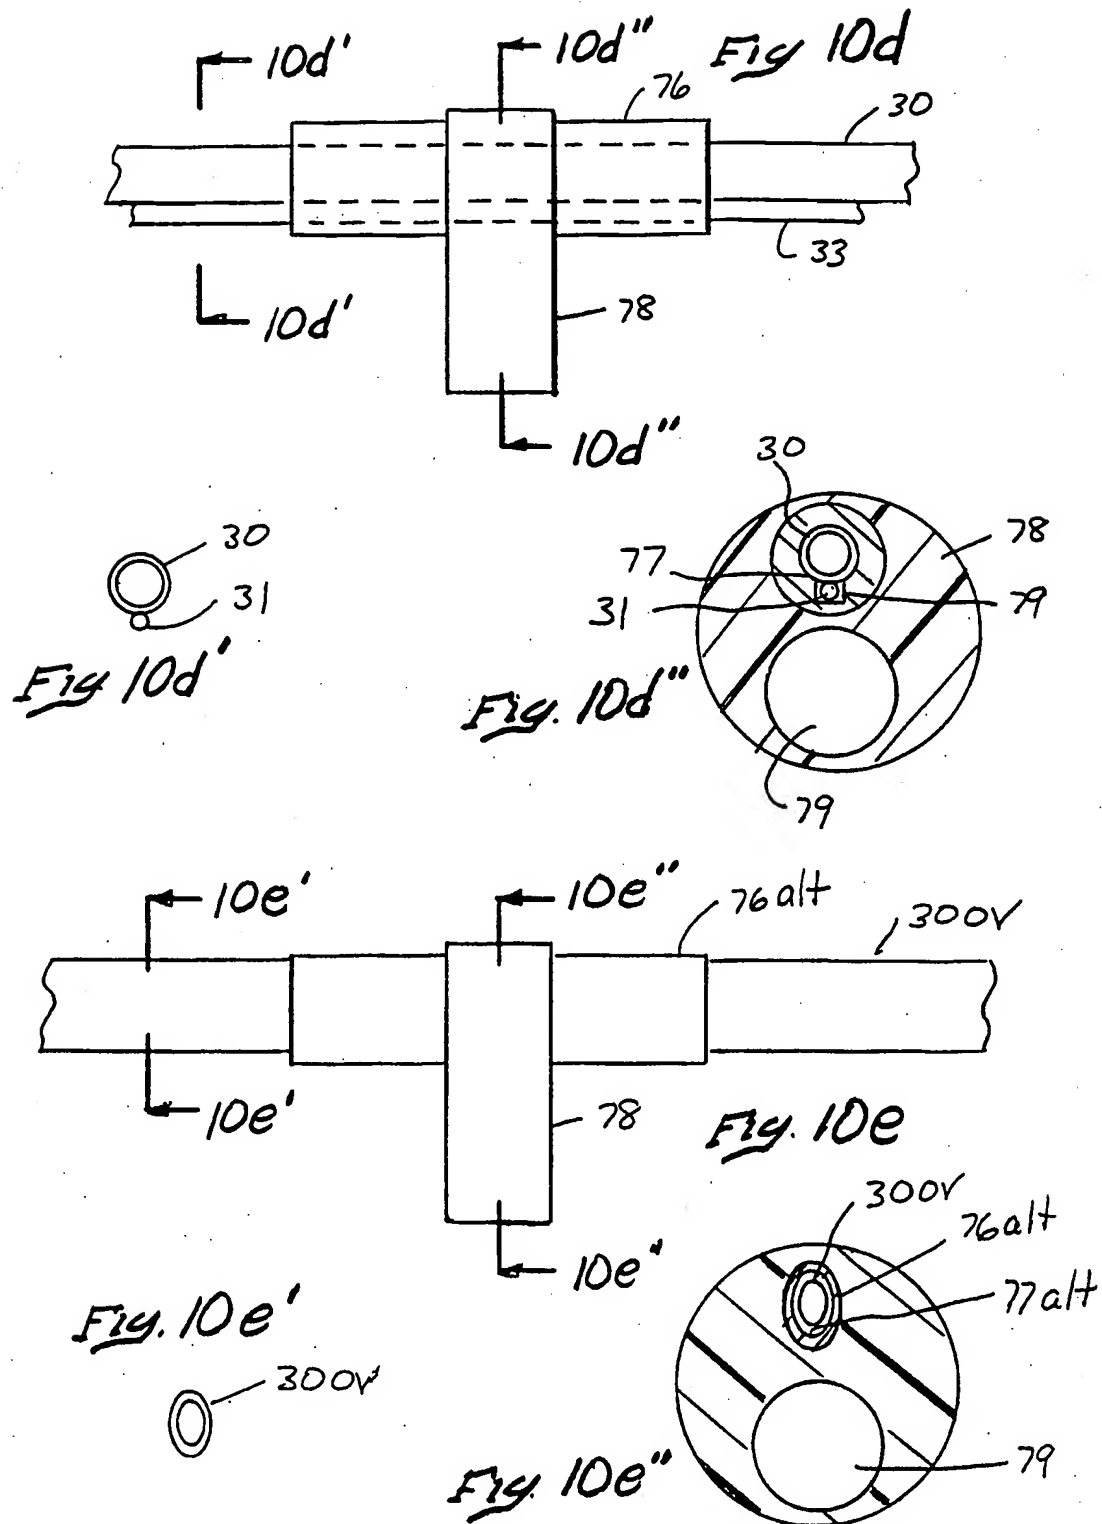


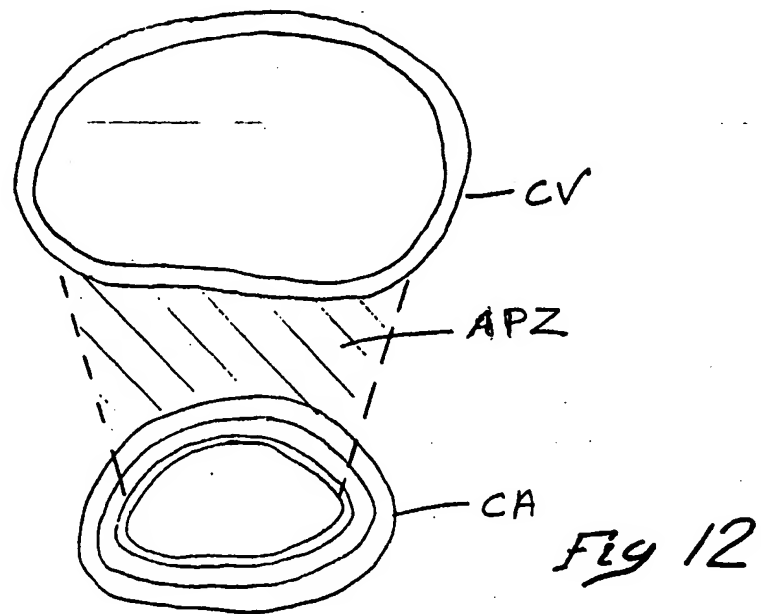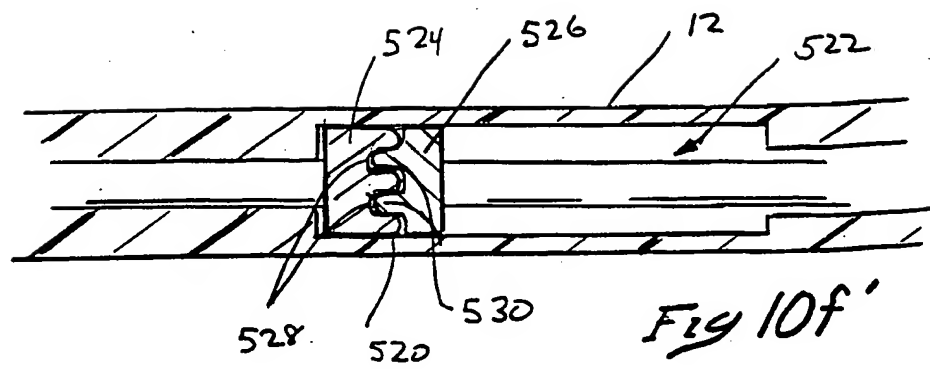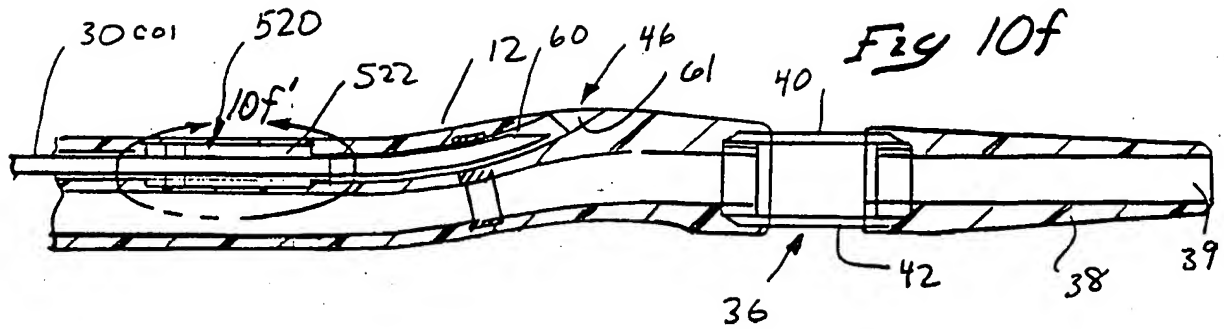


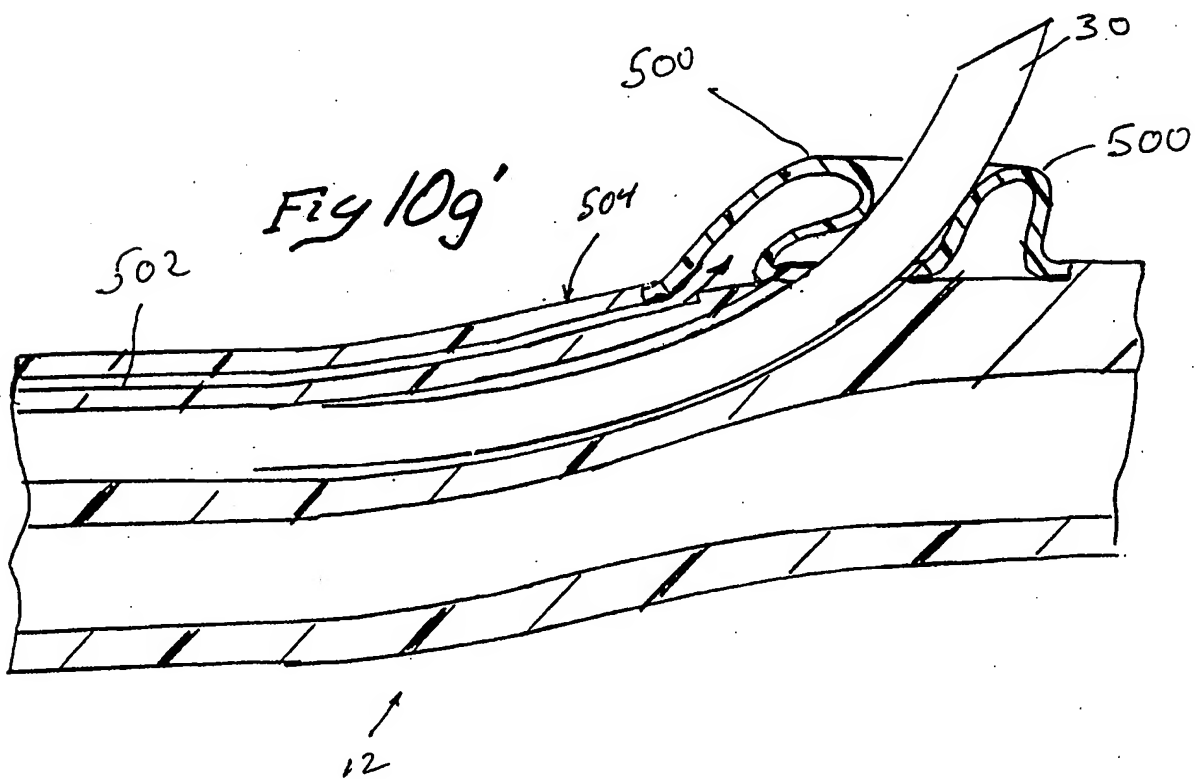
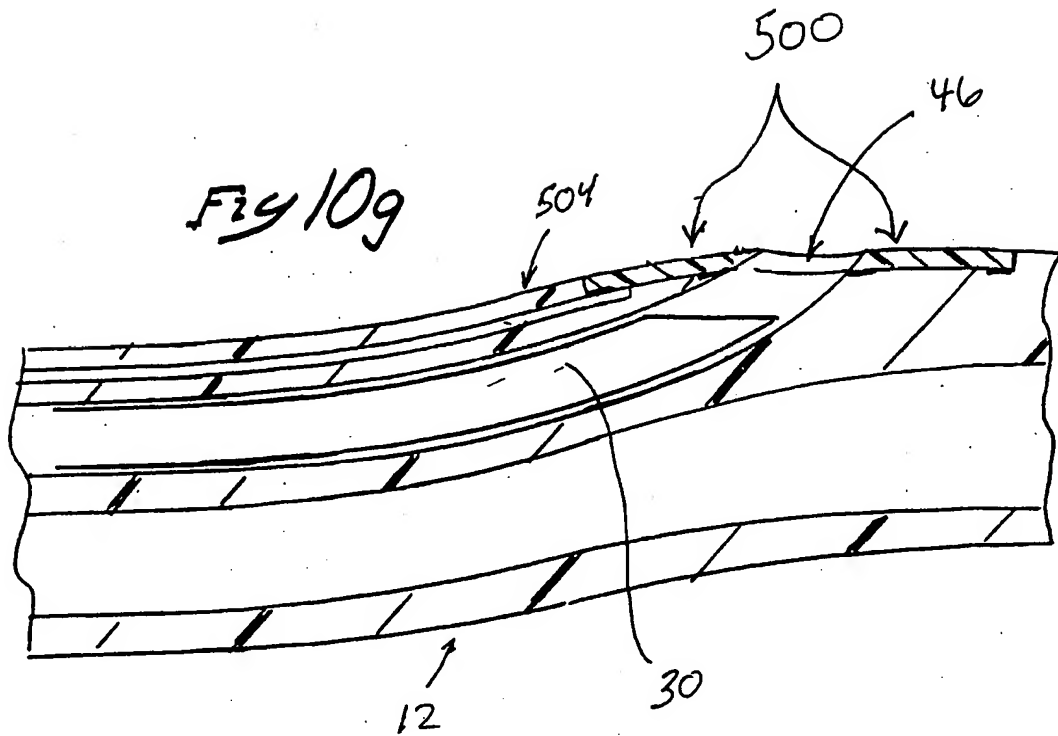







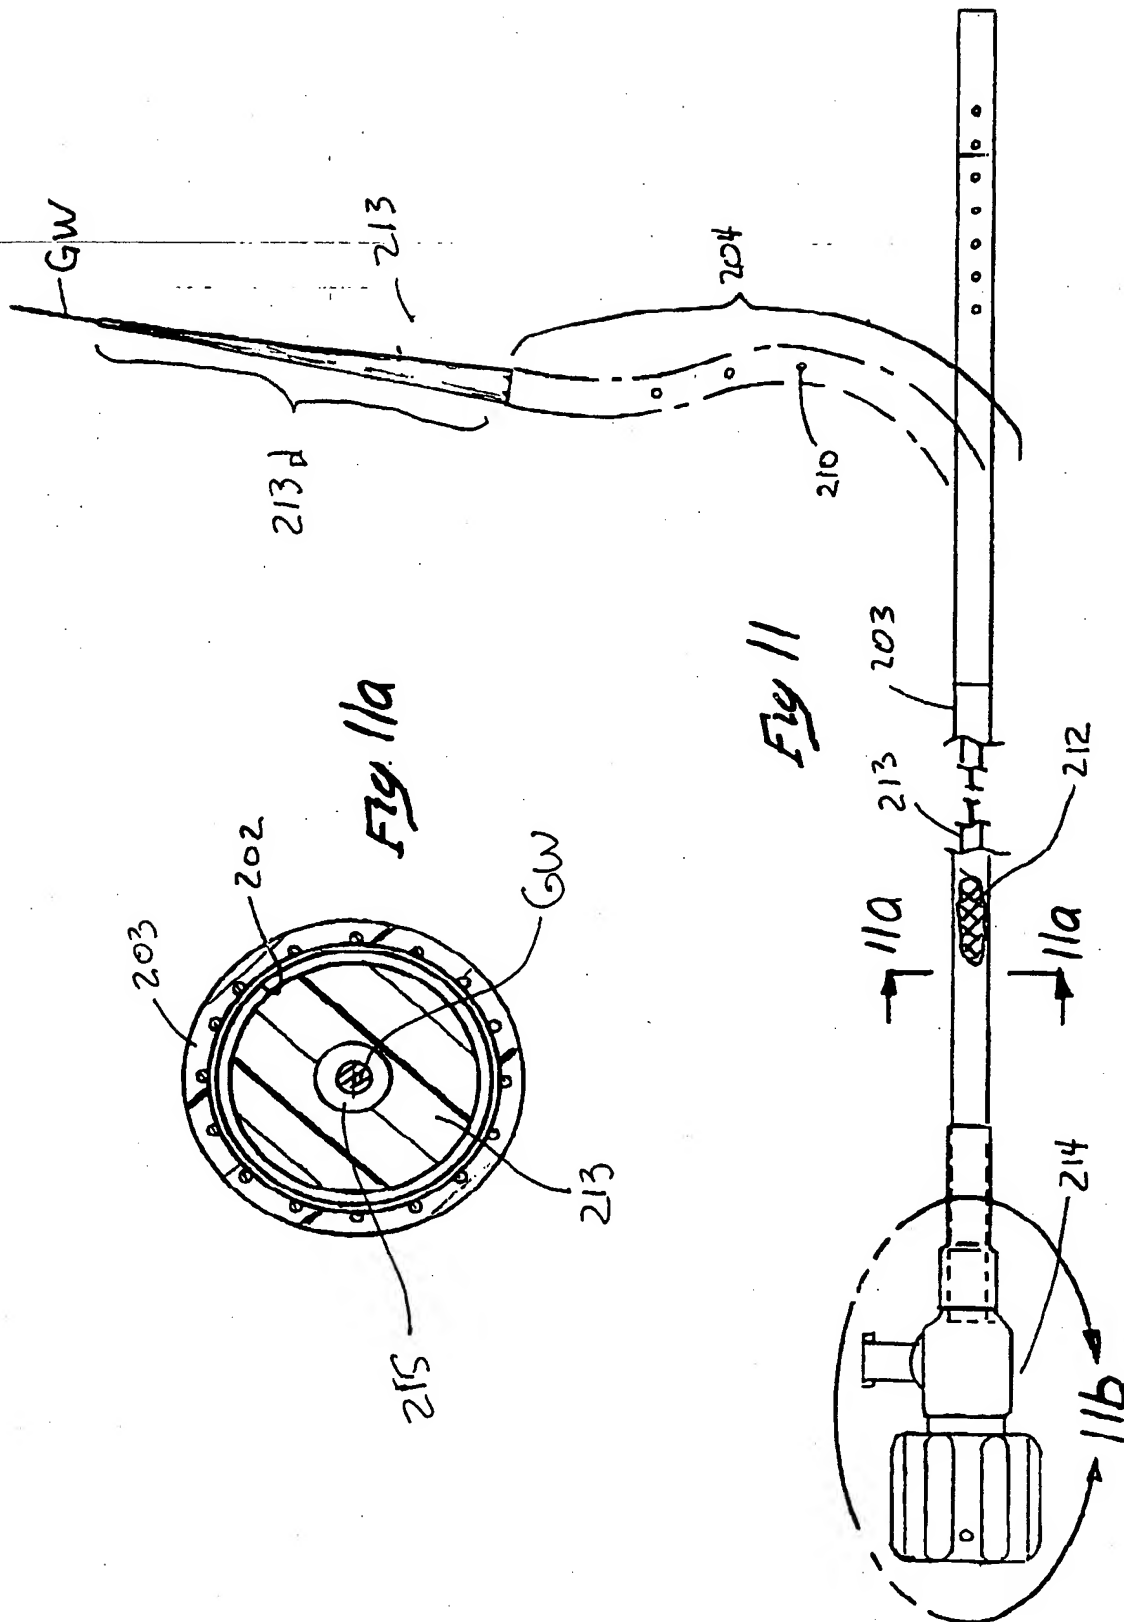


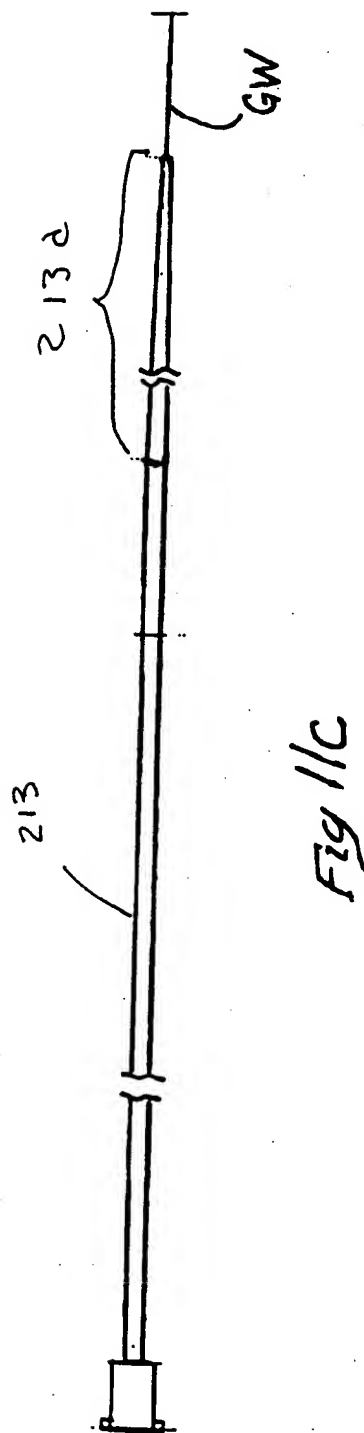
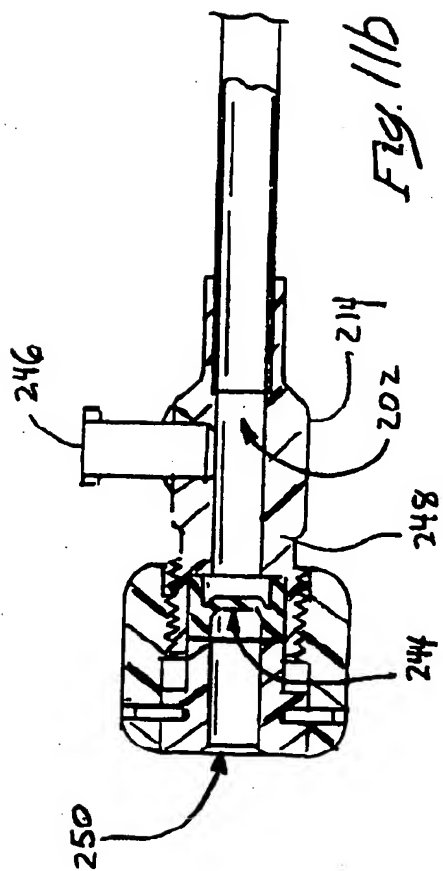



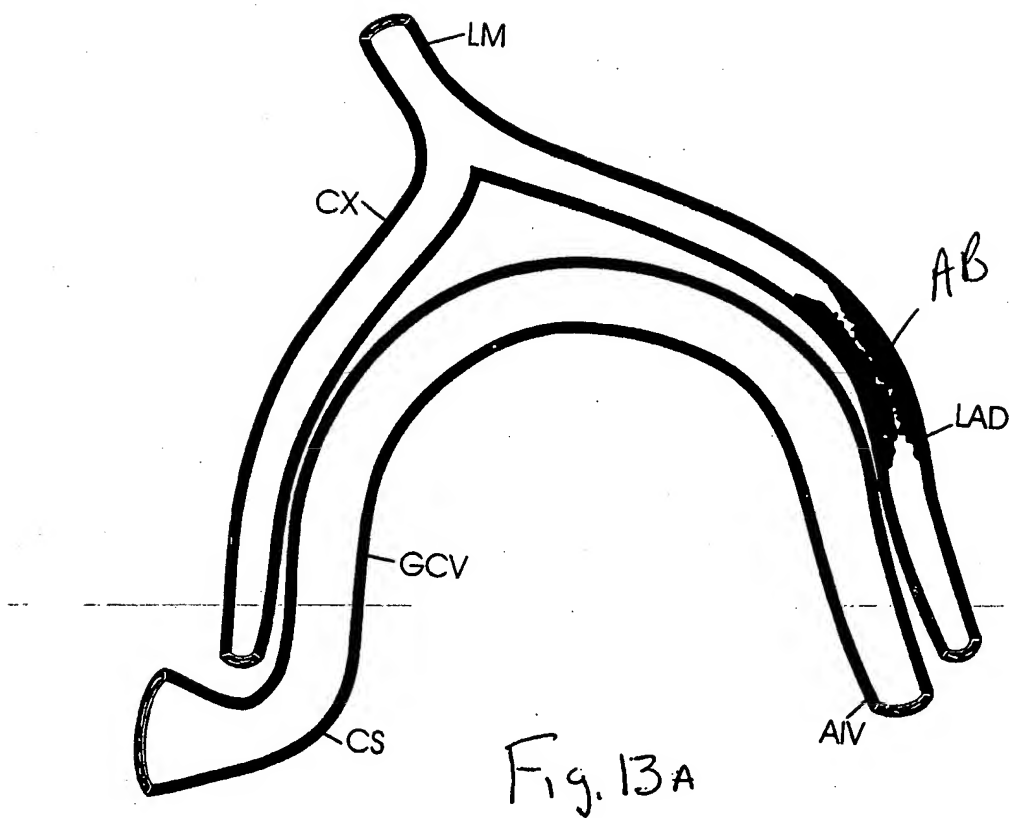


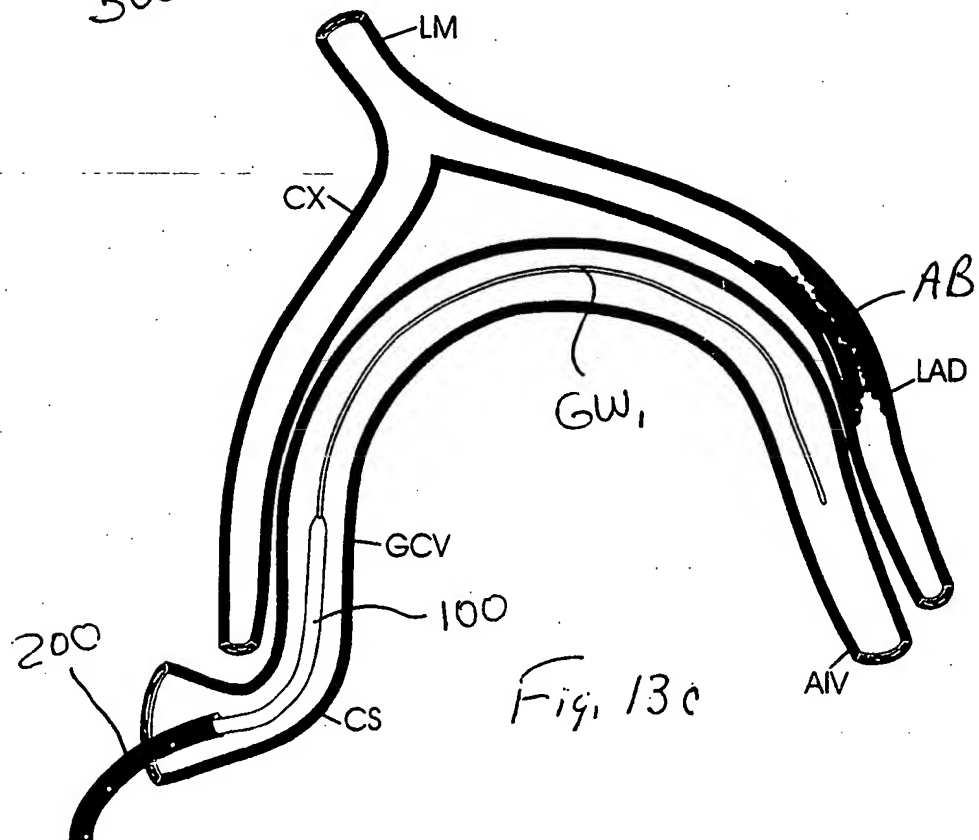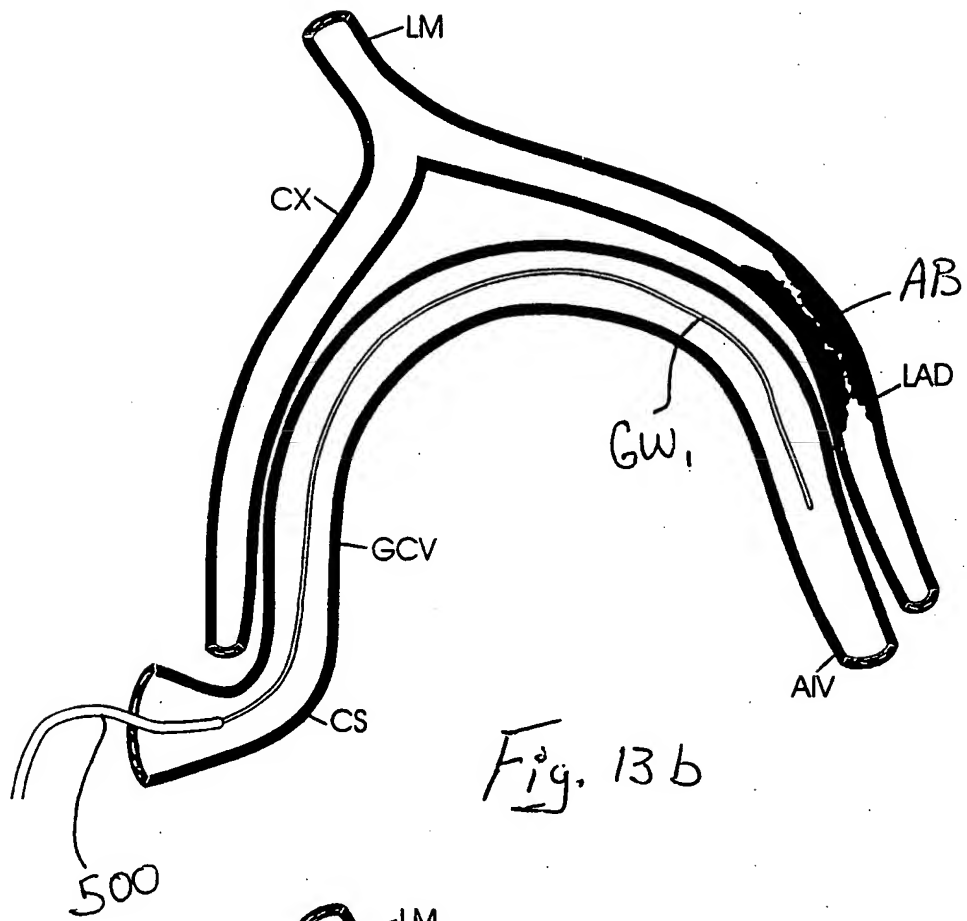

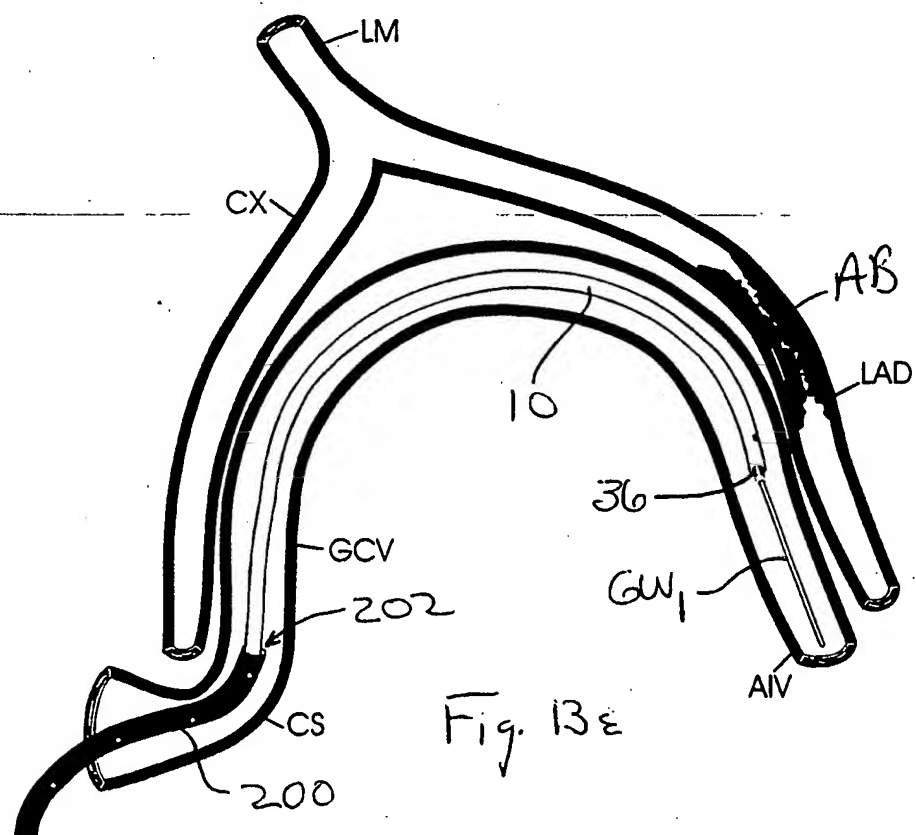
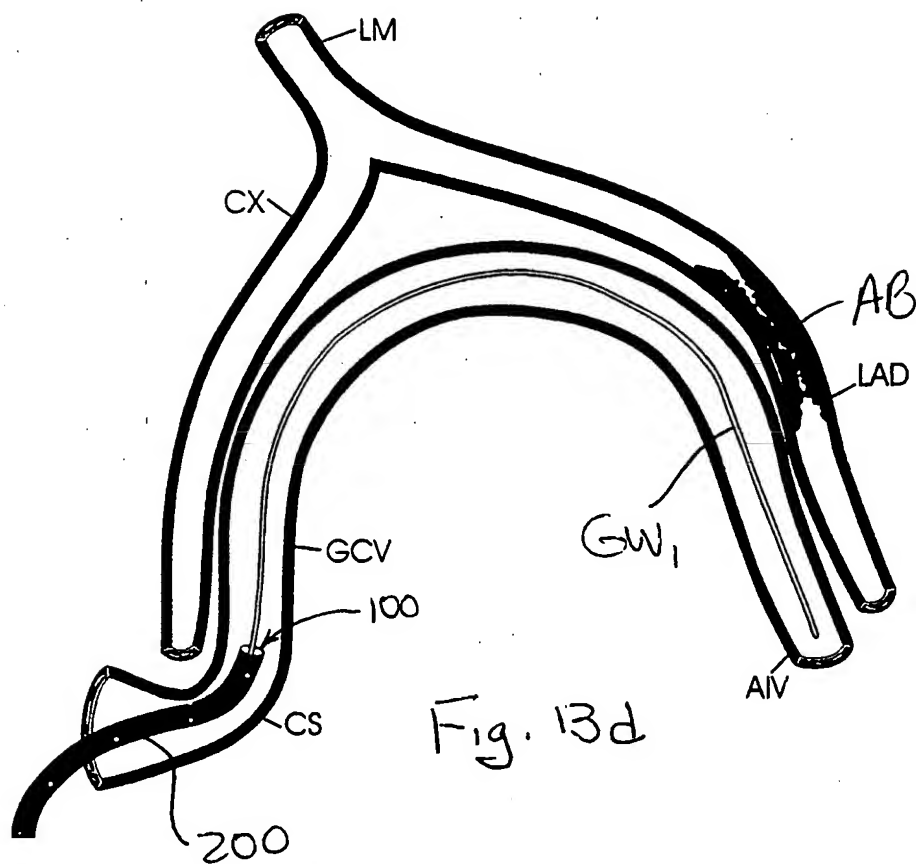


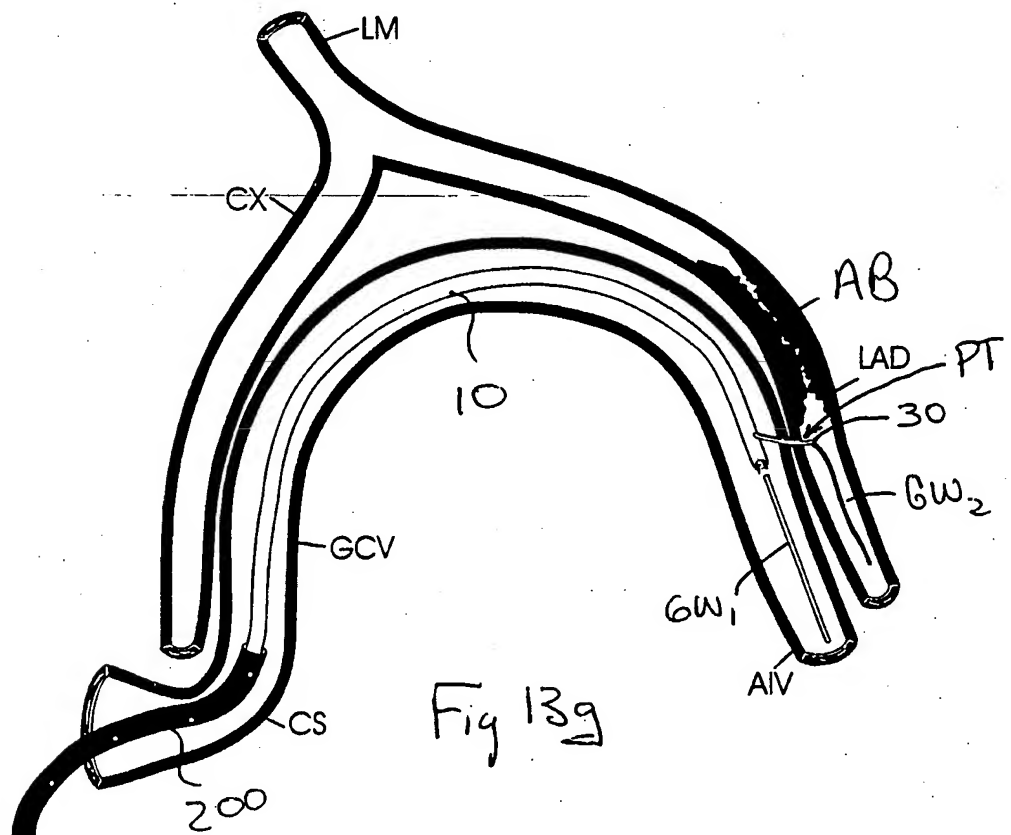
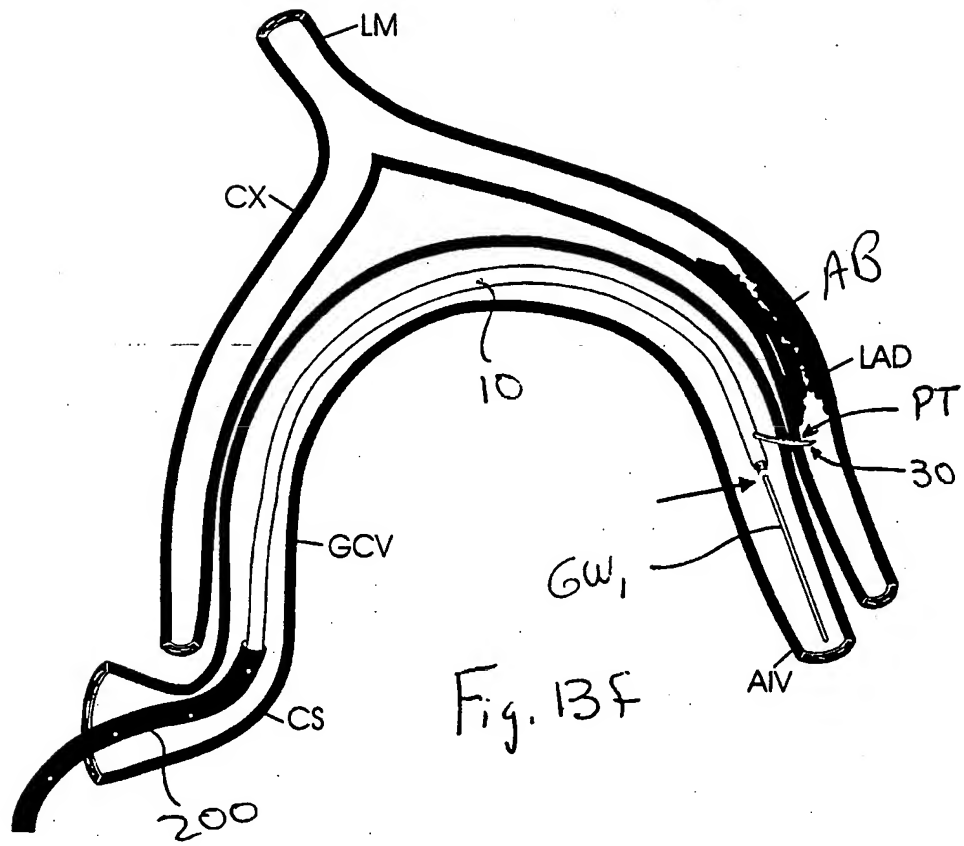


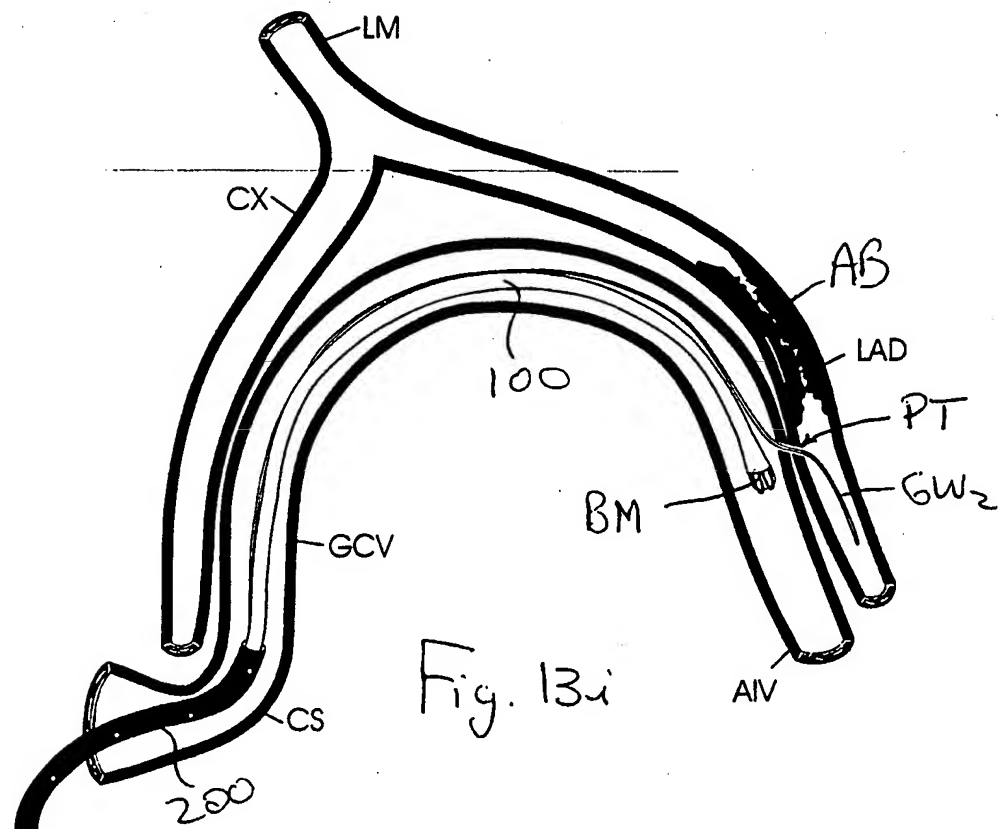
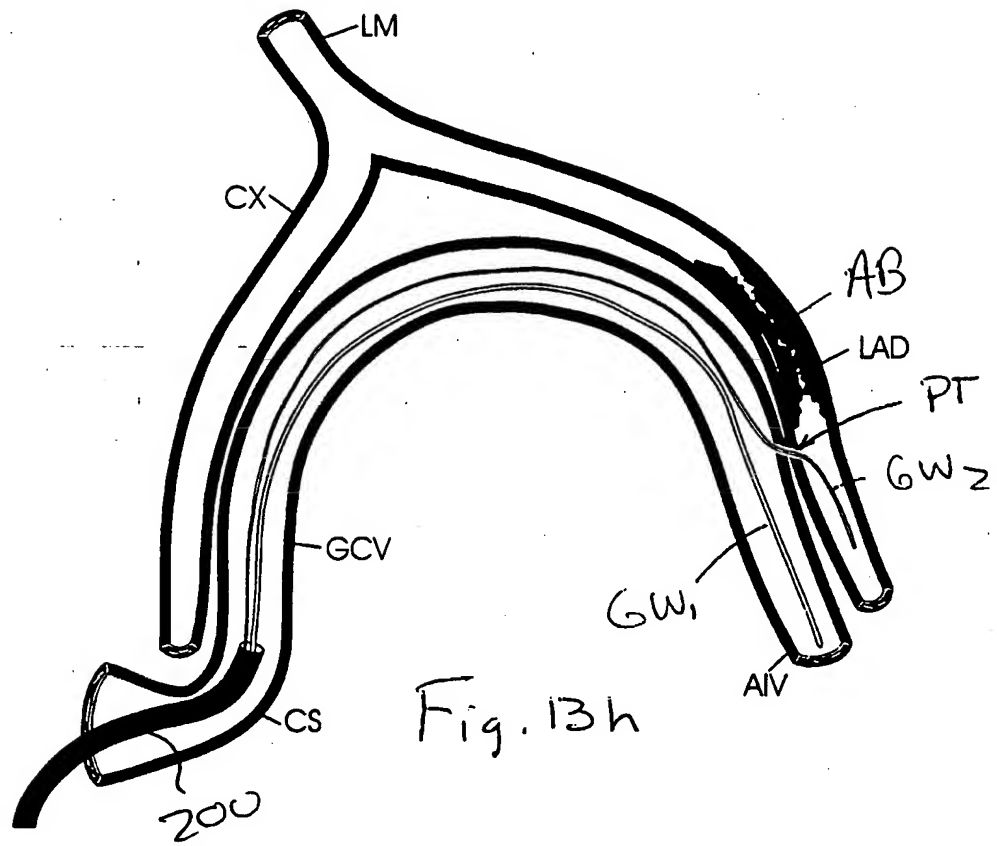


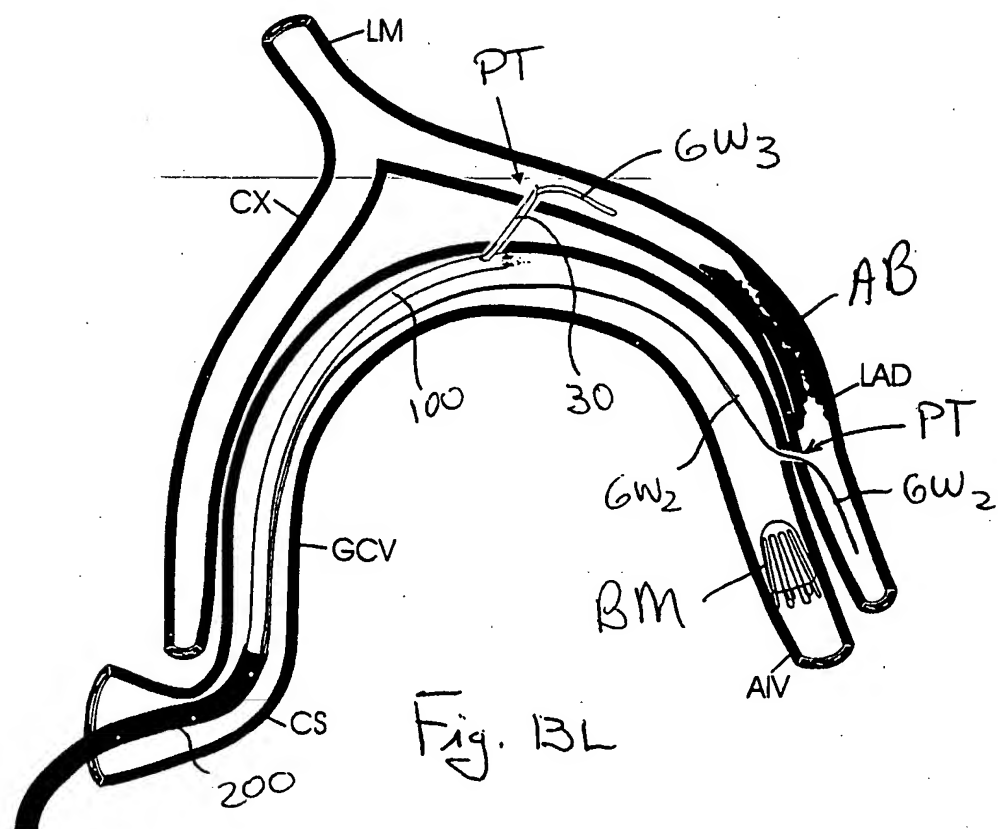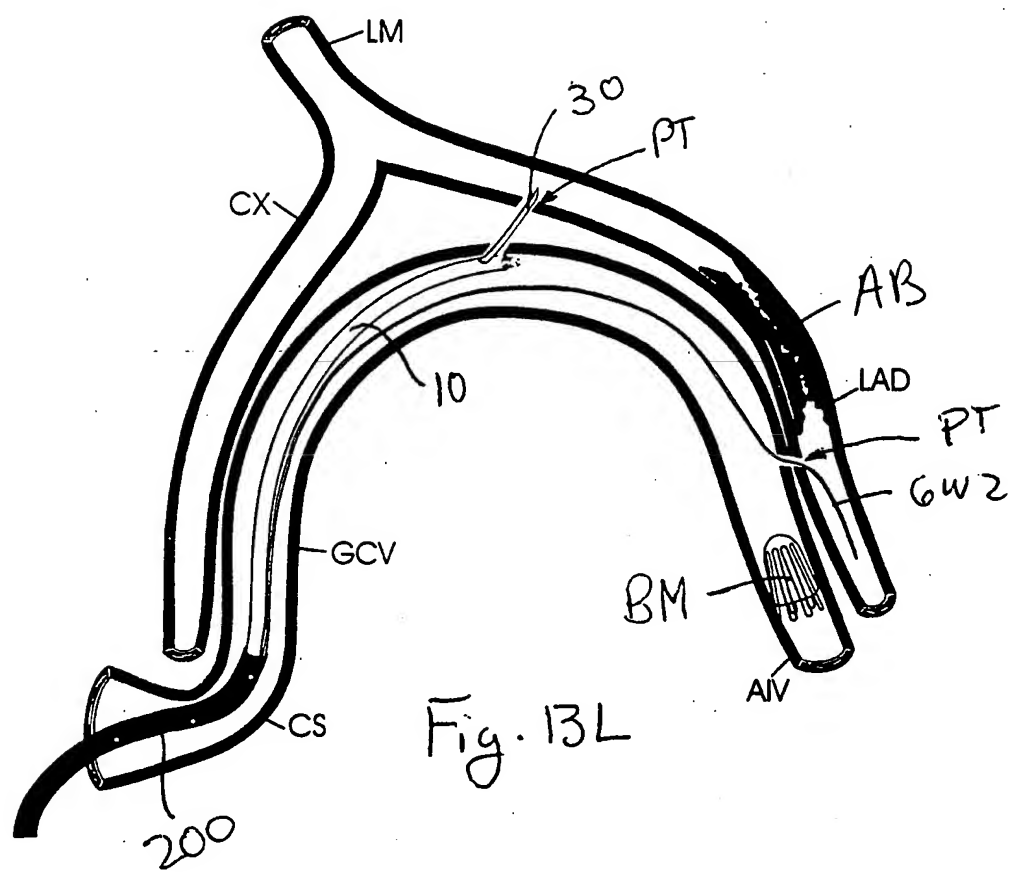






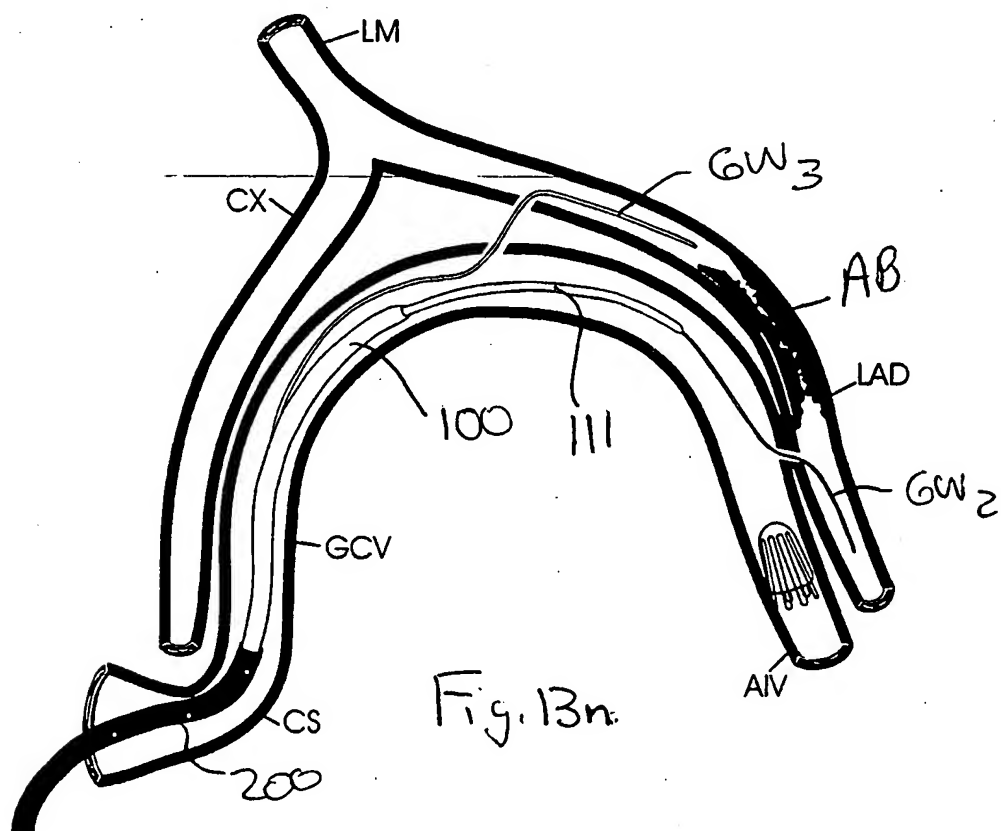
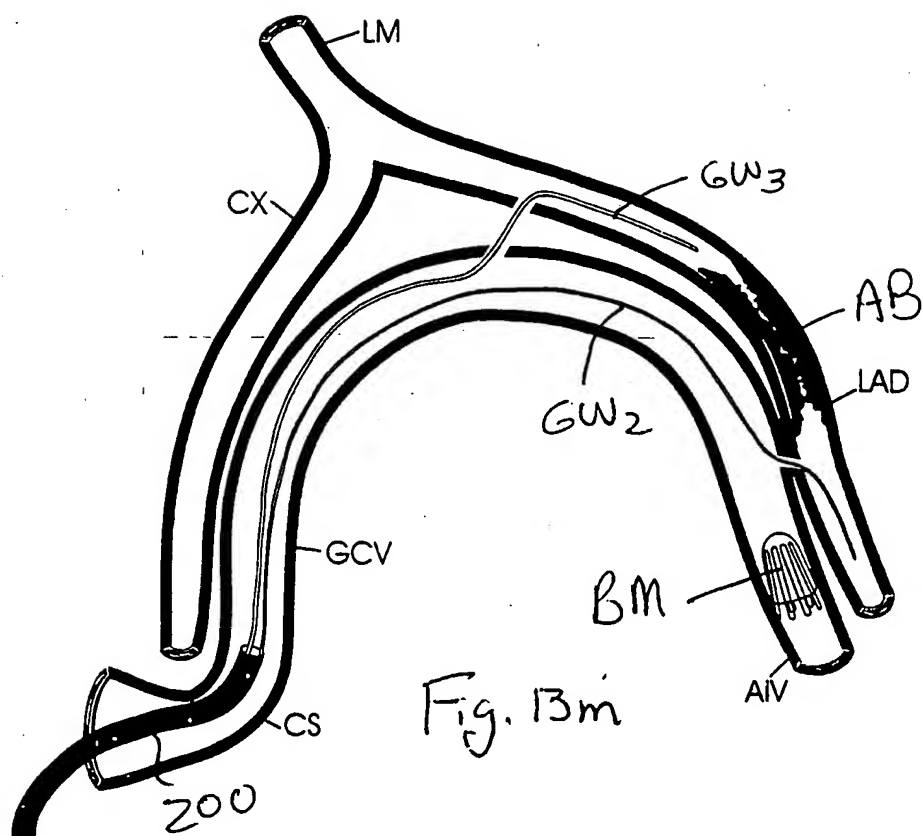


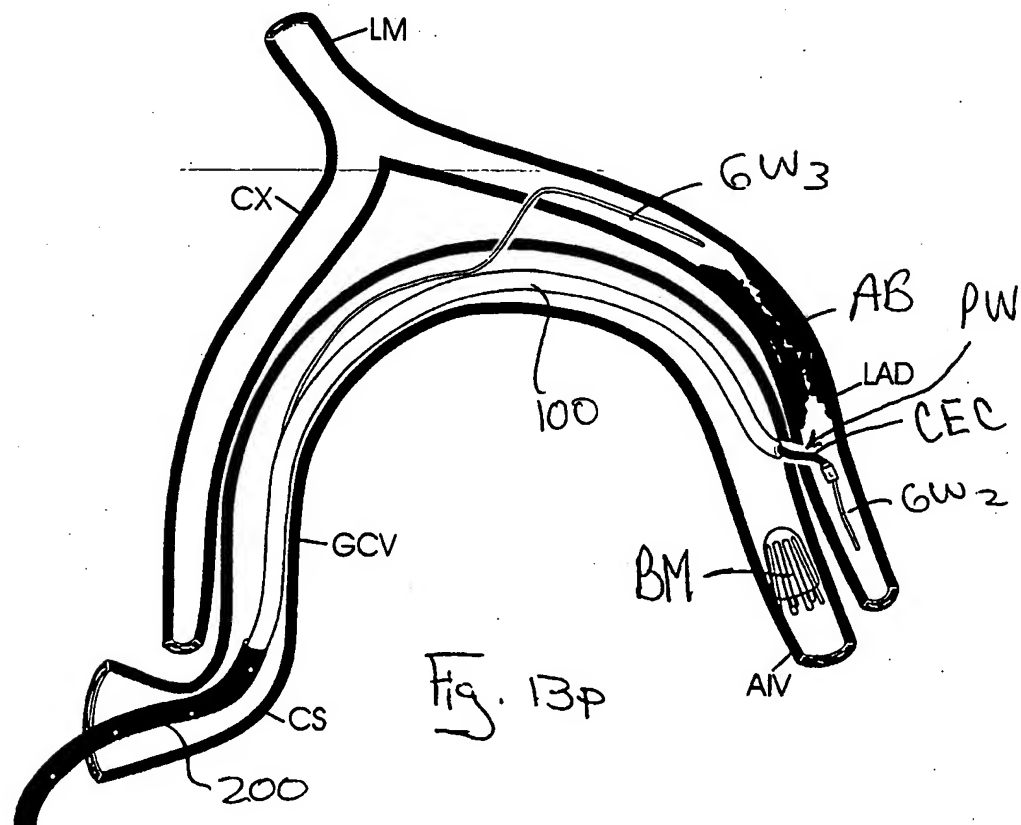
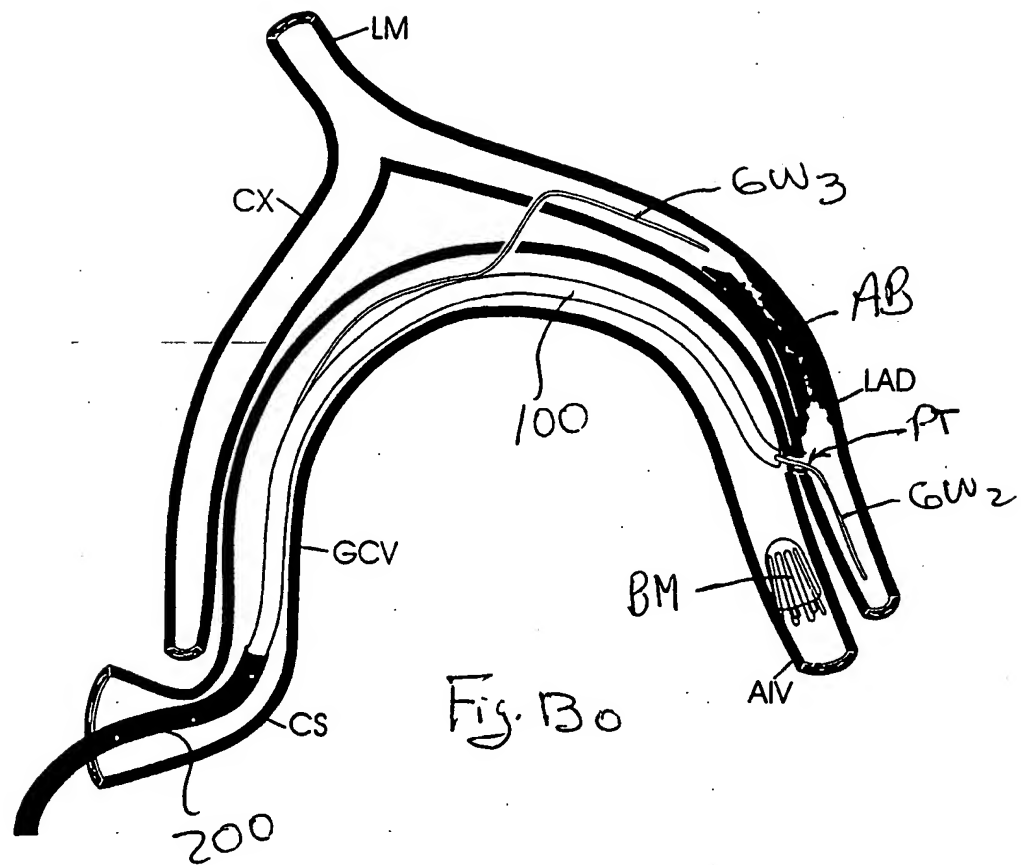


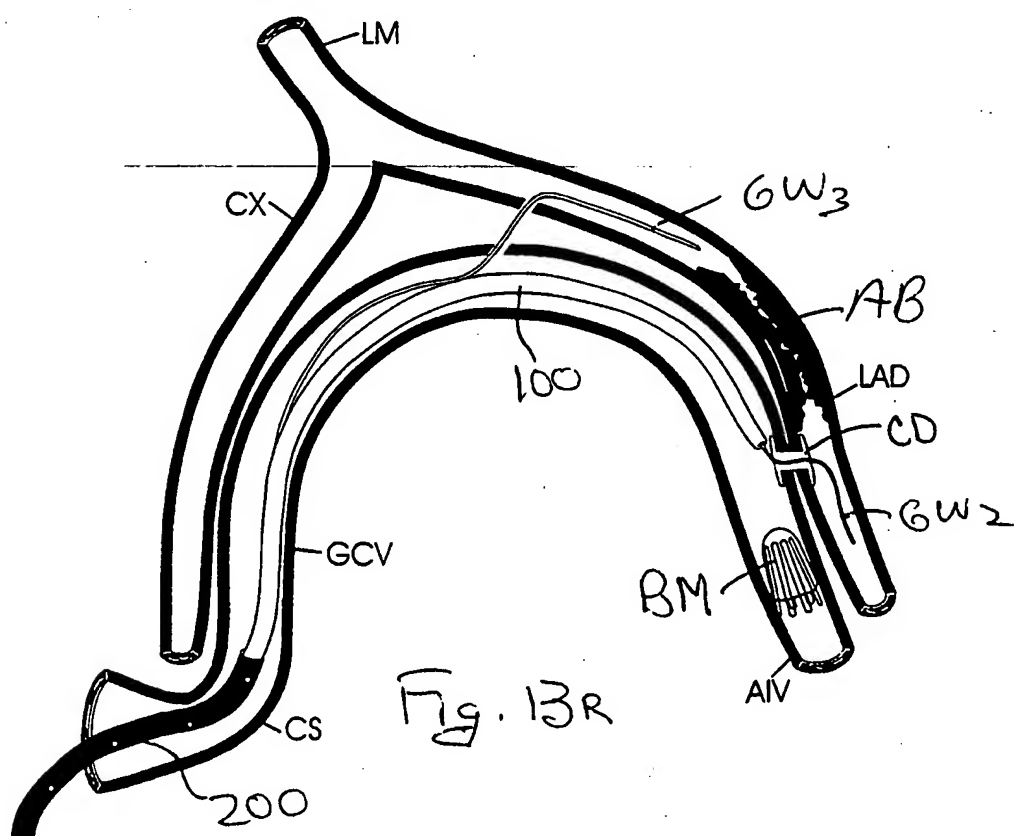
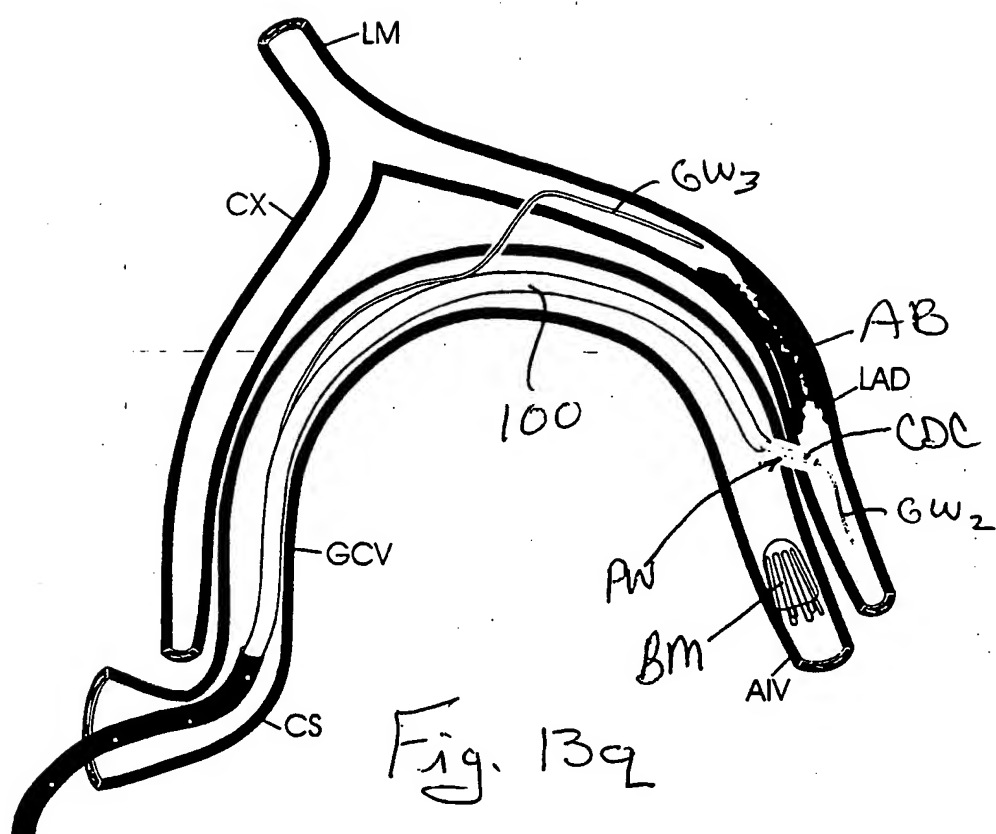


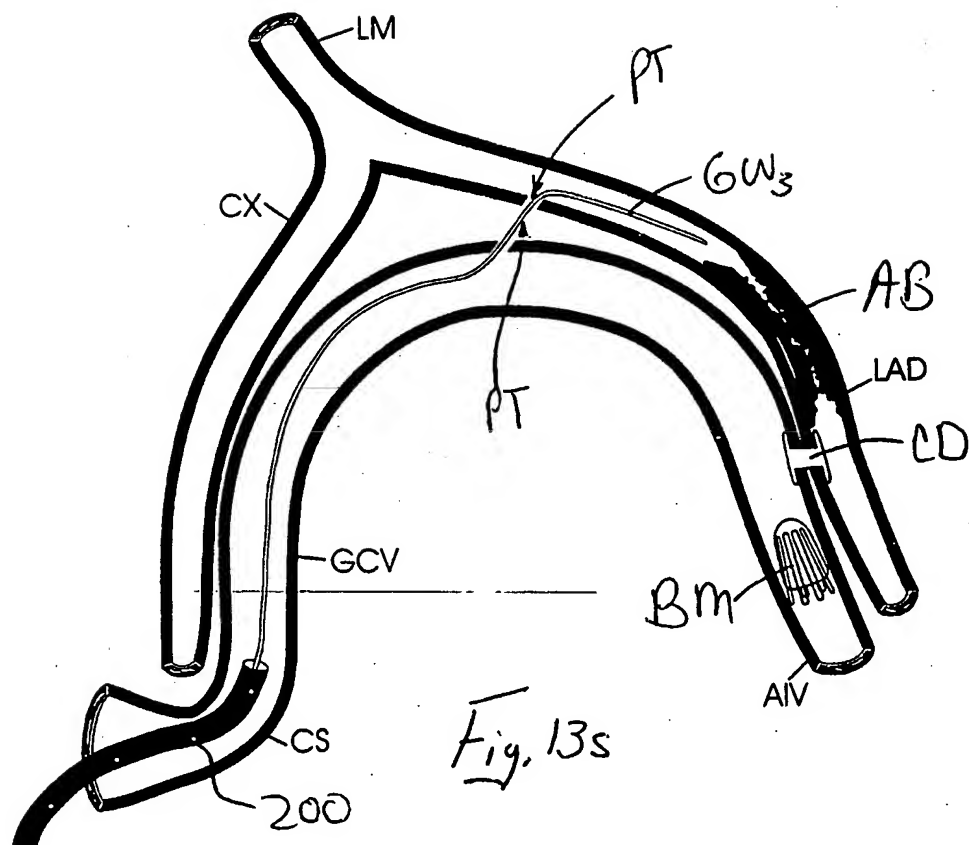

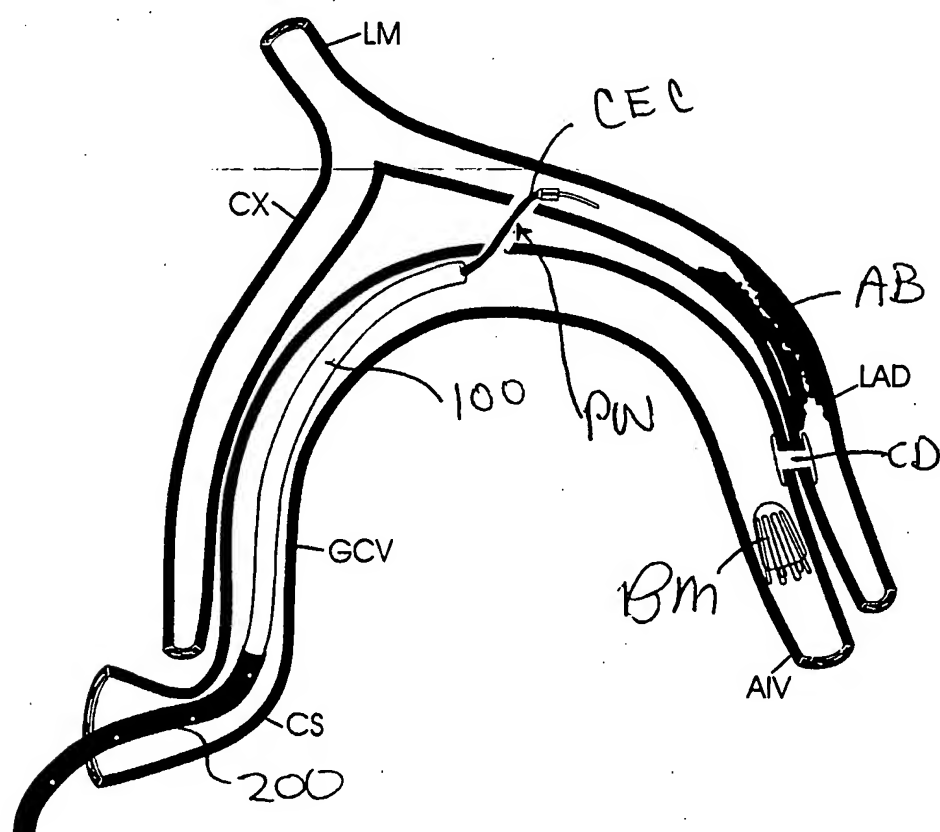
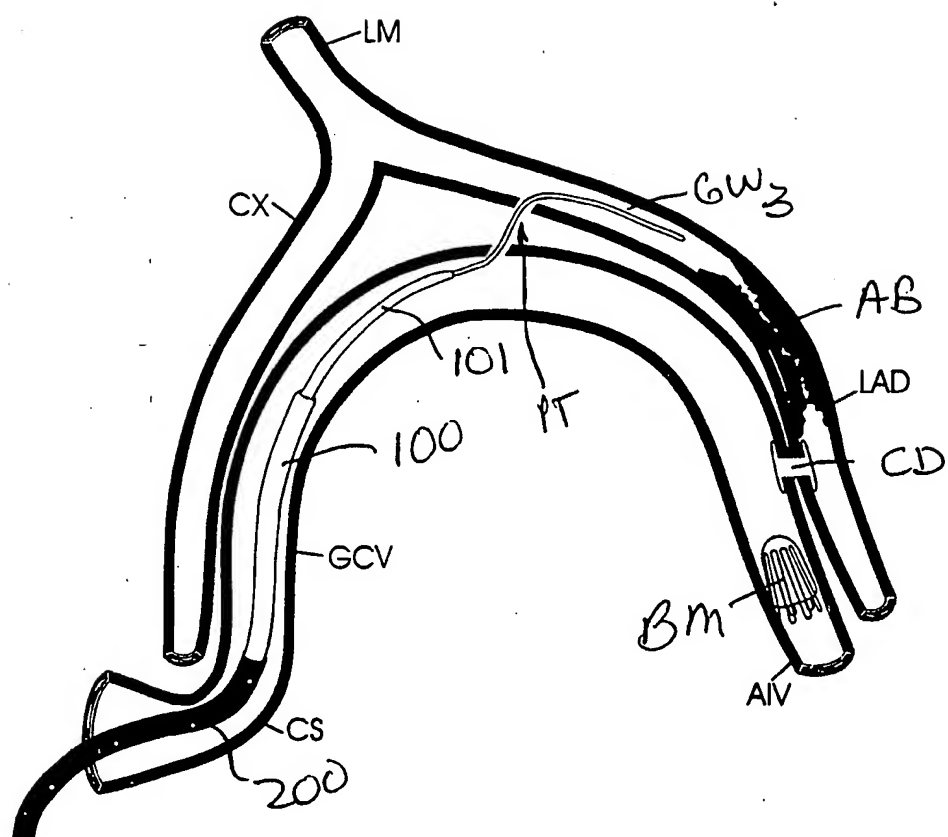


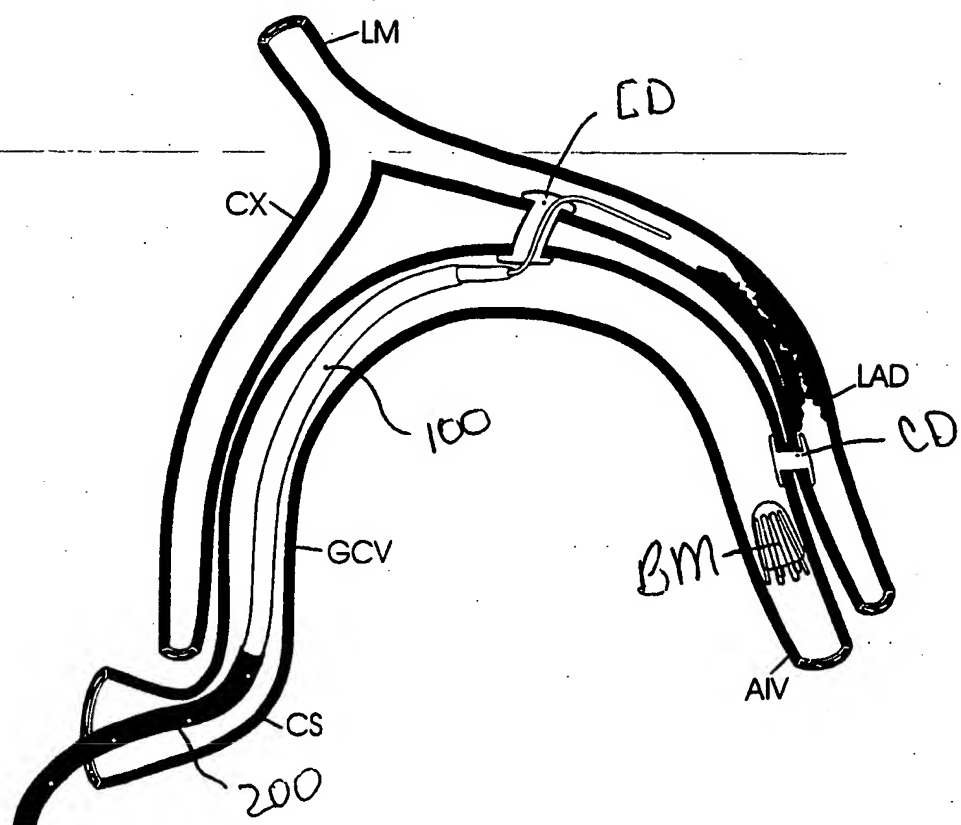
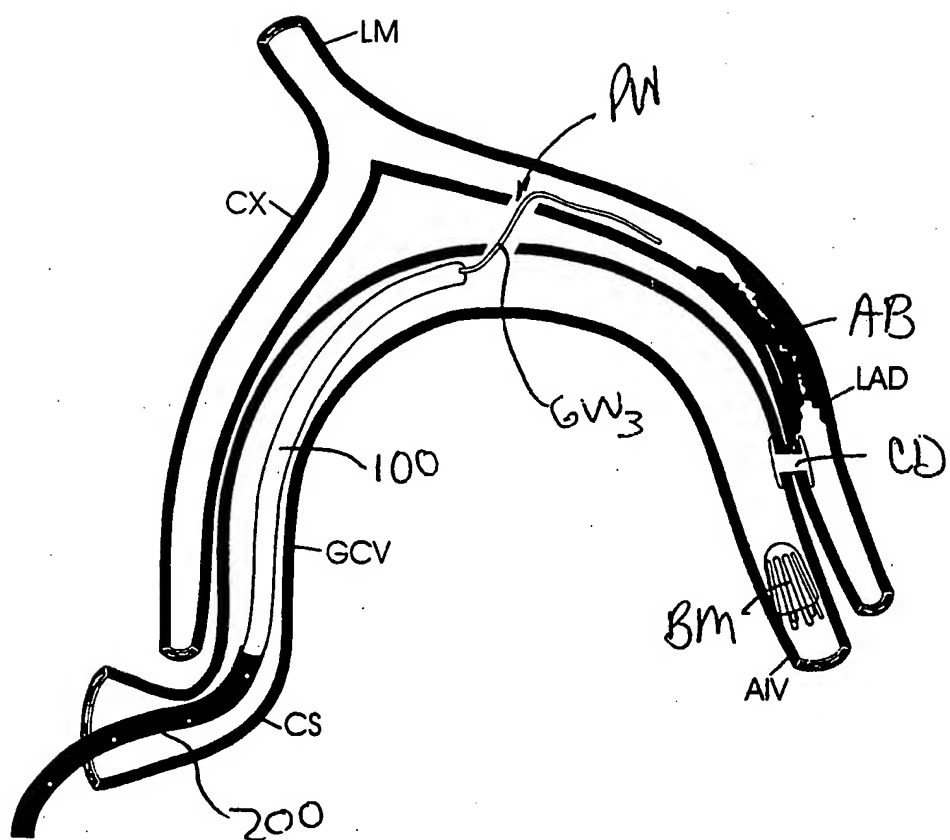


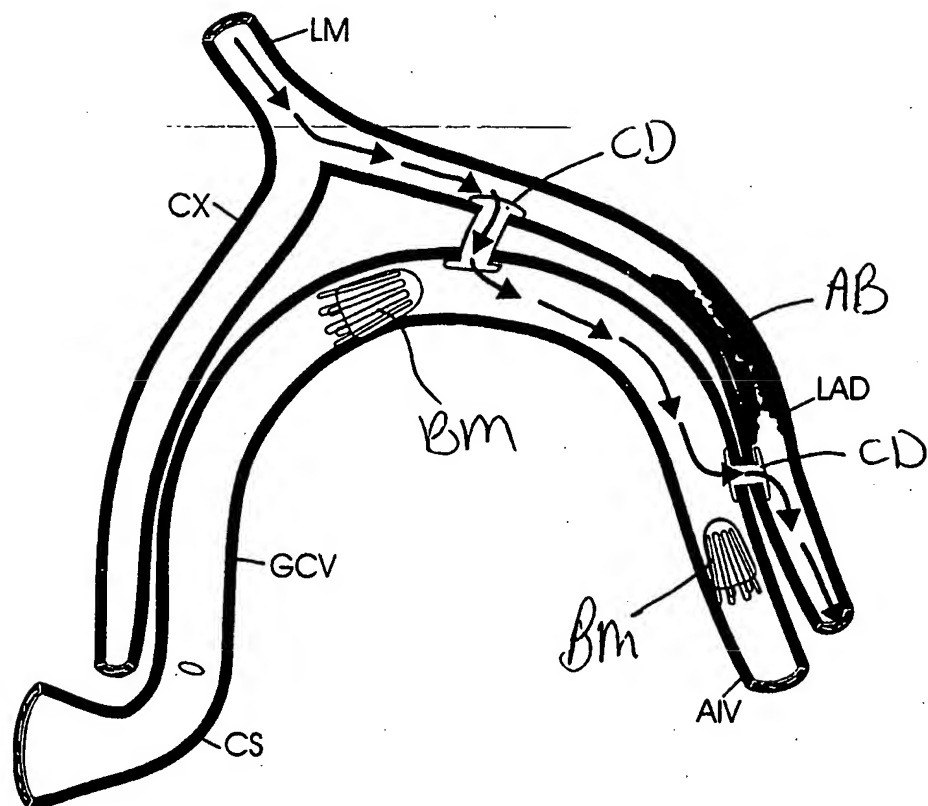
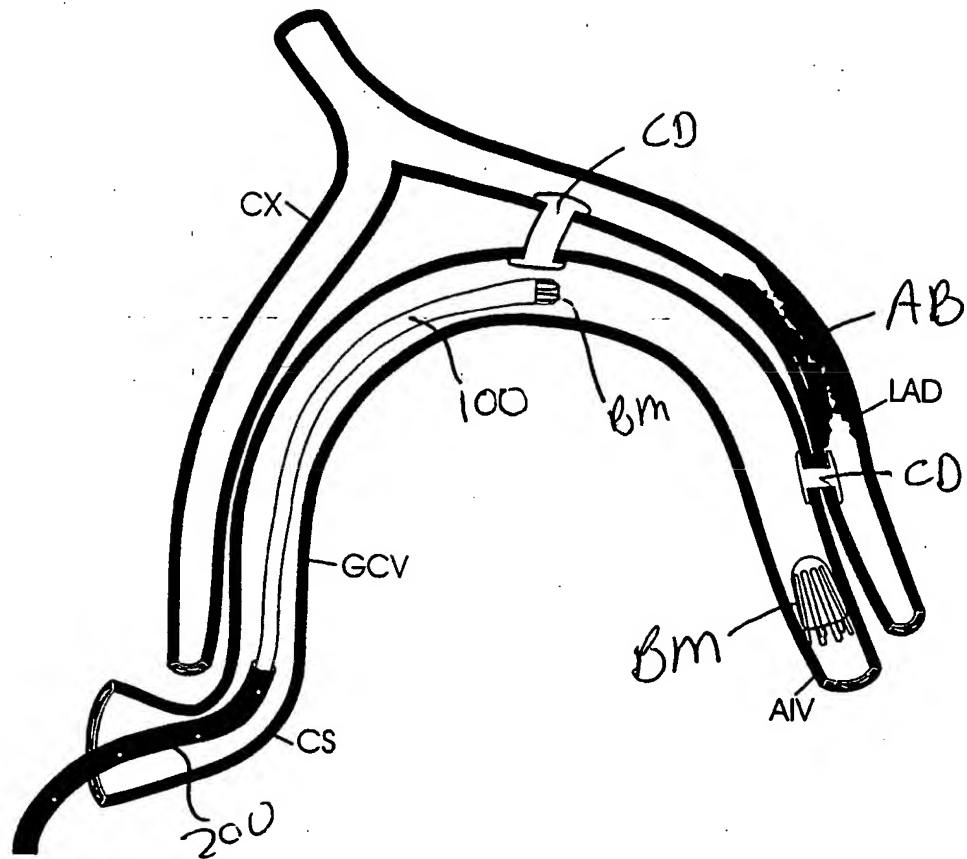


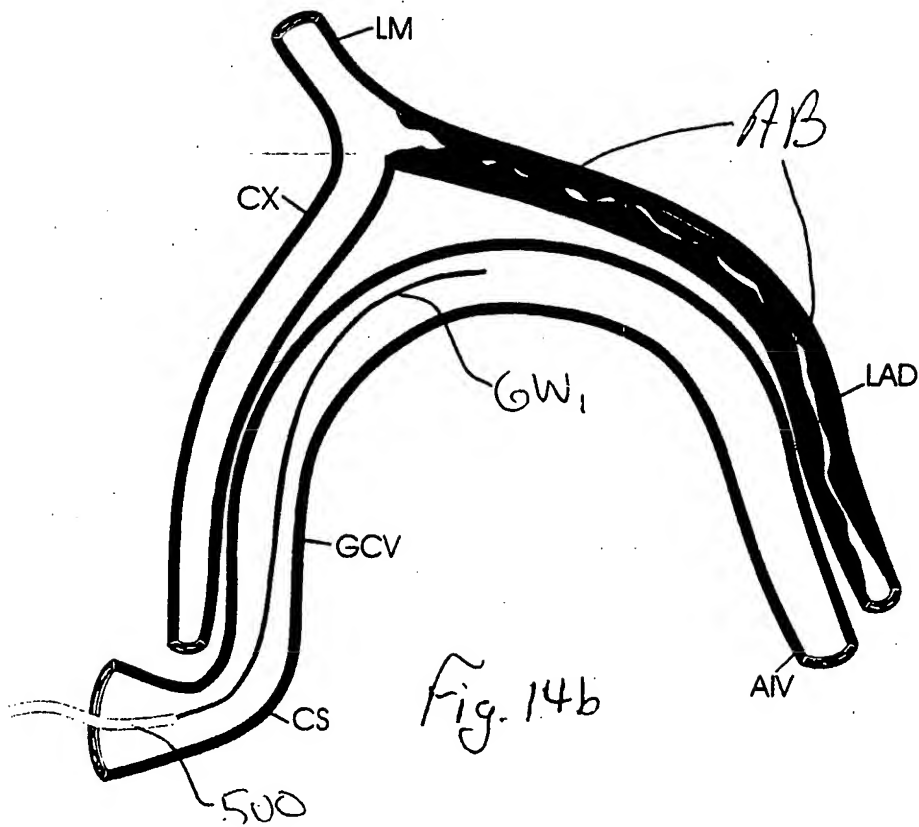
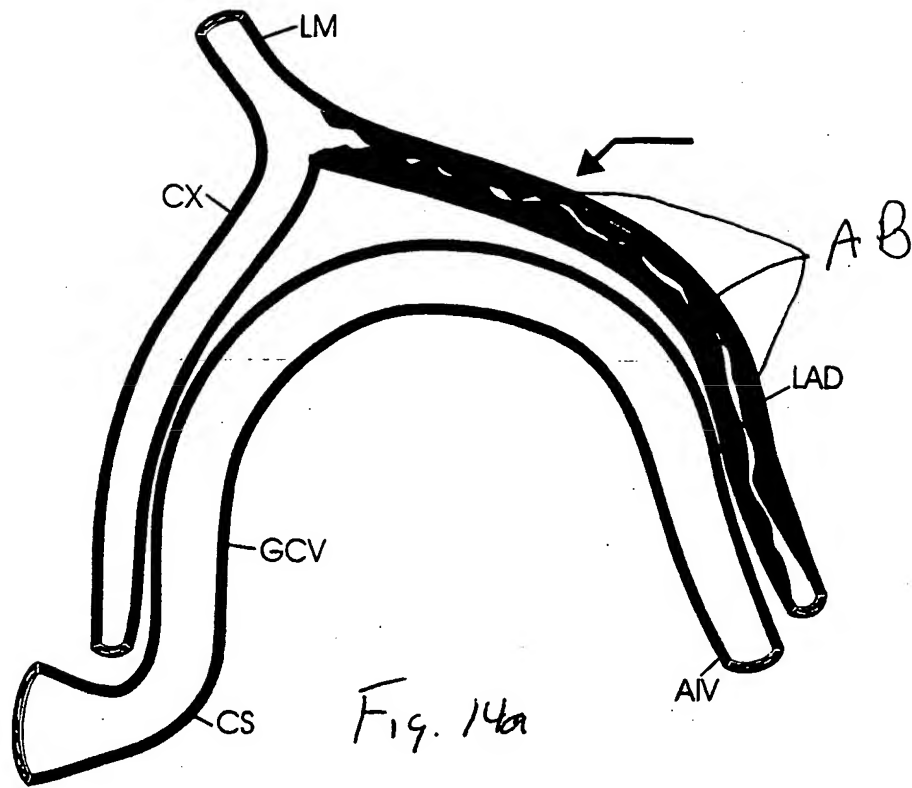




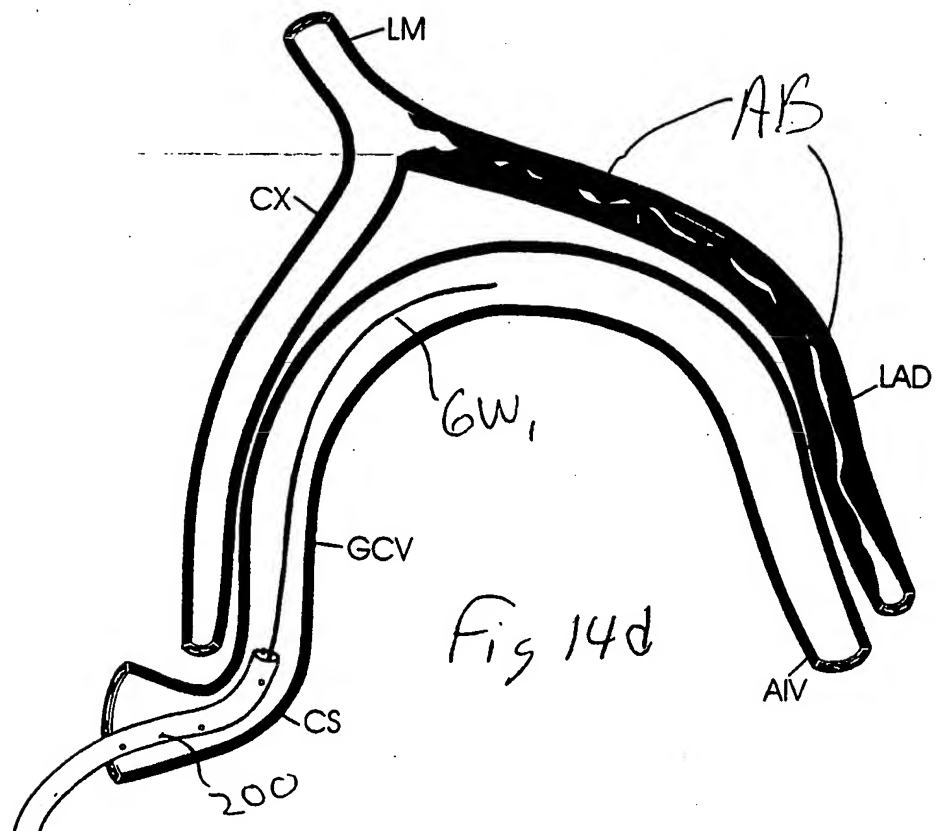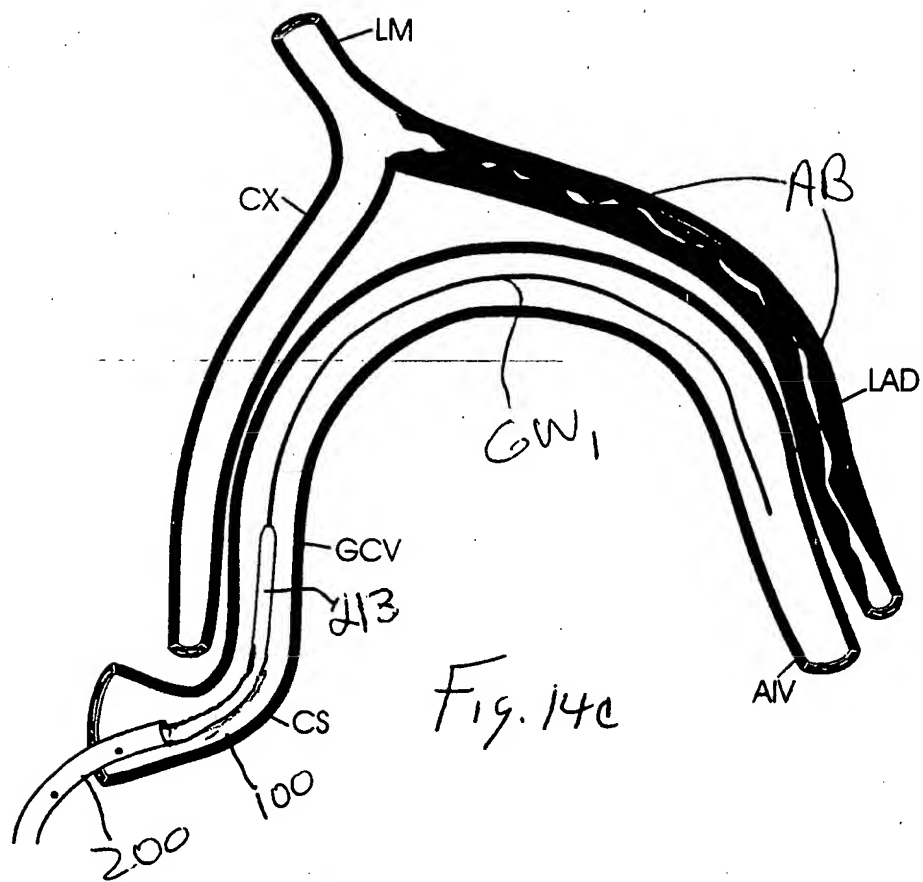

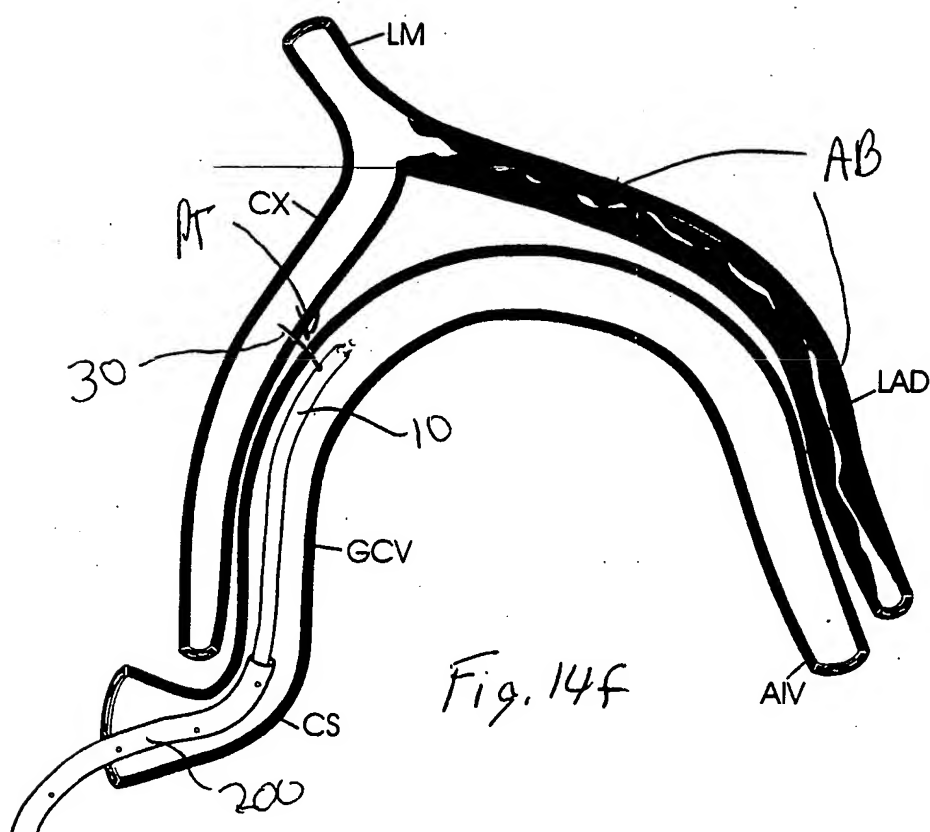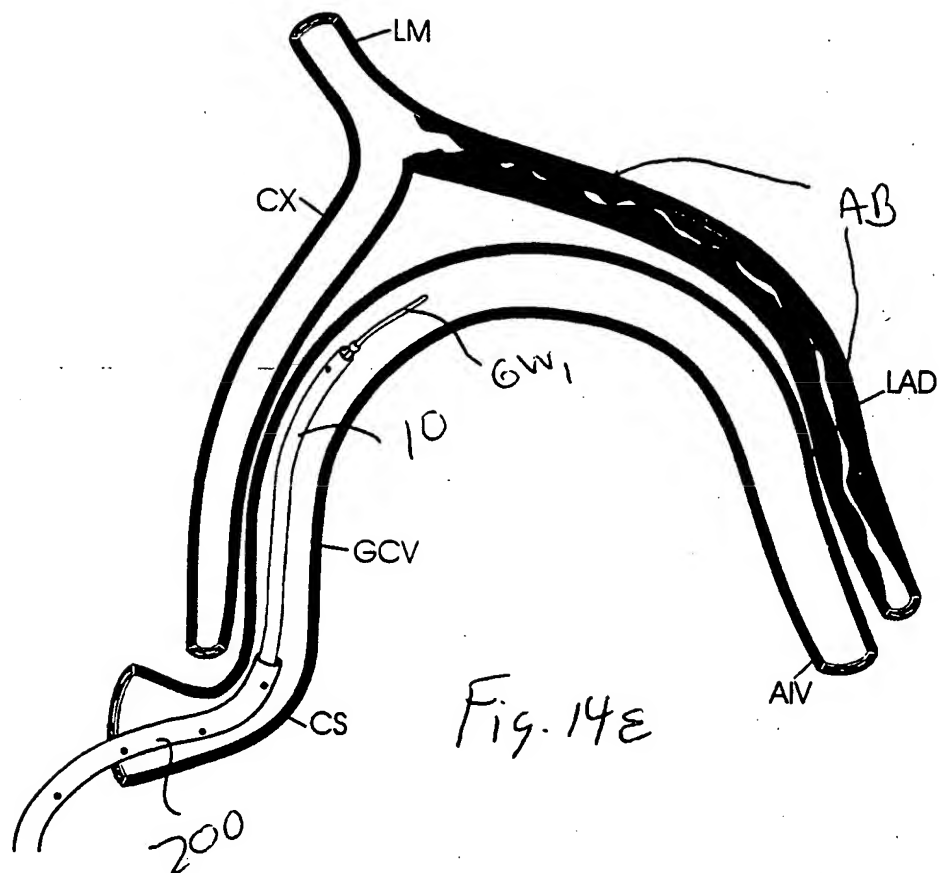

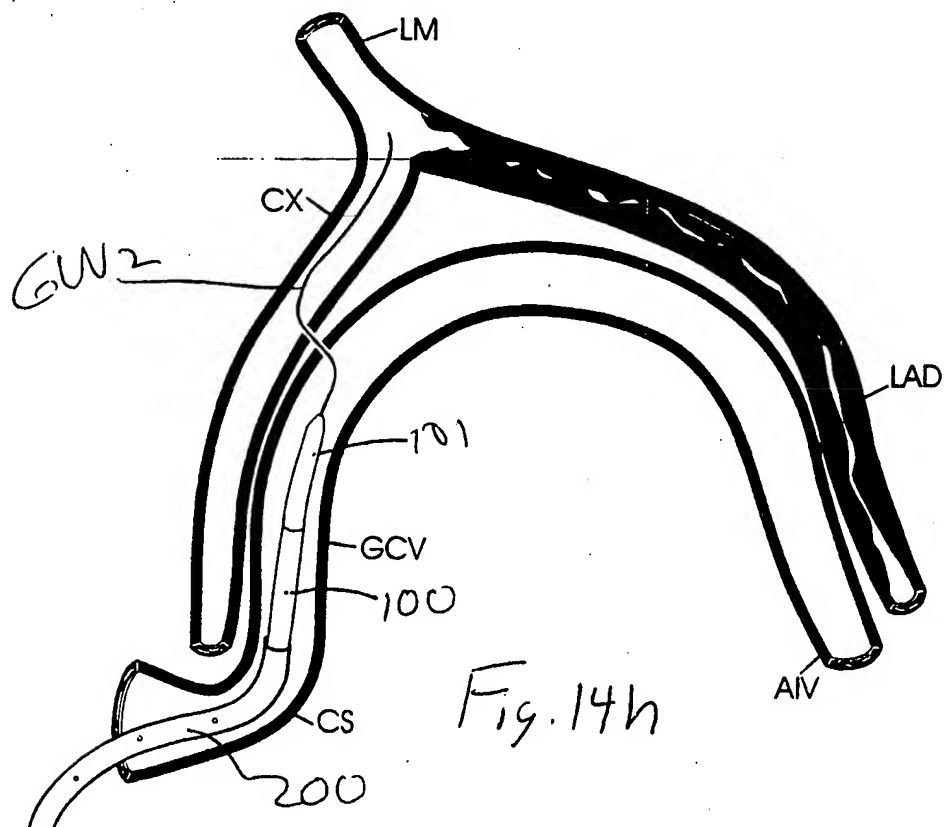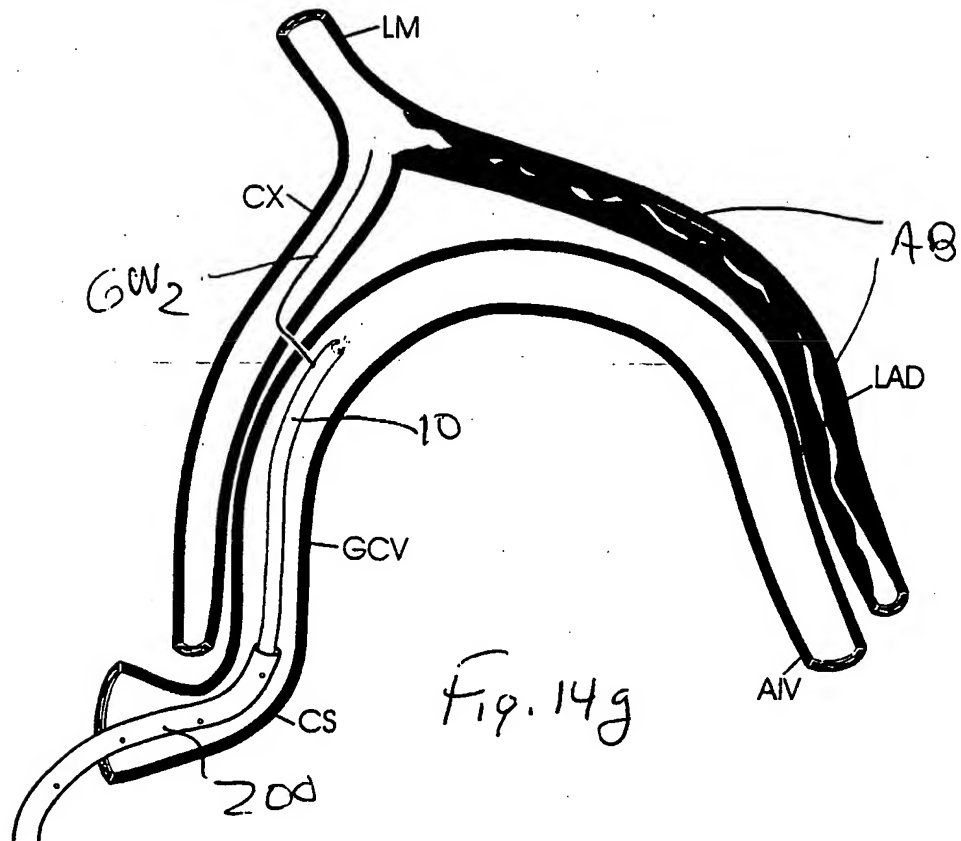

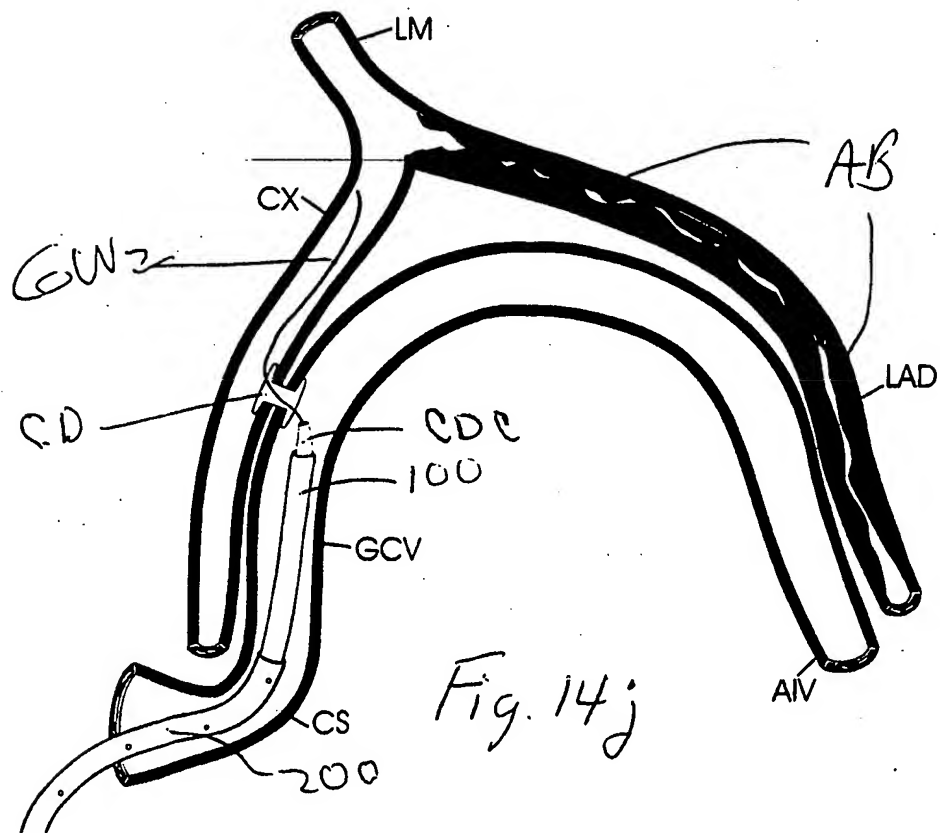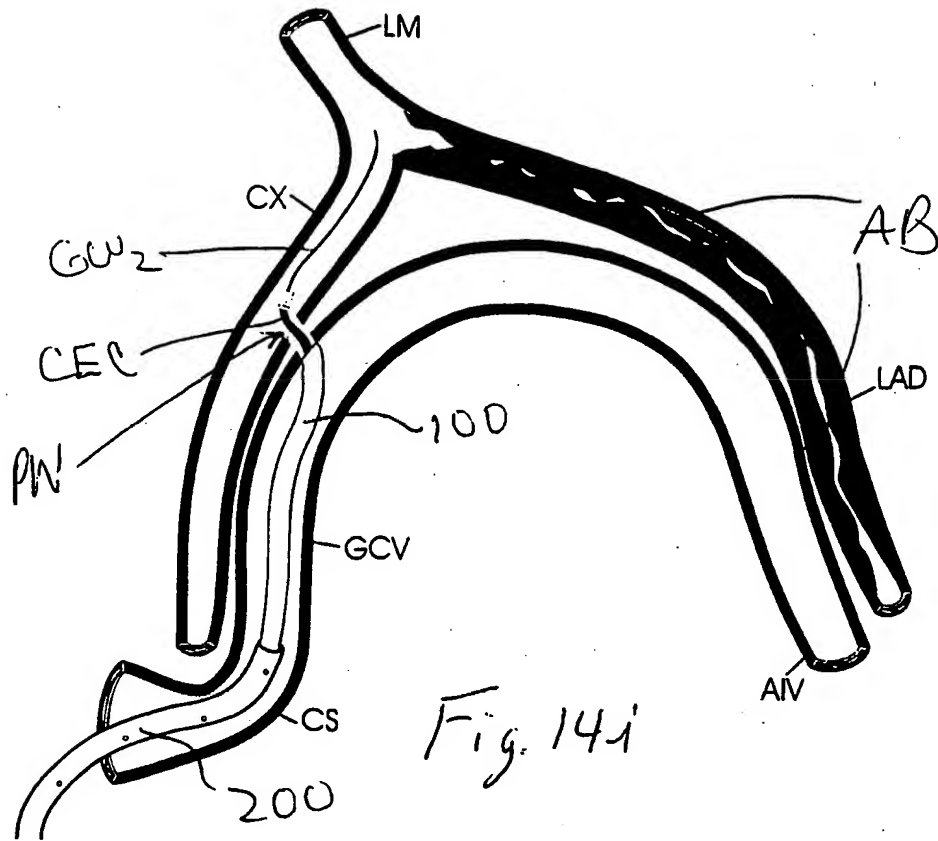



## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US99/07115

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(6) :A61B 17/22  
US CL :606/159, 170, 180

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 606/159, 170, 180

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,662,671 A (BARBUT et al.) 02 September 1997, Fig. 1, and col. 9 lines 9-68.	1-41
Y	US 5,681,336 A (CLEMENT et al.) 28 October 1997, Fig. 1, and col. 4 lines 1-68.	42-44
Y	US 5,863,362 A (ROWLAND et al.) 04 November 1997, Fig. 1, and col. 4 lines 30-68.	1-41
X, P	US 5,814,064 A (DANIEL et al.) 29 September 1998, Fig. 1, and col. 3-5.	1

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	


Date of the actual completion of the international search 18 MAY 1999	Date of mailing of the international search report 07 JUN 1999
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 308-2708	Authorized officer (JACKIE) TAN-UYEN THI HO Telephone No. (703) 306-3421



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification 6 : <b>A61B 17/22</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 99/49793</b>  (43) International Publication Date: 7 October 1999 (07.10.99)</p>
<p>(21) International Application Number: PCT/US99/07115 (22) International Filing Date: 31 March 1999 (31.03.99)  (30) Priority Data: 60/080,196 31 March 1998 (31.03.98) US  (71) Applicant: TRANSVASCULAR, INC. [US/US]; 1505-D Adams Drive, Menlo Park, CA 94025 (US).  (72) Inventors: FLAHERTY, J., Christopher; 11 Pine Lane, Los Altos, CA 94022 (US). WHITT, Jason, B.; 2554 Franklin Street, San Francisco, CA 94133 (US). MACAULAY, Patrick, E.; 1426 Sprucewood Drive, San Jose, CA 95118 (US). THOLFSEN, David, R.; 263 Crescent Avenue, San Francisco, CA 94110 (US). GARIBOTTO, John, T.; 828-A Cowper Street, Palo Alto, CA 94301 (US). EVARD, Phillip, C.; 3192 Bryant Street, Palo Alto, CA 94306 (US).  (74) Agent: BUYAN, Robert, D.; Stout, Uxa, Buyan &amp; Mullins, LLP, 4 Venture #300, Irvine, CA 92618 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> <i>With international search report.</i></p>

(54) Title: CATHETERS, SYSTEMS AND METHODS FOR PERCUTANEOUS IN SITU ARTERIO-VEINUS BYPASS

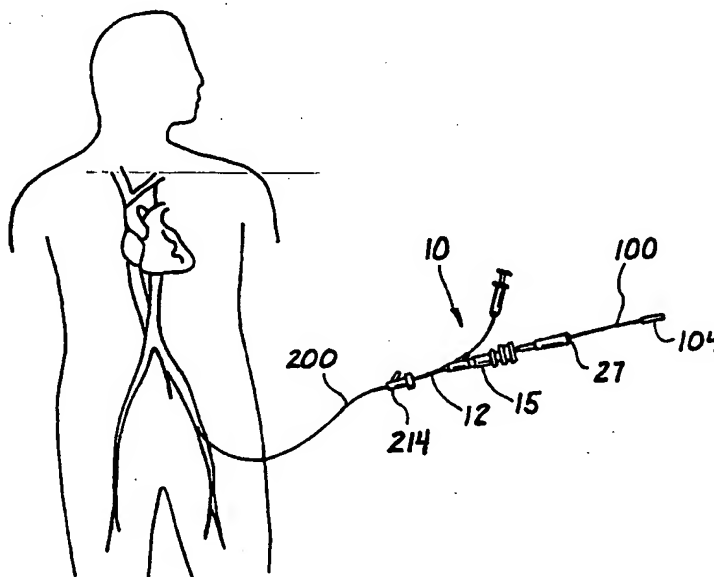

(57) Abstract

A system of catheter devices (10), and methods for forming channels or passageways between a luminal anatomical structure (e.g., a blood vessel), a target location (e.g., another blood vessel, an organ, a mass of tissue, etc.) for the purpose of rerouting blood flow or for delivering a substance or instrument, etc. to the target location.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		



0                                   **CATHETERS, SYSTEMS AND METHODS FOR**  
                                  **PERCUTANEOUS IN SITU ARTERIO-VEINOUS BYPASS**

**Related Application**

5                   This application claims priority to United States Provisional Patent  
Application Serial No. 60/080,196 entitled Methods and Apparatus for  
Percutaneous In Situ Coronary Artery Bypass, filed March 31, 1998.

**Field of the Invention**

10                  The present invention relates generally to medical devices and  
methods, and more particularly to catheter devices and methods that are  
useable to form channels (e.g., penetration tracts) between vessels such as  
arteries and veins as well as between vessels and other anatomical  
structures, in furtherance of a therapeutic purpose such as bypassing an  
arterial blockage, delivering therapeutic agents, or performing other  
15                interventional procedures.

**Background of the Invention**

20                Applicant has invented several new interventional procedures  
wherein channels (e.g., bloodflow passageway(s)) are formed between  
blood vessels, and between blood vessels and other target structures, using  
transluminally advanceable catheters. These new procedures include novel  
percutaneous, transluminal techniques for bypassing obstructions in  
coronary or peripheral arteries through the use of the adjacent vein(s) as *in*  
*situ* bypass conduit(s), and other means of revascularizing oxygen starved  
25                tissues or delivering therapeutic substances to vessels, tissue and other  
organs. These procedures are fully described in United States Patent  
5,830,222 and in United States Patent Applications 08/730,496, 09/048,147  
and 09/048,147. Some of these procedures may be performed by a venous

0 approach, such as vein-to-artery wherein a tissue penetrating catheter is  
inserted into a vein and the desired arterio-venous passageway is initially  
formed by passing a tissue penetrating element (e.g., a flow of energy or an  
elongate penetration member) from a catheter, through the wall of the vein  
in which the catheter is positioned, and into the lumen of an adjacent artery.  
5 Alternatively, some of these procedures may be performed by an artery-to-  
vein approach wherein the catheter is inserted into an artery and the desired  
arterio-venous passageway is initially formed by passing a tissue  
penetrating element (e.g., a flow of energy or elongate penetration member  
) from the catheter, through the wall of the artery in which the catheter is  
10 positioned, and into the lumen of an adjacent vein. Both approaches have  
been previously described in United States Patent Application 08/730,327.  
In addition, it may be advantageous to direct a penetrating element directly  
into other anatomical structures such as the myocardium, pericardium,  
chamber of the heart or other organs as described in United States Patent  
15 Application 09/048,147.

Different considerations and limitations may apply, depending upon  
which of these approaches (the "vein-to-artery approach, the "artery-to-vein"  
approach, or vessel to other anatomical structure) is being used or, more  
generally, the size and contour of the blood vessel lumen in which the  
20 operative catheters are to be placed, and the distance and/or angle between  
the vessels or other target. This is due in part to the fact that, in the heart  
as well as in other areas of the body, adjacent arteries and veins may be of  
significantly different diameter and significantly different dilatory capability.  
In addition, depending on the procedure to be performed, for example, such  
25 as the desired angle of channel creation between blood vessels, one  
approach may be preferred over the other, to promote, among other things,  
blood flow channels that encourage non-turbulent blood flow. Also, the  
consequences associated with causing temporary complete obstruction of

0 a vein may be significantly less than the consequences of causing temporary complete obstruction of an artery. Thus, it is desirable to devise tissue penetrating catheters of the above-described type that are sized, configured and/or equipped differently for use in blood vessels of different sizes, shapes and in connection with different types of pathology.

5 Moreover, it is desirable for tissue penetrating catheters of the above-described type to be constructed and equipped for precise aiming and control of the tissue penetrating element as the tissue penetrating element passes from the catheter, through at least the wall of the blood vessel in which the catheter is located, and to the target location. Such aiming and control of the tissue penetrating element ensures that it will create the  
10 desired penetration tract at the intended location with minimal or no damage to surrounding tissues or other structures.

#### Summary of the Invention

15 The present invention provides methods and apparatus for performing the percutaneous *in situ* coronary arterio-venous bypass procedures generally described in United States Patent No. 5,830,222 and United States Patent Application Serial No. 08/730,327, and other procedures requiring the use of accurately placed catheter elements.

#### A. Devices and System:

20 In accordance with the invention, there is provided a system for forming an initial penetration tract from the lumen of a blood vessel in which the catheter is positioned to a target location (such as another blood vessel, organ or myocardial tissue). This system generally comprises:

25 a) a coronary sinus guide catheter which is insertable within the venous system of the body and into the coronary sinus of the heart;

b) a tissue penetrating catheter which is advanceable to a position within a coronary vein, such tissue-penetrating

0 catheter comprising i) a flexible catheter body, ii) a tissue  
penetrating element (e.g., a needle member, electrode or flow  
of energy) which is passable from the catheter body, through  
the wall of the coronary vein in which the catheter body is  
positioned and into the lumen of an adjacent coronary artery,  
5 or other targeted structure, iii) an imaging lumen through  
which an imaging catheter (e.g., an intravascular ultrasound  
imaging (IVUS) catheter) may be passed; and,

c) a separate imaging catheter (e.g., an intravascular  
ultrasound (IVUS) catheter) that is advanceable through the  
10 imaging lumen of the tissue-penetrating catheter.

In addition to components a-c above, this catheter  
system may include a subselective sheath and introducer.  
The subselective sheath comprises a flexible tubular sheath  
that has a proximal end, a distal end and a lumen extending  
15 therethrough. The introducer is insertable through the lumen  
of the sheath and has a tapered, non-traumatizing distal  
portion that protrudes out of and beyond the distal end of the  
sheath as well as a guidewire lumen extending longitudinally  
therethrough. The tapered, non-traumatic distal portion of the  
20 introducer serves to dilate the blood vessel lumens or  
openings through which the sheath is inserted, thereby  
facilitating advancement and positioning of the sheath at a  
desired location within the body. After the sheath has been  
advanced to its desired position within the body, the  
25 introducer is extracted and various channel modifying  
catheters, connector delivery catheters and/or blocker delivery  
catheters may be advanced through the subselective sheath.

0           The coronary sinus guide catheter may incorporate a  
hemostatic valve to prevent backflow or leakage of blood from the  
proximal end thereof. Also, the coronary sinus guide catheter may  
include an introducer that is initially insertable through the guide  
5 catheter lumen. This introducer has a tapered, non-traumatizing distal  
portion that protrudes out of and beyond the distal end of the guide  
catheter, and a guidewire lumen extending longitudinally  
therethrough. The tapered, non-traumatizing distal portion of the  
introducer served to dilate the blood vessel lumens through which the  
10 guide catheter is inserted, thereby facilitating advancement and  
positioning of the coronary sinus guide catheter within the coronary  
venous sinus.

15           The tissue-penetrating catheter may incorporate one or more  
of the following elements to facilitate precise aiming and control of the  
tissue-penetration element and the formation of the passageway at  
the desired location:

20           a) Orientation Structure: An orientation structure may  
be positioned or formed on the distal end of the tissue  
penetrating catheter. This orientation structure has i) a hollow  
cavity or space formed therewithin in alignment with the  
catheter's imaging lumen and ii) a marker member positioned  
25 ~~in direct alignment with the opening in the catheter through~~  
which the tissue penetrating element emerges (or otherwise  
in some known spacial relationship to the path that will be  
followed by the tissue penetrating element as it passes from  
the tissue penetrating catheter). The separate imaging  
catheter may be advanced through the tissue penetrating  
catheter's imaging lumen and into the receiving space of the  
orientation structure. Thereafter, the imaging catheter is

0 useable to image the target location as well as the marker.  
The image of the marker provides a path indication that is  
indicative of the path that will be followed by the tissue  
penetrating element as it passes from the tissue penetrating  
catheter. The operator may then adjust the rotational  
5 orientation of the tissue penetrating catheter as necessary to  
cause the path indication to be aligned with or aimed at the  
target location, thereby indicating that when the tissue  
penetrating member is subsequently passed from the catheter  
body, it will advance into the target location and not to some  
10 other location. In this manner the imaging lumen, separate  
imaging catheter and orientation structure that are  
incorporated into the catheter system of this invention  
operate, in combination with each other, to facilitate precise  
rotational orientation of the tissue penetrating catheter and  
15 aiming of the tissue penetrating element *before the tissue  
penetrating element is advanced*, thereby ensuring that the  
tissue penetrating element will enter the desired target at the  
desired location. In particular, the orientation structure may  
comprise a plurality (e.g., three) of longitudinal struts, such  
20 longitudinal struts being disposed about a central space into  
~~which the IVUS catheter may be advanced.~~ One of such  
longitudinal struts may be aligned or specifically positioned in  
relation to the path that will be followed by the tissue  
penetrating element as it passes from the catheter, thereby  
25 providing on the display of the image received from the IVUS  
catheter, an artifact of other indication delineating the path or  
direction in which the tissue penetrating element will pass.  
The tissue-penetrating catheter may then be selectively

0 rotated to aim the tissue penetrating element into the lumen  
of the artery or other target anatomical structure into which it  
is intended to pass.

5 b) Soft Distal Tip Member: The catheter may  
incorporate a soft distal tip member that is formed or mounted  
on the distal end of the tissue-penetrating catheter (e.g., on  
the distal aspect of the above-described orientation structure).  
Such soft tip member is preferably formed of material which is  
soft enough to avoid trauma to the walls of the blood vessels  
10 through which the tissue-penetrating catheter is passed. A  
lumen may extend longitudinally through the soft tip member,  
to allow the operator to selectively advance the IVUS catheter  
or other device beyond the distal end of the tissue-penetrating  
catheter when it is desired to image blood vessels or other  
structures located distal to the then-current position of the  
15 tissue-penetrating catheter or perform other diagnostic  
functions with said IVUS catheter or other device.

20 c) Tissue Penetrating Member Stabilizer: In  
embodiments wherein the tissue penetrating element is a  
needle or other elongate member that is advanceable laterally  
from the catheter body, the tissue penetrating catheter may  
~~incorporate a stabilizer to prevent or deter the tissue~~  
penetrating member from rotating or deviating from a  
predetermined acceptable penetration zone (APZ) (hereinafter  
sometimes referred to as the "stabilizer"). As used herein, the  
25 term stabilizer shall mean any structural or functional  
attributes of the catheter and/or tissue penetrating member  
that deter or prevent the tissue penetrating member from  
rotating or otherwise deviating from its intended path of

0 advancement within a predetermined acceptable penetration  
zone (APZ). Examples of such structural and/or functional  
attributes include but are not limited to; curved distal housing  
5 formed to mirror the curve or form of the tissue penetrating  
element, engagement projections or elements for frictional  
engagement between the tissue penetrating member and the  
catheter body, bushings or narrowed/reduced diameter  
regions of the tissue penetration member lumen that serve to  
10 constrain the tissue penetrating member preventing side-to-  
side play or movement thereof, permanent magnets or  
electromagnets that create a magnetic field that prevents or  
deters lateral or rotational movement of the tissue penetrating  
member, etc. More specifically, for example, this stabilizer  
may comprise one or more of the following:

15 i) a curved needle housing which mates  
(i.e. has the same direction of curvature) with a  
preformed curvature formed in the needle. This  
mating of the curvatures of the needle and  
needle housing serves to deter unwanted  
rotation and resultant lateral deviation (flopping  
20 or wagging) of the portion of the needle which  
extends out of the catheter body;

25 ii) frictionally engaged surfaces formed  
on the needle member and surrounding  
catheter body (e.g., the wall of the lumen in  
which the needle member is disposed) to lock  
or deter rotation of the needle member relative  
to the catheter body;



0

iii) a steering mechanism for causing the distal portion of the catheter body to become curved in the direction in which the needle member is intended to advance so as to cause the preformed curve of the needle member to mate with the induced curvature of the surrounding catheter body; and,

5

10

15

20

25

iv) A laterally deployable needle guide member (e.g., a balloon or rigid annular structure) that is deployable from side of the tissue penetrating catheter adjacent to the outlet opening through which the tissue penetrating member passes to support and prevent unwanted lateral "play" or movement of the tissue penetrating member as it is advanced from the catheter. This outwardly deployable needle guide member is initially disposed in a "stowed" position wherein it does not protrude (or only minimally protrudes) from the catheter body, and is subsequently deployable to an "active" position wherein it protrudes laterally ~~from the catheter body, in the area of the~~ needle outlet aperture, to provide support and/or guidance for the advancing tissue penetrating element (e.g., needle member or flow of energy) as the tissue penetrating element passes from the catheter body to the target location. This laterally deployable needle guide member may comprise a tubular cuff that

0 has a lumen. The lumen of such tubular cuff  
may form, in combination with the catheter  
lumen in which the tissue penetrating element  
is positioned, a curvature that mates with or  
conforms to the preformed or intended  
5 curvature of the path of the tissue penetrating  
element as it passes from the catheter to the  
target location. In cases where the tissue  
penetrating element is a curved needle, the  
curvature of the laterally deployable needle  
10 guide member and/or catheter lumen may mate  
with or be the same as the curvature of the  
needle member.

d) Needle Member Locking Apparatus: The tissue  
penetrating catheter may incorporate an apparatus that  
15 prevents or deters rotation of the tissue penetration member  
within the catheter body *prior* to its advancement out of the  
catheter. Such rotational locking of the tissue penetrating  
member while it is in its retracted position serves i) to  
maintain the desired rotational orientation of the needle  
20 member and ii) to enhance or couple the transfer of torque  
from the proximal end of the catheter to the distal end of the  
needle, without the addition of mass or cross-sectional  
dimension to the catheter body.

e) Catheter Body Construction: The tissue  
25 penetrating device may comprise an elongate catheter body  
12 with proximal, medial and distal segments of varying  
flexibility and torque strength as described more fully in United  
States Patent Application 08/837,294, incorporated herein by

0 reference. Said catheter body may incorporate reinforcement  
members such as a reinforcement braid member which  
imparts structural integrity/stability as well as enhancing the  
ability of the catheter body to transmit torque along its length.  
In addition, it may be important for said reinforcement member  
5 to maintain the longitudinal integrity of said catheter body, and  
to minimize any variability of the catheter components during  
operation in the body.

**B. Methods:**

Further in accordance with the invention, there are provided methods  
10 for using the above-summarized catheter system to bypass an obstruction  
in a coronary artery by forming one or more arterio-venous passageways.  
Examples of these methods are the Percutaneous In Situ Coronary Artery  
Bypass (PICAB), as well as the Percutaneous Coronary Venous  
Arterialization (PICVA). It is understood that the same orientation steps and  
15 procedures may be used to access various targets and anatomical  
structures from placement of a tissue penetrating catheter within a blood  
vessel and orienting said catheter in accordance with this invention.

**i. Percutaneous In Situ Coronary Artery Bypass (PICAB)**

The PICAB procedure generally comprises the following steps:

- 20 1. Introduce a coronary sinus guide catheter into the coronary sinus;
2. Pass a tissue-penetrating catheter of the above-described type  
through the guide catheter and into the coronary vein;
3. Position an IVUS catheter or ultrasound transducer within the  
orientation structure of the tissue-penetrating catheter, and utilize the IVUS  
25 catheter or ultrasound transducer to view the artery into which the arterio-  
venous passageway is to extend as well as the marker that denotes the  
path that will be followed by the tissue penetrating member as it is advanced  
from the catheter body;

0                   4. Rotate or move the tissue-penetrating catheter, as necessary, to cause the needle path indicator generated by the marker to become aligned with the lumen of the artery; and,

5                   5. Pass the tissue penetrating element from the catheter, through the wall of the vein in which the catheter is positioned, and into the lumen of the artery, thereby forming an initial arterio-venous passageway distal to the arterial obstruction. In some embodiments, the tissue penetrating element has a lumen extending longitudinally therethrough for passage of a guidewire from vessel to vessel.

10                  6. Move the catheter to a second location and repeat steps 4-6 to form an initial arterio-venous passageway proximal to the arterial obstruction.

7. Enlarge the proximal and distal arterio-venous passageways, if necessary, to permit the desired volume of blood flow through such passageways.

15                  8. Place connector(s), stent(s), liner(s) or other stenting or connecting devices within the proximal and/or distal passageways, if necessary, to maintain the patency of the passageways; and,

20                  9. Optionally, if necessary, place one or more blocker(s) within the coronary vein, or otherwise fully or partially block blood flow through the coronary vein, at location(s) that urge arterial blood to flow from the artery, through the first passageway and into the vein, through a segment of the vein, through the second passageway, and back into the artery (downstream of the blockage), thereby restoring arterial blood flow to the ischemic myocardium.

25

0

**ii. Percutaneous Coronary Venous Arterialization (PICVA)**

Further, in accordance with the present invention, there is provided a method for Percutaneous In Situ Coronary Venous Arterialization (PICVA) procedure, using a catheter system of the foregoing character. This preferred PICVA procedure generally comprises the steps of:

5

1. Introduce a coronary sinus guide catheter into the coronary sinus;

2. Pass a tissue-penetrating catheter of the above-described type through the guide catheter and into the coronary vein;

10

3. Position an IVUS catheter or ultrasound transducer within the orientation structure of the tissue-penetrating catheter, and utilize the IVUS catheter or ultrasound transducer to view the artery into which the arterio-venous passageway is to extend as well as the marker that denotes the path that will be followed by the tissue penetrating member as it is advanced from the catheter body;

15

4. Rotate or move the tissue-penetrating catheter, as necessary, to cause the needle path indicator generated by the marker to become aligned with the lumen of the artery; and,

20

5. Pass the tissue penetrating element from the catheter, through the wall of the vein in which the catheter is positioned, and into the lumen of the artery, thereby forming an initial arterio-venous passageway distal to the arterial obstruction.

25

. In some embodiments, the tissue penetrating element has a lumen extending longitudinally therethrough for passage of a guidewire from vessel to vessel.

6. Enlarge the initial arterio-venous passageways, if necessary, to permit the desired volume of blood flow through such passageway.

- 0                   7.     Place connector(s), stent(s), liner(s) or other stenting or  
                    connecting devices within the arterio-venous passageway, if  
                    necessary, to maintain the patency of the passageway; and,  
                    8.     Optionally, if necessary, place one or more blocker(s) within  
5                   the coronary vein, or otherwise fully or partially block blood  
                    flow through the coronary vein, at location(s) that urge arterial  
                    blood to flow from the artery, through the arterio-venous  
                    passageway and into the vein, such that the arterial blood will  
                    flow through the vein in a direction opposite normal venous  
10                   flow, thereby retro-perfusing the ischemic myocardium by  
                    arterialization of the coronary vein.

Further aspects and advantages of the present invention will become  
apparent to those of skill in the art upon reading and understanding the  
detailed description of preferred embodiments set forth herebelow and the  
accompanying drawings.

15

#### **Brief Description of the Drawings**

Figure 1 is a schematic showing of a human being having a tissue-  
penetrating catheter system of the present invention percutaneously  
inserted via a femoral entry site.

20

Figure 1a is a broken, side elevational view of a first embodiment of  
a tissue-penetrating catheter of the present invention.

Figure 1b is an enlarged view of the distal end of the catheter of  
Figure 1b.

Figure 1b' is a broken, side view of the catheter body construction of  
the catheter shaft of a tissue penetrating catheter of the present invention.

25

Figure 1b'' is a detailed view of the braided construction of the  
catheter shaft of Figure 1b'.

Figure 1c is a cross sectional view through line 1c-1c of Figure 1a.

Figure 1d is a cross sectional view through line 1d-1d of Figure 1a.

0           Figure 1e is an enlarged, side elevational view of the needle housing/stabilizer assembly of the catheter of Figure 1a.

          Figure 1f is a cross sectional view through line 1f-1f of Figure 1e.

          Figure 1f' is a cross sectional view through line 1f'-1f' of Figure 1f.

5           Figure 2 is a representation of the intravascular ultrasound image that is obtained when the tissue-penetrating catheter of Figure 1a is positioned within a coronary vein and properly oriented/aimed such that deployment of its tissue penetrating member will form a penetration tract (i.e., a passageway) from the coronary vein to an adjacent coronary artery.

10           Figure 3 is a representation of the intravascular ultrasound image which is obtained when the tissue-penetrating catheter of Figure 1 a is positioned within coronary vein and *improperly* oriented/aimed such that deployment of its tissue penetrating member will *not* form a passageway from the coronary vein to the adjacent coronary artery.

15           Figure 4 is a side elevational view of a subselective sheath and accompanying introducer that are useable in combination with the tissue-penetrating catheter of the present invention.

          Figure 4 a is a side elevational view of a dilator that is insertable through and useable in conjunction with the subselective sheath of Figure 4.

20           Figure 5 is a partial longitudinal sectional view of the subselective sheath of Figure 4 having the dilator of Figure 4 a operatively inserted therein.

          Figure 5a is an enlarged, cross sectional view through line 5a-5a of Figure 5.

25           Figure 6 is an enlarged, longitudinal sectional view of the distal portion of the subselective sheath of Figure 4.

          Figure 7 is a side elevational view of the tissue puncturing needle member of the tissue-penetrating catheter of Figure 1 a.

0                Figures 8a is an enlarged, side elevational view of the distal end of the needle member of Figure 7.

              Figure 8b is an enlarged top view of the of the distal end of the needle member of Figure 7.

5                Figures 9 & 9a show the hand piece/needle controller and distal end, respectively, of tissue-penetrating catheter of Figure 1 a with its tissue penetrating needle member in its retracted position.

              Figures 10 & 10a show the handpiece/needle controller and distal end, respectively, of tissue-penetrating catheter of Figure 1 a with its tissue penetrating needle member in its fully advanced position.

10              Figure 10 d is a side elevational view of an optional rotation-inhibiting key insert and corresponding keyed needle member which may be incorporated into the tissue-penetrating catheters of the present invention to prevent the tissue-penetrating needle member from rotating relative to the body of the catheter.

15              Figure 10 d' is a cross sectional view through line 10 d'-10 d' of Figure 10 d.

              Figure 10 d" is a cross sectional view through line 10 d"-10 d" of Figure 10 d.

20              Figure 10 e is a side elevational view of an optional rotation-inhibiting oval insert and corresponding oval shaped needle member which may be incorporated into the tissue-penetrating catheters of the present invention to prevent the tissue-penetrating needle member from rotating relative to the body of the catheter.

25              Figure 10 e' is a cross sectional view through line 10 e'-10 e' of Figure 10 e.

              Figure 10 e" is a cross sectional view through line 10 e"-10 e" of Figure 10 e.



0           Figure 10 f is a partial longitudinal sectional view of a tissue-penetrating catheter device of the present invention incorporating an optional locking collar apparatus for preventing the tissue penetrating needle member from rotating relative to the catheter body when the needle member is in its retracted position.

5           Figure 10 f' is an enlarged view of region 10 f' of Figure 10 f.

          Figure 10 g is a side elevational view of a tissue-penetrating catheter of the present invention having a laterally deployable needle stabilizer disposed in its "stowed" position.

10           Figure 10 g' is a side elevational view of a tissue-penetrating catheter of the present invention having a laterally deployable needle stabilizer disposed in its "active" position.

          Figure 11 is a side elevational view of a coronary sinus guide catheter/introducer assembly of the present invention.

15           Figure 11a is a cross-sectional view through line 11a-11a of Figure 11.

          Figure 11b is an enlarged, longitudinal sectional view of the proximal end/hemostatic valve of the coronary sinus guide catheter shown in Figure 11.

20           Figure 11c is broken, side elevational view of the introducer of the coronary sinus guide catheter/introducer assembly.

25           ~~Figure 12 is an enlarged, cross-sectional view through a coronary artery and adjacent coronary vein, showing the typical difference in diameter of the artery and vein, and delineating a preferred Acceptable penetration zone (APZ) wherein the arterio-venous bloodflow passageways of the present invention are formed.~~

          Figures 13a-13x are schematic, step-by-step showings of a preferred method for performing a percutaneous, *in situ* coronary arterio-venous

0 bypass (PICAB) procedure to bypass a blockage in the proximal Left Anterior Descending coronary artery, using a vein-to-artery approach.

Figures 14 a-14m are schematic, step-by-step showings of a preferred method for performing a percutaneous coronary venous arterialization (PICVA) procedure to provide retrograde arterial bloodflow  
5 through a coronary vein.

### Detailed Description of Preferred Embodiments

The following detailed description, and the drawings to which it refers, are provided for the purpose of describing and illustrating certain preferred embodiments or examples of the invention only, and no attempt has been  
10 made to exhaustively describe all possible embodiments or examples of the invention. For example, the tissue penetrating catheter of this invention may be utilized in numerous locations in the body to reliably access organs, tissue or other structures to deliver therapeutic substances or procedures. Thus, the following detailed description and the accompanying drawings are  
15 not intended to limit, in any way, the scope of the claims recited in this patent application and any patent(s) issuing therefrom.

#### **A. The Catheter System:**

Referring generally to Figures 1-12, a presently preferred catheter system of the present invention generally comprises i) a tissue-penetrating catheter component 10 (Figures 1-3 and 7-10 a), ii) a subselective  
20 sheath/introducer component 100 (Figures 4-6) and iii) a coronary sinus guide catheter/introducer component 200 (Figures 11-11c). Each of these components is described in substantial detail herebelow. These components of the catheter system may be packaged together in a single kit, or may be provided in separate packages to permit the operator to mix  
25 and match component sizes in accordance with the particular anatomy of the patient, the size of the channels to be formed, the types of connectors and/or stents and/or blockers to be used, etc.

0           **I.    The Tissue-Penetrating Catheter Component of the Catheter System:**

Referring to Figures 1-3 and 7-10 there is shown a tissue-penetrating catheter device 10 which is insertable into the vasculature of a mammalian patient and useable to form passageways (e.g., puncture tracts) between the blood vessel in which the distal end of the catheter device 10 is situated and another blood vessel or other anatomical structure. This catheter device 10 generally comprises an elongate, flexible catheter body 12 having a proximal portion 12<sub>p</sub> of a first diameter D<sub>1</sub> and a distal portion 12<sub>d</sub> of a second diameter D<sub>2</sub> which is smaller than the first diameter D<sub>1</sub>. The catheter body 12 has two (2) lumens 14, 16 which extend longitudinally therethrough. The first lumen 14 is sized and configured to permit a standard commercially available IVUS catheter (e.g., those available from Endosonics of Rancho Cordova, CA; CVIS of Natick, MA or Hewlett-Packard of Andover, MA) to be inserted therethrough and slidably disposed therewith. The second lumen 16 is sized and configured to house a tissue penetrating needle member 30 (see Figures 7, 9 and 10) which is alternately moveable between i) a retracted position (Figures 9-9a) wherein the distal end DE of the needle member 30 is contained within the catheter body 12, and ii) an extended position (Figures 10-10a) wherein the needle member 30 is advanced out of the catheter body 12 so as to penetrate through the walls of the blood vessels and through any intervening tissue located between the blood vessels.

15           **a. Orientation Structure:**

20           An orientation structure 36 and tip member 38 are formed integrally with or mounted on the distal end of the catheter body 12, as shown in  
25           Figures 1b, 9a and 10a. The orientation cage 36 comprises first 40, second 42 and third 44 strut members which extend longitudinally between the distal end of the catheter body 12 and the proximal end of the distal tip

0 member 38. The first strut member 40 is in direct longitudinal alignment with  
a needle outlet opening 46 formed in the side of the catheter body 12  
through which the tissue penetrating needle member 30 is advanced. The  
second and third strut members 42, 44 are located at equally spaced  
5 distances from the first strut member 40, while the distance between the  
second and third strut members 42, 44 is less than the distance between  
either of those second and third strut members 42, 44 and the first strut  
member 40. Such disparate (e.g., unequal) radial spacing of these strut  
members 40, 44 and 46 allows the operator to easily identify and distinguish  
10 the first strut member 40 from the other two strut members 42, 44 by way of  
the image received from an IVUS catheter positioned within the orientation  
structure 36. Thus, in this manner, the operator may selectively rotate the  
catheter body 12 until the first strut member 40 is directly aligned or  
juxtapositioned with the target blood vessel into which the needle member  
30 is to be advanced. An illustration of this technique is shown in Figures  
15 2 and 3. Figure 2 shows the IVUS image which is obtained when the tissue-  
penetrating catheter 10 is properly rotated such that the first strut member  
40 is aligned with the target artery A and the needle member 30 will  
advance into such target artery A. Figure 3 shows another situation where  
the tissue-penetrating catheter 10 is not properly rotated, the first strut  
20 member 40 is not aligned with the target artery A and the needle member  
30, if advanced, would not enter the target artery A.

It will be appreciated that the disparate distancing of the strut  
members 40, 42, 44 is only one possible way of rendering the first strut  
member 40 distinguishable from the other two strut members 42, 44.  
25 Alternatively, the size or configuration of the first strut member could be  
different so as to produce a distinguishable ultrasound image or the material  
or surface characteristics of the first strut member 40 could be made  
different from the other two strut members 42, 44 such that the first strut

0 member 40 would reflect more or less ultrasound than the other two strut  
members 42, 44 thus producing an ultrasound image which is  
distinguishable from the images produced by the other two strut members  
42, 44. It will also be appreciated that only one strut member may be  
5 required to provide a distinguishable element to aid catheter orientation, or  
alternatively two strut members may be positioned to delineate a zone within  
which the tissue penetrating member may be deployed, or other procedure  
conducted.

**b. Distal Tip Member:**

10 The distal tip member 38 is preferably of blunt tipped configuration  
and is formed of smooth soft material (e.g., PEBAX having a durometer  
hardness of 35D) so as to minimize trauma to the vasculature as the tissue-  
penetrating catheter device 10 is advanced or otherwise manipulated about.  
A hollow lumen 39 may extend longitudinally through the tip member 38, in  
15 alignment with the first lumen 14 of the catheter body 12, such that an IVUS  
catheter or other device such as a guidewire may be advanced from the first  
lumen 14, through the orientation structure 36, through the distal tip lumen  
38 and distally beyond the catheter device 10. This permits the operator to  
use the IVUS catheter to explore areas which are ahead of the distal end of  
the tissue-penetrating catheter without having to advance the tissue-  
20 penetrating catheter from its then-present position. It also permits the  
catheter device 10 to be introduced to the vasculature in the preferred "over  
the wire" manner.

**c. Tissue Penetrating Needle Member:**

25 The tissue penetrating element of the tissue penetrating catheter may  
comprise a sharp tipped needle 30 as shown in Figures 7, 8a and 8b. This  
needle 30 includes a proximal shaft 30p formed of stainless steel  
hypotubing and a resilient, curved distal portion 30d formed of a resilient  
material or, more preferably, a material such as NiTi alloy. Preferably a

0 lumen 31 extends longitudinally through the proximal shaft 30p and the curved distal portion 30d.

The particular radius of curvature of the curved distal portion 30d may be an important factor in determining the trajectory and path of the needle tip as it advances and the point at which the needle tip will stop when in its  
5 fully advanced position.

The distal tip of the needle member 30 is preferably sharpened so as to easily penetrate through the walls of the blood vessels and any intervening tissue located therebetween. One preferred needle tip configuration is the lancet type bevel 36 shown in Figures 8a and 8b. This  
10 lancet type bevel comprises a first radial surface 36a and a second radial surface 36b. Such lancet type tip 36 provides excellent tissue-penetrability and retains its sharpness after multiple retractions into/advancements from the catheter. In practice it may be important for the material surrounding the lumen of the needle, particularly at the distal tip of the needle, and  
15 particularly the heel of the needle lumen 36c, to be smooth and free of rough edges or burrs. This allows smooth passage of devices, such as guidewires, through the needle lumen.

In many applications, the controllability and aiming of the needle member 30 may be enhanced by constraining the needle member 30 such that it will remain in a preferred plane or acceptable penetration zone APZ  
20 as shown in Figure 12, as it is advanced from the catheter. In embodiments where a curved needle member 30 is advanced out of a side aperture in the catheter ( e.g., the embodiment shown in Figure 10a), any rotation of the needle member 30 prior to, during or after advancement of the needle  
25 member 30 can cause the distal end of the curved needle member to deviate from or move out of the intended plane or acceptable penetration zone APZ. In this regard, the potential for such unwanted lateral movement of the distal end of the needle member 30 may be prevented or substantially

0 limited by providing a stabilizer to prevent or substantially limit the amount  
of rotation that the needle member 30 may undergo relative to the catheter  
body 12 or to otherwise prevent or deter the needle member from deviating  
5 from a predetermined acceptable acceptable penetration zone APZ (Figure  
12) as it is advanced from the catheter 10. In particular, by preventing or  
limiting the rotation of the needle member 30 within the needle lumen 16,  
the curved distal portion of the needle member will be deterred from  
deviating from its intended path of advancement as it is extended laterally  
10 from the catheter body 12 (see Figure 10a). Such prevention or limitation  
of the potential for rotation or lateral movement of the needle member 30  
may be accomplished in any suitable way. As described in detail  
herebelow, specific apparatus which may be incorporated into the catheter  
device 10 to prevent or deter rotation or lateral movement (i.e., "wagging"  
or "flopping") of the needle member 30 during or after its advancement from  
the catheter body 12, include:

15 a) a curved needle housing 60 which has a curve at its distal end  
which mates with the preformed curvature of the needle member 30 to deter  
rotation (see Figures 9-10f);

b) engaged surfaces 76, 77 formed on the needle member 30 and  
surrounding catheter body 12 to lock or deter rotation of the needle member  
20 30, examples of such engaged surfaces 76, 77 including but not necessarily  
being limited to i) a tongue-in-groove or key-in-key-way arrangement (see  
Figures 10d-10d") or ii) an oval to oval arrangement (see Figures 10e-10"),  
etc;

25 c) a steering mechanism for causing the distal portion of the  
catheter body 12 to curve in the lateral direction in which the needle  
member 30 is intended to advance so as to cause the preformed curve of  
the needle member 30 to mate with the induced curvature of the catheter  
body 12; and,

0 d) a needle guide member 500 which is laterally projectable from the catheter body 12 in the area of the needle outlet aperture 46 to support the needle member 30 and/or to form a lateral extension of the needle lumen 16 so as to create a lateral curve in the needle lumen which mates with the preformed curvature of the needle member 30 (see Figure 10 g).

5 i. Curved Needle Housing to Deter Rotation/Lateral Deviation of Extended Needle

10 An example of a preferred curved needle housing 60 mountable within the needle lumen 16 is specifically shown in Figures 1b-1f. Such needle housing 60 comprises a curved, rigid tube. A tubular liner 61 may be disposed within, and may extend from either end of, the curved needle housing 60. Such tubular liner 61 may be formed of a three-layer composite wherein the inner layer is a lubricious polymer material (e.g., polytetrafluoroethylene (PTFE)), the middle layer is a structural polymer material (e.g., polyimide) and the outer layer is an adhesive material which will bond to the inner surface of the curved needle housing 60 and to the inner surface of the needle lumen 16 at either end of the housing 60 (e.g., polyurethane adhesive). When the needle member 30 is in its retracted position (Figures 9 and 9a), and during advancement, the portion of the needle member which resides within the needle housing 60 will remain in a slightly curved state in conformance to the slightly curved configuration of the needle housing 60. This serves to deter the needle member 30 from rotating relative to the catheter body 12 and/or from undergoing uncontrolled movement (i.e., "flopping") out of the intended acceptable penetration zone APZ, during or after advancement from the catheter. This prevention or deterrence from rotation of the needle member 60 allows the operator to control the orientation of the lancet type or other bevel formed in the needle tip, and also enhances the operator's ability to predict the precise position of the needle tip by eliminating or minimizing the uncontrolled side-to-side



0 movement of the needle. To facilitate the desired positioning and orientation of the curved needle housing 60 during manufacture of the catheter 10, a locator member 62 may be attached to the needle housing 60 and incorporated into the catheter body 12 as shown in Figures 1b, 1e, 1f, 1f, 9a and 10a. This locator member 62 comprises a rigid disc 64 which is  
5 transversely positionable within the catheter body, having a first bore 66 and a second bore 68 extending longitudinally therethrough. A chamfered edge 69 is formed about the proximal end of the first bore 66, as shown in Figures 1f and 1f. During manufacture of the catheter body 12, a rod or mandrel is inserted through the first bore 66 of the locator and into the first lumen 14  
10 of the proximal catheter body portion 12<sub>p</sub> and the curved needle housing 60 having a tubular liner 61 extending therethrough and protruding for either end, are inserted through the second bore 68 and into the second lumen 16 of the proximal catheter body portion 12<sub>p</sub>. Thereafter, a distal plastic tube is advanced about the locator, a tubular polymer skin 73 is applied, and  
15 the composite is then heated to form the distal portion of the catheter body 12, as shown.

ii. Frictionally Engaged Surfaces of Needle Member and Catheter to Deter Rotation/Lateral Deviation of Extended Needle:

As an alternative to, or in addition to, the use of the curved needle housing 60 as a means for preventing rotation of the needle member 30 and  
20 ~~for providing more accurate and stable deployment of the needle member 30,~~ the needle member 30 and at least a portion of the second lumen 14 may incorporate engaged surfaces which are frictionally engaged to one another so as to prevent or deter rotation of the needle member 30 within  
25 the needle lumen 16. Examples of such engaged surfaces 76, 77 include a key/key-way design shown in Figures 10d-10d" or an oval/oval design such as that depicted in Figures 10e-10e".

0                   With specific reference to the showings of Figures 10d-10d", the  
key/keyway method of preventing independent rotation of the needle  
member 30 may be effected by use of a key-way element 76 in combination  
with a keyed needle 30<sub>key</sub>. The key-way element 76 comprises a tubular  
member which has a key-way shaped lumen 77 with a key portion 79  
5                   extending longitudinally therethrough. The keyed needle 30<sub>key</sub> comprises a  
hollow needle of the type described hereabove and shown in Figures 7-8b  
having a longitudinally extending rail or key member 33 formed upon a  
segment thereof. The key member 33 may be formed as a portion of the  
needle wall or may alternatively comprise a separate member, such as a  
10                  section of hypotube, affixed to the side of the needle wall. The keyed  
needle 30<sub>key</sub> is sized and configured to be advanced and retracted through  
the lumen 77 of the key-way housing, with the key member 31 being  
disposed within the key portion 79 of the lumen 77. In this manner the  
keyed needle member 30<sub>key</sub> is longitudinally advanceable and retractable,  
15                  but can not be rotated within the lumen 77 due to the engagement of the  
needle key member 31 with the key portion 79 of the lumen 77. The key-  
way element 76 is provided with a stabilizer 78 which is substantially the  
same as the needle housing stabilizer 62 described above and shown in  
Figures 1e-1f, and the key-way element 76/stabilizer 78 assembly may be  
20                  installed and mounted within the catheter body at the time of manufacture  
~~in the same manner as described hereabove with respect to the needle~~  
housing 60/stabilizer 62 assembly shown in Figures 1e-1f. This key-way  
element 76/stabilizer 78 assembly is typically installed and mounted in the  
catheter body 12 proximal to the location of the needle housing 60/locator  
25                  62 assembly shown in Figures 1e-1f but near enough to the distal end of  
the catheter device 10 to prevent the portion of the needle adjacent its distal  
end from undergoing untoward rotation within the catheter body 12 during  
the catheter insertion procedure.

0           With specific reference to the oval/oval arrangement shown in  
Figures 10e-10e", the device 10 may incorporate an oval shaped needle  
housing 76<sub>alt</sub> in combination with an oval shaped needle 30<sub>ov</sub>. The oval  
shaped needle housing 76<sub>alt</sub> comprises a tubular member positioned within  
the needle lumen 16 and having an oval shaped lumen 77<sub>alt</sub> extending  
5           longitudinally therethrough. The oval shaped needle 30<sub>ov</sub> comprises a  
hollow needle of the type described hereabove and shown in Figures 7-8b  
having an oval, ovoid or other non-round cross-sectional configuration. The  
oval shaped needle 30<sub>ov</sub> is sized and configured to be advanced and  
retracted through the lumen 77<sub>alt</sub> of the oval shaped needle housing 76<sub>alt</sub>,  
10           but can not be rotated within the lumen 77<sub>alt</sub> due to the engagement of the  
oval shaped needle member 30<sub>ov</sub> with the oval shaped wall of the housing  
lumen 77<sub>alt</sub>. The oval shaped needle housing 76<sub>alt</sub> is provided with a locator  
78 which is substantially the same as the needle housing locator 62  
described above and shown in Figures 1e-1f, and the oval shaped needle  
15           housing 76<sub>alt</sub>/locator 78 assembly may be installed and mounted within the  
catheter body 12 at the time of manufacture, in the same manner as  
described hereabove with respect to the needle housing 60/locator 62  
assembly shown in Figures 1e-1f. This oval shaped needle housing  
76<sub>alt</sub>/locator 78 assembly will typically be installed and mounted in the  
20           catheter body 12 proximal to the location of the needle housing 60/locator  
62 assembly shown in Figures 1e-1f, but near enough to the distal end of  
the catheter device 10 to prevent the portion of the needle 30<sub>ov</sub> adjacent its  
distal end from undergoing untoward rotation within the catheter body 12  
during the catheter insertion procedure.

25           *iii. Laterally Deployable Needle Guide to Deter Rotation/Lateral  
Deviation of Extended Needle:*

Figures 10g and 10g' show an example of a needle guide member  
500 which may be caused to project or extend laterally from the catheter

0 body 12 in the area of the needle outlet aperture 46 to stabilize and guide  
the advancing needle member, thereby deterring lateral or side-to-side  
movement of the needle member 30 and further constraining the path which  
will be followed by the advancing needle. The deployment of such needle  
guide member 500 may also give rise to a lateral extension of the needle  
5 lumen 16 which mates with the preformed curve of the needle member 30  
to prevent rotation of the needle member 30 in essentially the same manner  
as the curved needle housing 60 described above.

The particular laterally deployable guide member 500 shown in  
Figures 10g and 10g' is an inflatable annular member that is connected to  
10 an inflation fluid lumen 502 that extends through the catheter body 12 to  
permit inflation fluid to be infused and withdrawn from the inflatable guide  
member 500. When deflated (Figure 10g) the guide member 500 will nest  
within a depression or cut out region in the catheter's outer wall thereby  
assuming a configuration that is substantially flush with the outer surface  
15 504 of the catheter body 12. When inflated (Figure 10g') the guide member  
500 will form an annular support collar around the tissue penetrating  
member 30 as it advances laterally from the catheter body. The surface(s)  
of the inflatable guide member 500 that may be brushed against or  
contacted by the tip of the tissue penetrating member as it advances out of  
20 the outlet opening 46 may be armored or coated with a metal foil or other  
material that will resist puncture by the tip of the tissue penetrating member  
30.

iv. Steerable Catheter Body to Deter Rotation/Lateral Deviation of  
the Extended Needle Member:

25 The catheter body 12 may be provided with a mechanism for inducing  
a curve or bend in the region of the catheter body 12 proximal to the needle  
outlet aperture 46 to cause the portion of the needle lumen 16 proximal to  
the outlet aperture 46 to assume a curvature which mates with the curved

0 shape to which the needle member 30 is biased, thereby deterring rotation of the needle member 30 within the catheter in the same manner described above with respect to the curved needle housing 60. The mechanism by which the catheter body 16 may be induced to curve may be any suitable catheter steering apparatus known in the art, such as an internal pull wire or spine member formed on shape memory alloy which is alternately  
5 transitionable between a straight configuration and a curved configuration.

v. Rotational Locking of Needle Member When Retracted to Maintain Correct Orientation and Enhance Torque Transfer:

It is desirable for the proximal shaft of the tissue-penetrating catheter  
10 10 to be endowed with enough structural integrity to transmit torque to the distal end of the catheter, as necessary for precise rotational orientation and aiming of the catheter device 10 before advancement of the needle member 30 therefrom. Also, in many applications, it is desirable for the needle member 30 to be maintained in a predetermined rotational orientation within  
15 the catheter body 12 prior to advancement of the needle member 30 from the catheter 10 (i.e., while the needle member 30 is still in its retracted state). In many applications, it is also desirable to minimize the diameter of the catheter body 12 to allow it to pass through small blood vessel lumens. Each of these three (3) objectives may be achieved by rotational locking of  
20 the needle member 30 within the catheter body prior to its advancement from the catheter, as such rotational locking i) prevents unwanted needle rotation, ii) enhances the efficiency of torque transfer to the distal end of the catheter body 12 and thereby the needle, and iii) does not add any mass or additional diameter to the catheter body 12.

25 Figures 10f-10f show a needle locking collar assembly 520, which comprises an enlarged region 522 formed within the needle lumen 16, wherein a first locking collar member 524 and second locking collar member 526 are located. The first locking collar member 524 is stationarily affixed

0 to the catheter body 12 and has cavities or grooves 528 formed in the distal  
surface thereof and a central aperture through which the needle member  
30<sub>col</sub> may be advanced and retracted. The second locking collar member  
526 is affixed to the needle member 30<sub>col</sub> and has projections 530 extending  
5 from the proximal surface thereof. The projections 530 are sized, located  
and configured to be received within the grooves 528 of the first collar  
member 524 when the needle member 30<sub>col</sub> is in its retracted position,  
thereby frictionally locking the needle member 30<sub>col</sub> to prevent its rotation  
relative to the catheter body 12. However, when the needle member 30<sub>col</sub>  
10 is in its extended position, the projections 530 will not be inserted within the  
grooves 528, and the collar assembly 520 will not prevent the needle  
member 30<sub>col</sub> from rotating within the catheter body 12. It will be  
appreciated that these stabilizing devices may be employed at various  
points along the length of the catheter body, including the proximal, medial,  
distal or needle housing portion.

15 **d. Handpiece/Needle Controller:**

A handpiece/needle controller 15 is mounted on the proximal end of  
the Catheter body 12, and is useable to control the rotational orientation of  
the catheter body 12 and the advancement/retraction of the needle member  
30.

20 Also this handpiece/needle controller 15 has a proximal port 27  
formed on its proximal end through which a small guidewire (e.g., a 0.0010-  
0.016 inch diameter wire) may be advanced through the lumen 31 of the  
needle member 30, a first side port 21 through which a large guidewire (e.g.,  
a 0.030-0.040 inch diameter wire) may be advanced through the first lumen  
25 14 when that first lumen 14 is not occupied by an IVUS catheter, and a  
second side port 23 through which a flush solution may be infused into the  
catheter's second lumen 16 outside of the needle member 30 disposed  
therein.

0

**e. Catheter Body:**

5

10

The catheter body 12 includes a relatively stiff proximal section 12a, a medial section 12b, and a distal section 12c shown in Figs 1A and 1B. The catheter body exhibits varying flexibility and torque strength along its length, and may incorporate reinforcement members such as a reinforcement braid member which imparts structural integrity as well as enhancing the ability of the catheter body to transmit torque. A hand piece 15 is attached to the proximal end of the proximal section 12a, as shown. In the preferred embodiment the hand piece 15 and proximal section 12a are approximately 115cm in length. The medial section extends approximately 25cm terminating approximately 2cm from the distal section 12c. The proximal and medial sections of the catheter contain a braided component 50 as shown in Figs. 1B' and 1B'', encased in a polymer material (e.g. Pebax, nylon, polyurethane, polyester or PVC) extruded to form the inner lumen 50b and out jacket 50a of catheter body 12.

15

20

25

It has been determined that material expansion and changes in the physical properties of certain materials may occur after the catheter 10 is inserted into the patient's body and warmed from room temperature to body temperature. This material expansion and changes in the physical properties of certain materials can result in variation in the tolerances and sizing of the catheter 10 (e.g. elongation or shrinking) and can thus give rise to an unwanted modification of the position of the tissue penetrating member 30. This could, in at least some cases, interfere with the precise aiming and advancement of the tissue penetrating member as desired. Fig. 1B'' illustrates the braid angle A and pick count PC of the catheter braid 50. The "pick count" PC of the braid is, as is well known in the art, a function of the braid angle A (i.e., the greater the braid angle the more picks per inch).

0                   Also, the torque transmission and stiffness of the braided section 50  
is a function of the braid angle (i.e., a braid angle of 90 degrees provides  
maximum torque transfer and a braid angle of 0 degrees provides minimum  
torque transfer). Catheters used in the present invention that have exhibited  
5                   this phenomenon have braid angles A that result in a pick count of 50 – 70  
picks per inch. However, applicant has determined that by decreasing the  
braid angle A of the braid 50 within the proximal and medial sections of the  
catheter 10 to result in a pick count of 20 – 30 picks per inch, it is possible  
to minimize or eliminate the unwanted longitudinal expansion of the catheter  
10                  10 and/or its components, while retaining sufficient torque transmission and  
acceptable stiffness to accomplish the procedures for which the catheter 10  
is intended (examples of such procedures are illustrated in Figures 13a-14m  
herebelow). This variation in braid angle or picks per inch may vary  
depending on the material of construction of the catheter and/or the braid  
fiber, and the diameter of the catheter body.

15                   **II. The Coronary Sinus Guide Component of the Catheter System:**

Figures 11-11c show a preferred coronary sinus guide catheter/introducer assembly 200, which comprises a) a flexible coronary sinus guide catheter 203 that has a curved distal portion 204, a proximal assembly 214 mounted on the proximal end of the flexible catheter body  
20                  203, and a hollow lumen 202 extending longitudinally therethrough and b)  
an introducer 213 that has a tapered, soft distal portion 213d that protrudes  
out of and beyond the distal end DE of the guide catheter 203 and a  
guidewire lumen 215 that extends longitudinally through the introducer 213  
25                  to permit the guide catheter/introducer assembly to be advanced over a  
guidewire GW as described more fully herebelow in connection with a  
preferred method of using the catheter system 10.



0 A reinforcement braid 212, such as a wire braid, is formed within a portion of the catheter body 203 but terminates approximately 2 to 5 centimeters from the distal end DE. In this manner, the reinforcement braid 212 will prevent kinking and improve torque strength of the proximal portion of the catheter body 203, and the curved portion thereof, up to a location at  
5 about 2 to 5 centimeters from its distal end DE.

The proximal assembly comprises a rigid body 248 through which the lumen 202 extends, and upon which a proximal port 250 is formed to permit the guide introducer 213, subselective sheath 100 (Figures 4-6), tissue-penetrating catheter device 10 (Figures 1 and 9-10), or other catheters,  
10 guidewires and/or devices (e.g., blocker delivery catheter, channel connector delivery catheter, channel enlarging device, etc...) to be inserted through the lumen 202 of the coronary sinus guide catheter 200. A hemostatic valve 244, such as a cross-cut resilient membrane, a slit-cut resilient membrane, or a flapper valve) is positioned transversely within the  
15 lumen 202 of the proximal assembly 214 to prevent blood from backflowing out of the proximal port 250 when no catheter or other device is inserted therethrough and to prevent or minimize the amount of blood which may leak out of the proximal port 250 when a catheter or other device is inserted therethrough. A side port 246 is formed on the proximal assembly 214 to  
20 permit preparation fluid to be infused or injected into or through the lumen 202. A plurality of side apertures 240 are formed in the wall of the catheter body 203 near its distal end to allow pressure relief in the event that a radiographic contrast medium or other fluid is injected.

### **III. The Subselective Sheath Component of the Catheter System**

25 As shown in Figures 4-6, a preferred subselective sheath 100 of the present invention comprises a flexible sheath body 102 having a proximal hub 104 and a lumen 106 extending longitudinally therethrough. A reinforcement braid 108 is formed within the catheter body 102 to prevent

0 kinking and improve torque strength. Such reinforcement braid terminates  
distally at 0.1-1.0 centimeter from the distal end of the catheter body 102.  
A gradual taper 110 is formed about the distal end of the sheath body's  
outer surface to such that the sheath 100 will taper to a flush transition with  
the distally protruding portion 111d of its introducer 111. The lumen 202 has  
5 an inner diameter D1 which is substantially the same as the outer diameter  
of the introducer 111 that is initially inserted through the lumen 106. The  
introducer 111 has a guidewire lumen 109 that extends longitudinally  
therethrough to permit the subselective sheath/introducer assembly to be  
advanced over a previously inserted guidewire GW (e.g., a 0.035 inch  
10 guidewire). The outer diameter of the sheath 100 is sized to be advanced  
and retracted through the lumen 202 of the coronary sinus guide catheter  
200 (Figures 11-11b). The preferred method of using this subselective  
sheath 100 and introducer 111 are described in detail herebelow with  
respect to the methods of the present invention.

15 ***B. Preferred Methods for Using the Catheter System:***

The present invention also includes methods for using this catheter  
system described hereabove (or any other catheter system or devices that  
may be suitable to carry out the desired purpose), in conjunction with other  
apparatus such as guidewires, channel enlarging catheters/devices, channel  
20 connecting catheters/devices and vessel blocking catheters/devices to  
~~perform percutaneous, in-situ coronary arterio-venous bypass procedures~~  
by way of a vein-to-artery approach, such method being fully described  
herebelow and shown in step-by-step fashion in Figures 13a-13x and 14a-  
14m.

25 The catheter system described hereabove and shown in Figures 1-  
11b is useable in conjunction with a fluoroscope, an IVUS imaging catheter,  
a coronary sinus access catheter (e.g., a standard angiographic catheter),  
a channel-enlarging catheter device, lumen-blocking device(s), a 0.035 inch

0 diameter guidewire, and one or more 0.014 inch diameter guidewire(s) to  
perform various revascularization procedures including, as described in  
detail herebelow, a Percutaneous In Situ Coronary Artery Bypass (PICAB)  
procedure as well as a Percutaneous In Situ Coronary Venous  
5 Arterialization (PICVA) procedure. It will be appreciated that, in addition to  
the particular PICAB and PICVA examples described in detail herebelow,  
the catheter system of the present invention may also be useable to perform  
various other procedures such as directed drug delivery procedures of the  
type described in co-pending United States Patent Application SN  
10 09/048,147 and other revascularization procedures.

***I. A Preferred Method for Performing the PICAB Procedure:***

Figures 13a-13x show, in step-by-step fashion, an example of a  
PICAB procedure wherein the catheter system 10 of the present invention  
is used for the purpose of bypassing a blockage located in the proximal  
15 portion of the Anterior Descending Coronary Artery (LAD) of a human  
patient. In this PICAB procedure, a coronary sinus access catheter (e.g.,  
a standard angiographic catheter such as the modified Simmons-type  
angiographic catheter available from Cook Cardiology, Bloomington,  
Indiana) is initially inserted through a femoral vein or external jugular vein  
20 approach, using standard percutaneous catheter insertion technique. After  
~~such initial percutaneous catheter insertion has been accomplished,~~ the  
PICAB procedure proceeds as follows:

***First Step: Coronary Sinus Access / Introduction of First Guidewire:***

25 As shown in Figure 13a, an arterial blockage AB to be bypassed is  
located in the left anterior descending coronary artery (LAD). The coronary  
sinus access catheter 500 is advanced into the coronary sinus CS, as  
shown in Figure 13b, to assist in the placement of a 0.035 inch diameter  
guidewire GW<sub>1</sub> into the great cardiac vein (GCV) and anterior interventricular

0 vein (AIV). This guidewire GW<sub>1</sub> can be pre-loaded in the lumen of the coronary sinus access catheter 500 or can be advanced through the lumen of the coronary sinus access catheter 500 after it has been positioned in the coronary sinus, as a separate step. Thereafter, the coronary sinus access catheter 500 is removed, leaving the 0.035 inch guidewire GW<sub>1</sub> in place.

5 Second Step: Introduction of Coronary Sinus Guide Catheter / AIV Access:

As shown in Figure 13c-13d, the coronary sinus guide catheter 200 with introducer sheath 100 disposed within or through its lumen 202, is advanced over the 0.035 inch guidewire GW<sub>1</sub> until the tip of the coronary sinus guide catheter 200 is past the "mouth" of the coronary sinus. The introducer sheath 100 is then removed, leaving the coronary sinus guide catheter 200 in place, in the manner shown in Figure 13d.

Third Step: Introduction & Aiming of Tissue-penetrating Catheter.

15 As shown in Figure 13e, the tissue-penetrating catheter 10 is then inserted over the pre-positioned 0.035 inch guidewire GW<sub>1</sub>, through the lumen 202 of the coronary sinus guide catheter 200, and is advanced using fluoroscopy to a position distal to the arterial blockage AB being bypassed. The 0.035 inch guidewire GW<sub>1</sub> is then extracted and removed from the first lumen 14 of the tissue-penetrating catheter 10 and an IVUS imaging catheter (not shown) is then advanced through that first lumen 14 until the  
20 IVUS transducer resides within the hollow interior space of the orientation structure 36. The IVUS catheter is then used to receive a 360 degree ultrasound image from a vantage point within the interior space of the orientation structure 36. Such image enables the operator to see both the resident vessel (the AIV) and the target vessel (the LAD), as well as the reflections or artifacts from the three strut members 40, 42 & 44 of the orientation structure 36. Because of the disparate distancing between the  
25 strut members 40, 42 & 44, the reflections or artifacts produced by the strut

0 members will form a generally "Y" shaped image as illustrated in Figures 2  
and 3 of this patent application. The reflection  $40_{Ref}$  produced by the first  
strut member 40 is clearly distinguishable from the reflections  $42_{Ref}$ ,  $44_{Ref}$   
5 produced by the second and third strut members 42, 43, and provides an  
indication of the particular direction in which the needle member 30 will  
travel when advanced from the needle outlet opening 46 in the side of the  
catheter body 12. Thus, if the first strut member reflection  $40_{Ref}$  observed  
on the IVUS image *does not* extend directly toward or into the lumen of the  
10 LAD (as illustrated in Figure 3), the operator will rotate the tissue-penetrating  
catheter 10 until such first strut member reflection  $40_{Ref}$  observed on the  
IVUS image *does* extend directly toward or into the lumen of the LAD (as  
illustrated in Figure 2). This will ensure that the needle member 30 is  
properly aimed to enter the LAD when advanced.

*Fourth Step: Formation of Initial Arterio-Venous Penetration Tract  
Distal to Blockage:*

15 As shown in Figure 13f-13h, the tissue penetrating needle member  
30 is then advanced in the distal direction to its extended position such that  
it punctures through the wall of the resident vessel (the AIV), through any  
tissue which may exist between the resident vessel (the AIV) and the target  
vessel (the LAD) and into the lumen of the target vessel (the LAD) at a  
20 location downstream of the arterial blockage AB. This maneuver results in  
~~the formation of an initial arterio-venous penetration tract-PT.~~ With the  
needle member 30 in its extended position and its distal tip in the lumen of  
the target vessel (the LAD), a 0.014 inch diameter guidewire  $GW_2$  is inserted  
through the proximal port 27 of the tissue-penetrating catheter  
25 handpiece/needle controller 15 and advanced through the lumen 31 of the  
needle member 30 into the target vessel (the LAD), as shown in Figure 14h.  
After the 0.014 inch diameter guidewire  $GW_2$  has been introduced into the  
target vessel (the LAD) the needle member 30 is withdrawn to its retracted

0 position, leaving the 0.014 inch diameter guidewire GW<sub>2</sub> extending through  
the initially formed interstitial passageway into the target vessel (the LAD)  
as shown in Figure 14h. After the needle member 30 is withdrawn to its  
retracted position, the tissue-penetrating catheter 10 is withdrawn and  
removed, leaving the 0.014 inch guidewire in place (i.e., extending through  
5 the newly formed arterio-venous penetration tract PT).

*Fifth Step: Deployment of Blocker into Vein Lumen Distal to  
Blockage:*

As shown in Figures 13 i-k, the subselective sheath 100 with its  
introducer 111 inserted therethrough is advanced through the coronary  
10 sinus guide 200 over the large guide wire GW<sub>1</sub>. Thereafter, the introducer  
111 and guidewire GW<sub>1</sub> are removed and one or more embolic blocker  
members BM are introduced into the proximal end of the subselective  
sheath, pushed through the lumen of the subselective sheath 100 using a  
pusher rod (not shown) and expelled into the lumen of the coronary vein  
15 (the AIV) where such embolic blocker(s) expand and engage the wall of the  
vein at that location. Examples of such blocker members BM and their  
methods of implantation are described in United States Patent Application  
Serial No. 09/117,156. The 0.035 inch diameter guidewire GW<sub>1</sub> is then  
20 removed, and an embolic blocker member BM is inserted into the proximal  
end of the subselective sheath. A push rod is then advanced through the  
lumen of the subselective sheath to push the embolic blocker member BM  
out of the distal end of the subselective sheath and into its desired position  
within the lumen of the coronary vein (the AIV). It is to be noted that this  
25 blocker deployment step may be performed at this point in the procedure,  
or alternatively may be delayed until a later time in the procedure. After the  
distal blocker member BM has been implanted at its desired location, the  
0.035 inch diameter guidewire GW<sub>1</sub> is reinserted through the subselective

0 sheath 100 and the subselective sheath 100 is then withdrawn and removed as shown in Figure 13k.

Sixth Step: Formation of Initial Arterio-Venous Penetration Tract Proximal to Blockage:

5 As shown in Figures 13l-13n, the tissue-penetrating catheter 10 is then once again advanced over the 0.035 inch diameter guidewire GW<sub>1</sub>, under fluoroscopy, to a position that is proximal to the previously-formed distal penetration tract PT. The above-described fourth step is then repeated to form another initial arterio-venous penetration tract PT proximal to the blockage, and to pass a second 0.014 inch guidewire GW<sub>3</sub> through that second arterio-venous penetration tract PT. The tissue-penetrating catheter 10 is then withdrawn and removed, leaving both 0.014 inch guidewires GW<sub>1</sub> and GW<sub>3</sub> in place, in the manner shown in Figure 13n.

Seventh Step: Enlargement of Distal Penetration Tract to Form Arterio-Venous Bloodflow Passageway:

15 As shown in Figure 13o, the subselective sheath 100 and its introducer 111 are advanced through the guide catheter 203, over the second guidewire GW<sub>2</sub> to a location where the distal end of the subselective sheath 100 is within the AIV immediately adjacent the distal penetration tract PT. Thereafter, the introducer 111 is withdrawn and a channel enlarging catheter device CEC, of the type described in United States Patent  
20 ~~Application 09/056,589, is advanced over the 0.014 inch guidewire GW<sub>2</sub>~~ which extends through the distal arterio-venous penetration tract PT, thereby the dilating or enlarging that tract to form an arterio-venous bloodflow passageway PW. This step of the procedure provides control  
25 over the diameter or size of the arterio-venous bloodflow passageways PW and helps to ensure that the passageways PW will remain patent and functional following completion of the procedure. After such enlargement of the penetration tract to form the intended passageway PW, the channel

0 enlarging catheter device CEC is withdrawn and removed along with the subselective sheath 100, leaving both 0.014 inch guidewires GW<sub>1</sub> and GW<sub>3</sub> in place, in the manner shown in Figure 13p.

*Eighth Step: Placement of Connector Device in Distal Arterio-Venous Bloodflow Passageway:*

5 As an optional step, a connection device may be deployed in the passageway PW. As shown in Figures 13q-13s, the subselective sheath 100 and its introducer 111 are then advanced over the distal channel guidewire GW<sub>2</sub> to a position where the distal end of the subselective sheath 100 is in the AIV immediately adjacent the distal bloodflow passageway PW. Thereafter, the introducer 111 is removed and a connector device delivery catheter CDC, of the type described in United States Patent Application Serial No. 08/970,694, is advanced over through the subselective sheath 100 and over the 0.014 inch guidewire GW<sub>2</sub> which extends through the distal arterio-venous passageway PW, to implant a connector device CD within that passageway PW. The connector delivery catheter device CDC is then removed, along with the subselective sheath 100 and the distal 0.014 inch guidewire GW<sub>2</sub> that had extended through the distal arterio-venous passageway PW, leaving the distal connector device CD in place within the distal arterio-venous passageway PW in the manner shown in Figure 13s.

*Ninth Step: Enlargement of Proximal Penetration Tract to form the Proximal Arterio-Venous Bloodflow Passageway:*

25 As shown in Figures 13t-13u, the subselective sheath 100 and its introducer 111 are then advanced over the distal channel guidewire GW<sub>2</sub> to a position where the distal end of the subselective sheath 100 is in the AIV immediately adjacent the distal bloodflow passageway PW. Thereafter, the introducer 111 is removed and a and a channel enlarging catheter device CEC, of the type described in United States Patent



0        Application 09/056,589, is advanced over the 0.014 inch guidewire GW<sub>3</sub>  
that extends through the proximal arterio-venous penetration tract PT,  
thereby the dilating or enlarging that tract to form a proximal arterio-venous  
bloodflow passageway PW. This step of the procedure provides control  
over the diameter or size of the arterio-venous bloodflow passageways PW  
5        and helps to ensure that the passageways PW will remain patent and  
functional following completion of the procedure. After such enlargement  
of the proximal penetration tract to form the intended passageway PW, the  
channel enlarging catheter device CEC is withdrawn and removed leaving  
the subselective sheath 100 and proximal 0.014 inch guidewire GW<sub>3</sub> in  
10        place, as shown in Figure 13u.

Tenth Step: Placement of Connector Device in Proximal Arterio-Venous Passageway:

As an optional step, a connection device may be deployed in the  
passageway PW. As shown in Figures 13v, a connector device delivery  
15        catheter CDC, of the type described in United States Patent Application  
Serial No. 08/970,694, is then advanced through the subselective sheath  
100 and over the 0.014 inch guidewire GW<sub>3</sub> which extends through the  
proximal arterio-venous passageway PW, to implant a connector device CD  
within that passageway PW. The connector delivery catheter device is then  
20        removed, and the subselective sheath 100 and 0.014 inch guidewire GW<sub>3</sub>  
are then retracted to a position within the Great Cardiac Vein GCV, proximal  
to the proximal passageway PW, as shown in Figure 13w, leaving the  
proximal connector device CD in place within the proximal arterio-venous  
passageway.

25        Eleventh Step: Deployment of Blocker into Vein Lumen Proximal to Blockage:

As shown in Figure 13w, the above-described fifth step is then  
repeated to implant a second blocker device BD within the lumen of the

0 Great Cardiac Vein (GCV), proximal to the proximal arterio-venous  
passageway PW. This completes the procedure, and results in the flow of  
arterial blood from the Circumflex Artery (CX), through the proximal arterio-  
venous passageway PW, through the Great Cardiac Vein GCV and Anterior  
5 Interventricular Vein in the retrograde direction, through the distal arterio-  
venous passageway PW, and into the Left Anterior Descending coronary  
artery LAD, downstream of the blockage AB, as illustrated by the flow-  
indicating arrows on Figure 13x.

***II. A Preferred Method for Performing the PICVA Procedure:***

10 Figures 14a-14m show, in step-by-step fashion, an example of a  
PICVA procedure wherein the catheter system 10 of the present invention  
is used for the purpose causing arterial blood to be rerouted into the Anterior  
Interventricular Vein and caused to subsequently flow through the AIV in  
retrograde fashion (i.e., in a direction opposite normal venous return)  
thereby bypassing an extensive blockage within the patient's Anterior  
15 Descending Coronary Artery (LAD) and perfusing the region of myocardium  
that had been rendered ischemic due to the extensive blockage in the LAD.  
In this PIVA procedure, a coronary sinus access catheter (e.g., a standard  
angiographic catheter such as the modified Simmons-type angiographic  
catheter available from Cook Cardiology, Bloomington, Indiana) is initially  
20 inserted through a femoral vein or external jugular vein approach, using  
— standard percutaneous catheter insertion technique. After such initial  
percutaneous catheter insertion has been accomplished, the PICAB  
procedure proceeds as follows:

***First Step: Coronary Sinus Access / Introduction of First Guidewire:***

25 As shown in Figure 14a, an extensive arterial blockage AB extends  
though substantially the entire length of the left anterior descending  
coronary artery (LAD), thereby rendering this patient an unlikely candidate  
for the above-described PICAB procedure because no patent distal portion

0 of the LAD remains available to receive the bypass arterial bloodflow. It is  
appreciated that in cases where the disease AB does not extend into the  
proximal portion of the LAD, a connection may be established between the  
LAD and the AIV proximal to the blockage, but there would be no  
opportunity to make a distal connection as required by the PICAB  
5 procedure. As shown in Figure 14b, a coronary sinus access catheter 500  
is advanced into the coronary sinus CS to assist in the placement of a 0.035  
inch diameter guidewire GW<sub>1</sub> into the great cardiac vein (GCV). This  
guidewire GW<sub>1</sub> can be pre-loaded in the lumen of the coronary sinus  
access catheter 500 or can be advanced through the lumen of the coronary  
10 sinus access catheter 500 after it has been positioned in the coronary sinus,  
as a separate step. Thereafter, the coronary sinus access catheter 500 is  
removed, leaving the 0.035 inch guidewire GW<sub>1</sub> in place.

Second Step: Introduction of Coronary Sinus Guide Catheter / AIV  
Access:

15 As shown in Figure 14c-14d, the coronary sinus guide catheter 200  
with introducer sheath 100 disposed within or through its lumen 202, is  
advanced over the 0.035 inch guidewire GW<sub>1</sub> until the tip of the coronary  
sinus guide catheter 200 is past the "mouth" of the coronary sinus. The  
introducer sheath 100 is then removed, leaving the coronary sinus guide  
20 catheter 200 in place, in the manner shown in Figure 14d.

Third Step: Introduction & Aiming of Tissue-penetrating Catheter:

25 As shown in Figure 14e, the tissue-penetrating catheter 10 is then  
inserted over the pre-positioned 0.035 inch guidewire GW<sub>1</sub>, through the  
lumen 202 of the coronary sinus guide catheter 200, and is advanced using  
fluoroscopy to a position proximal to the arterial blockage AB being  
bypassed. The 0.035 inch guidewire GW<sub>1</sub> is then extracted and removed  
from the first lumen 14 of the tissue-penetrating catheter 10 and an IVUS  
imaging catheter (not shown) is then advanced through that first lumen 14

0        until the IVUS transducer resides within the imaging catheter-receiving  
space of the orientation structure 36. The IVUS catheter is then used to  
receive a 360 degree ultrasound image from a vantage point within the  
interior space of the orientation structure 36. Such image enables the  
operator to see both the resident vessel (the GCV) and the target vessel  
5        (the CX), as well as the reflections or artifacts from the three strut members  
40, 42 & 44 of the orientation structure 36. Because of the disparate  
distancing between the strut members 40, 42 & 44, the reflections or artifacts  
produced by the strut members will form a generally "Y" shaped image as  
illustrated in Figures 2 and 3 of this patent application. The reflection 40<sub>Ref</sub>  
10       produced by the first strut member 40 is clearly distinguishable from the  
reflections 42<sub>Ref</sub>, 44<sub>Ref</sub> produced by the second and third strut members 42,  
43, and provides an indication of the particular direction in which the needle  
member 30 will travel when advanced from the needle outlet opening 46 in  
the side of the catheter body 12. Thus, if the first strut member reflection  
15       40<sub>Ref</sub> observed on the IVUS image *does not* extend directly toward or into  
the lumen of the CX (as illustrated in Figure 3), the operator will rotate the  
tissue-penetrating catheter 10 until such first strut member reflection 40<sub>Ref</sub>  
observed on the IVUS image *does* extend directly toward or into the lumen  
of the CX (as illustrated in Figure 2). This will ensure that the needle  
20       member 30 is properly aimed to enter the CX when advanced.

*Fourth Step: Formation of Initial Arterio-Venous Penetration Tract  
Distal to Blockage:*

25       As shown in Figure 14f-14h, the tissue penetrating needle member  
30 is then advanced in the distal direction to its extended position such that  
it punctures through the wall of the resident vessel (the GCV), through any  
tissue which may exist between the resident vessel (the GCV) and the  
target vessel (the CX) and into the lumen of the target vessel (the CX) at a  
location downstream of the arterial blockage AB. This maneuver results in

0 the formation of an initial arterio-venous penetration tract PT. With the  
needle member 30 in its extended position and its distal tip in the lumen of  
the target vessel (the CX), a 0.014 inch diameter guidewire GW<sub>2</sub> is inserted  
through the proximal port 27 of the tissue-penetrating catheter  
handpiece/needle controller 15 and advanced through the lumen 31 of the  
5 needle member 30 into the target vessel (the CX), as shown in Figure 14h.  
After the 0.014 inch diameter guidewire GW<sub>2</sub> has been introduced into the  
target vessel (the LAD) the needle member 30 is withdrawn to its retracted  
position, leaving the 0.014 inch diameter guidewire GW<sub>2</sub> extending through  
the initially formed interstitial passageway into the target vessel (the CX) as  
10 shown in Figure 14h. Thereafter, the needle member 30 is withdrawn to its  
retracted position and the tissue-penetrating catheter 10 is withdrawn and  
removed, leaving the 0.014 inch guidewire in place (i.e., extending through  
the newly formed arterio-venous penetration tract PT), as shown in Figure  
14h.

15 *Fifth Step: Enlargement of Penetration Tract to Form Arterio-Venous  
Bloodflow Passageway:*

As shown in Figure 14i, the subselective sheath 100 and its  
introducer 111 are advanced through the guide catheter 203, over the  
second guidewire GW<sub>2</sub> to a location where the distal end of the  
20 subselective sheath 100 is within the AIV immediately adjacent the distal  
penetration tract PT. Thereafter, the introducer 111 is withdrawn and a  
channel enlarging catheter device CEC, of the type described in United  
States Patent Application 09/056,589, is advanced over the 0.014 inch  
guidewire GW<sub>2</sub> which extends through the arterio-venous penetration tract  
25 PT, thereby the dilating or enlarging that tract to form an arterio-venous  
bloodflow passageway PW. This step of the procedure provides control  
over the diameter or size of the arterio-venous bloodflow passageways PW  
and helps to ensure that the passageways PW will remain patent and

0 functional following completion of the procedure. After such enlargement of the penetration tract to form the intended passageway PW, the channel enlarging catheter device CEC is withdrawn and removed, leaving the subselective sheath 100 and second guidewire GW<sub>2</sub> in place.

5 Sixth Step: Placement of Connector Device in Arterio-Venous Bloodflow Passageway:

It may be desirable, in an optional step as shown in Figures 14j-14k, to place a connector device within the passageway PW. A connector device delivery catheter CDC, of the type described in United States Patent Application Serial No. 08/970,694, is advanced over through the subselective sheath 100 and over the 0.014 inch guidewire GW<sub>2</sub> which extends through the arterio-venous passageway PW, to implant a connector device CD within that passageway PW. The connector delivery catheter device CDC is then removed, and the subselective sheath 100 and the 0.014 inch guidewire GW<sub>2</sub> that had extended through the distal arterio-venous passageway PW are then retracted to a position proximal to the passageway PW..

15 Seventh Step: Deployment of Blocker into Vein Lumen Proximal to Blockage:

20 As shown in Figures 14l-14m, the guidewire GW<sub>2</sub> is then removed and one or more embolic blocker members BM are introduced into the proximal end of the subselective sheath 100, pushed through the lumen of the subselective sheath 100 using a pusher rod (not shown) and expelled into the lumen of the Great Cardiac Vein (GCV) proximal to the bloodflow passageway PW where such embolic blocker(s) expand and engage the wall of the vein to cause substantial occlusion and blockage of bloodflow through the vein at that location. Examples of such blocker members BM and their methods of implantation are described in United States Patent Application Serial No. 09/117,516. The 0.035 inch diameter guidewire GW<sub>1</sub>,  
25

0 is then removed, and an embolic blocker member BM is inserted into the proximal end of the subselective sheath. A push rod is then advanced through the lumen of the blocker delivery catheter to push the embolic blocker member BM out of the distal end of the subselective sheath and into its desired position within the lumen of the coronary vein (the GCV). It is to be noted that this blocker deployment step may be performed at this point in the procedure, or alternatively may be delayed until a later time in the procedure. This completes the procedure, and results in the flow of arterial blood from the Circumflex Artery (CX), through the arterio-venous passageway PW, through the Great Cardiac Vein GCV and Anterior Interventricular Vein in the retrograde direction so as to perfuse the myocardium that has been rendered ischemic due to the blockage of the Left Anterior Descending coronary artery (LAD) as illustrated by the flow indicating arrows on Figure 14m.

15 It is to be understood and appreciated that the invention has been described herein with reference to certain presently preferred embodiments and examples only, and no effort has been made to exhaustively describe all possible embodiments and examples of the invention. Indeed, as those skilled in the art will appreciate, various additions, deletions, modifications and variations may be made to the particular embodiments and examples described hereabove without departing from the intended spirit and scope of the invention. For example, where this patent application has listed the steps of a method or procedure in a specific order, it may be possible (or even expedient in certain circumstances) to change the order in which some steps are performed, and it is intended that the particular steps of the method or procedure claims set forth herebelow not be construed as being order-specific unless such order specificity is expressly stated in the claim. Another example is that, although the specific procedures described in detail in this application involve penetrating through tissue located within an

0

"acceptable penetration zone," such acceptable penetration zone need not be occupied by tissue but rather such acceptable penetration zone may fully or partially comprise an open space such as a body cavity or void. Accordingly, it is intended that all such additions, deletions, modifications and variations be included within the scope of the following claims.



## CLAIMS

What is claimed is:

1. A tissue penetrating catheter device useable to penetrate outwardly from the lumen of a blood vessel in which the catheter device is positioned, through the wall of that blood vessel, and to a target location, said device comprising:

i) a flexible catheter body which is insertable into the vein, said catheter body having a side wall, a proximal end, a distal end and an outlet opening formed in the side wall thereof;

ii) an first lumen through which a separate imaging catheter may be inserted;

iii) a second lumen which extends through said outlet opening;

iv) a tissue penetrating member disposed within said second lumen and advanceable out of said outlet opening; and,

v) an orientation structure positioned on the catheter body, said orientation structure having a) an imaging catheter-receiving space

formed therein in alignment with said first lumen and b) at least one marker member located on one side of the imaging catheter receiving space, said at least one marker being positioned and constructed to create on an image display received from an imaging catheter positioned within the imaging catheter-

receiving space, an indication of the path that will be followed by the tissue penetrating member as the tissue penetrating member is advanced from the catheter body.

2. The catheter device of Claim 1 wherein a guidewire lumen which extends longitudinally through said tissue penetration member.
3. The catheter device of Claim 1 wherein the orientation structure comprises a plurality of strut members that extend longitudinally, at circumferentially spaced-apart locations, about said hollow interior space, a first one of said strut members being a) located at a radial position which is aligned with location of the tissue penetration member outlet opening and b) constructed to produce an ultrasound image which is distinguishable from the images produced by the other(s) of said strut members, said first one of said strut members being thereby operative to create, on an image received through an IVUS catheter positioned within hollow interior space.
4. The catheter device of Claim 3 further comprising:  
a distal tip member formed on the distal end of said orientation apparatus.
5. The catheter device of Claim 4 wherein a lumen extends through the distal tip member such that an imaging catheter may be advanced from the hollow interior space of the orientation structure through the lumen of the distal tip member.

6. The catheter device of Claim 1 wherein the tissue penetration member is resilient and has a distal portion which is preformed to a curved configuration, such that when the tissue penetration member is in its retracted position it will conform to the shape of the first lumen of the catheter body and when the tissue penetration member is in its extended position its distal portion will assume the curved configuration to which it was preformed.
  7. The catheter device of Claim 6 wherein the distal portion of said tissue penetration member is preformed to a curved configuration which has a radius of curvature.
  8. The catheter device of Claim 1 wherein said tissue penetration member has a lancet type bevel formed on its distal end.
  9. The catheter device of Claim 6 further comprising:  
a rigid, tubular tissue penetration member housing disposed within said second lumen such that, when the tissue penetration member is in its retracted position, the distal tip of the tissue penetration member will be disposed within said tissue penetration member housing.
- 
10. The catheter device of Claim 9 wherein said tissue penetration member housing is curved outwardly toward said tissue penetration member outlet aperture.
  11. The catheter device of Claim 10 wherein the catheter body is slightly bent to conform with the curvature of said tissue penetration member housing.

12. The catheter device of Claim 9 wherein a tubular liner is disposed within the tubular tissue penetration member housing.
13. The catheter device of Claim 12 wherein said tubular liner is formed of plastic.
- ~~14. The catheter device of Claim 12 wherein said tubular liner comprises an inner lubricious layer, a middle structural layer and an outer adhesive layer.~~
15. The catheter device of Claim 12 wherein said tubular liner extends out of and beyond either end of the tubular tissue penetration member housing.
16. The catheter device of Claim 10 wherein a locator body is connected to said tubular tissue penetration member housing and disposed within said catheter body to stabilize the position and rotational orientation of said tubular tissue penetration member housing.
17. The catheter device of Claim 11 wherein the frictionally engaged surfaces are formed on said tissue penetration member and said catheter body to deter rotation of the tissue penetration member relative to the catheter body.
18. The catheter device of Claim 17 wherein said frictionally engaged surfaces comprise a key formed on one of said tissue penetration member and said catheter body and a

keyway formed on the of said catheter and catheter body, said key being received within said keyway to deter rotation of the tissue penetration member within the catheter body.

19. The catheter device of Claim 17 wherein said frictionally engaged surfaces comprise a non-round cross sectional configuration of said tissue penetration member and a non-round cross-sectional configuration of at least a portion of the catheter which surrounds said tissue penetration member, such that the tissue penetration member is deterred from rotating within the catheter body.

20. A system for creation of a penetration tract from the lumen of a coronary vein to the lumen of a coronary artery in a mammalian heart which has a coronary venous sinus, said system comprising a catheter device according to Claim 1 in combination with:

a coronary sinus guide catheter which comprises a flexible catheter body having a proximal end, a distal end, a lumen extending longitudinally therethrough, and a curvilinear segment formed near its distal end;

said catheter device being passable through the lumen of the coronary sinus guide catheter and into a coronary vein.

21. The system of Claim 20 wherein said coronary sinus guide catheter further comprises:

a hemostatic valve associated with the lumen of the guide catheter, said hemostatic valve being constructed to allow the catheter device to pass therethrough, and said hemostatic valve being operative to:

i) prevent blood from back-flowing out of the coronary sinus guide catheter lumen when the catheter device is not inserted therethrough, and,

ii) form a seal about the catheter device when the catheter device is inserted through the lumen of the guide catheter to prevent blood from back-flowing therethrough.

22. The system of Claim 20 further comprising:

an tubular introducer sheath having a tapered distal end and a lumen extending longitudinally therethrough;

said introducer sheath being passable through the lumen of the coronary sinus guide catheter and into the coronary vein; and,

said catheter device being insertable through the lumen of the introducer sheath and into the coronary vein, distal to the distal end of the introducer sheath.

23. A tissue-penetrating catheter device that is positionable in the lumen of a blood vessel and useable to form a penetration tract that extends from the lumen of the blood vessel, through the wall of that blood vessel, through a predetermined acceptable penetration zone and to a target location within the patient's body, said catheter device comprising:

i) a flexible catheter body that is insertable into a blood vessel, said catheter body having a proximal end, a distal end, a outlet opening;

ii) a lumen that extends through said outlet opening;

iii) a tissue penetrating member disposed within said lumen, said tissue

penetrating member being sized and configured such that when sufficiently aimed and stabilized, it will advance out of the outlet port, through the wall of the blood vessel, through the acceptable penetration zone and to said target location;

iv) a stabilizer that is configured to deter the tissue ~~penetrating member from deviating from said acceptable~~ penetration zone as it is advanced to said target location.

24. The catheter device of Claim 23 wherein a guidewire lumen extends longitudinally through said tissue penetration member.

25. The catheter device of Claim 23 wherein the stabilizer is selected from the group of stabilizers consisting of;

engagement members for frictional engagement between the tissue penetrating member and the catheter body;

bushings disposed within the lumen that constrains the tissue penetrating member to prevent side-to-side movement thereof;

a reduced diameter region of the lumen that constrains the tissue penetrating member to prevent side-to-side movement thereof;

at least one magnet that creates a magnetic which prevents side to side movement of the tissue penetrating member; and,

a member that is laterally deployable from the catheter adjacent the outlet opening to deter side-to-side movement of the tissue-penetrating-member when it is advanced from the catheter.

26. The catheter device of Claim 23 wherein the stabilizer comprises:

a rigid, tubular tissue penetration member housing disposed within said second lumen such that, when the tissue penetration member is in its retracted position, the distal tip of the tissue penetration member will be disposed within said tissue penetration member housing.

27. The catheter device of Claim 26 wherein said tissue penetration member housing is curved outwardly toward said tissue penetration member outlet aperture. — — — — —

28. The catheter device of Claim 27 wherein the catheter body is slightly bent to conform with the curvature of said tissue penetration member housing.

29. The catheter device of Claim 26 wherein a tubular liner is disposed within the tubular tissue penetration member housing.

29. The catheter device of Claim 29 wherein said tubular liner is formed of plastic.

31. The catheter device of Claim 29 wherein said tubular liner comprises an inner lubricious layer, a middle layer and an outer adhesive layer.

32. The catheter device of Claim 29 wherein said tubular liner extends  
out of and beyond either end of the tubular tissue penetration member housing.



33. The catheter device of Claim 31 wherein a stabilizer body is connected to said tubular tissue penetration member housing and disposed within said catheter body to stabilize the position and rotational orientation of said tubular tissue penetration member housing.

34. The catheter device of Claim 23 wherein the tissue penetration member is curved such that rotation of the tissue penetrating member while it is advanced from the catheter will cause the tissue penetration member to deviate from the acceptable penetration zone and wherein said stabilizer comprises frictionally engaged surfaces formed on said tissue penetration member and said catheter body to deter rotation of the tissue penetration member relative to the catheter body.

35. The catheter device of Claim 34 wherein said frictionally engaged surfaces comprise a key formed on one of said tissue penetration member and said catheter body and a keyway formed on the other of said catheter and catheter body, said key being received within said keyway to deter rotation of the tissue penetration member within the catheter body.

36. The catheter device of Claim 34 wherein said frictionally engaged surfaces comprise the lateral surface of a tissue penetration member of non-round cross sectional configuration and a corresponding non-round cross-sectional configuration of at least a portion of the catheter which surrounds said tissue penetration member, such that the tissue penetration member is deterred from rotating within the catheter body.

37. The catheter device of Claim 23 wherein said stabilizer comprises

a laterally deployable member adjacent the outlet port, said laterally deployable member being initially disposable in a stowed position whereby it is substantially non-protrusive from the catheter and subsequently deployable to a laterally extended position wherein it supports the tissue penetrating member and deters the tissue penetrating member from deviating from the acceptable penetration zone as it is advanced.

38. The catheter device of Claim 1 further comprising a laterally deployable member adjacent the outlet port, said laterally deployable member being initially disposable in a stowed position whereby it is substantially non-protrusive from the catheter and subsequently deployable to a laterally extended position wherein it supports the tissue penetrating member and deters the tissue penetrating member from deviating from the acceptable penetration zone as it is advanced.

39. The catheter of Claim 1 further comprising a rotational lock apparatus for preventing at least a portion of the tissue penetration member from rotating within the catheter while the tissue penetration member is in its retracted position.

---

40. The catheter of Claim 23 further comprising a rotational lock apparatus for preventing at least a portion of the tissue penetrating member from rotating within the catheter while the tissue penetration member is in its retracted position.

41. The catheter device of Claim 40 wherein said rotational lock apparatus comprises a first member formed on the catheter body and a

second member formed on the tissue penetration member such that, when the tissue penetration member is in its retracted position, the first and second members will frictionally engage one another to prevent rotation of at least the portion of the tissue penetrating member that is distal to the second member.

42. A catheter system for forming a penetration tract from the lumen of a coronary blood vessel of a mammalian patient to a target location within the patient's body, said catheter system comprising:

a. a coronary sinus guide catheter having a distal end, said coronary sinus guide catheter being configured to be advanced transluminally through the patient's venous vasculature until its distal end is positioned in the patient's coronary venous sinus;

b. a tissue penetrating catheter that is insertable through the lumen of the coronary sinus guide catheter, said tissue penetrating catheter comprising:

i) a flexible catheter body having a proximal end, a distal end

and an outlet port formed in one side thereof ;

ii) a lumen which extends through said outlet port; and,

iii) a tissue penetrating member disposed within said lumen and advanceable out of said outlet port;

c. a subselective sheath that comprises a tube having a

lumen and a distal end, said tube being sized to be advanced through the lumen of the coronary sinus guide catheter.

43. The system of Claim 42 further comprising:  
a coronary sinus guide introducer having a tapered distal portion and a guidewire lumen that extends longitudinally therethrough, said coronary sinus guide introducer being insertable through the lumen of the coronary sinus guide catheter such that its tapered distal portion protrudes out of and beyond the distal end of the coronary sinus guide catheter;
44. The system of Claim 42 further comprising:  
a subselective sheath introducer having a tapered distal portion and a guidewire lumen that extends longitudinally therethrough, said subselective sheath introducer being insertable through the lumen of the subselective sheath such that its tapered distal portion protrudes out of and beyond the distal end of the subselective sheath.
45. A method for performing a percutaneous in situ coronary venous arterialization, said method comprising:
- A. providing a catheter system that includes:
- i) a coronary sinus guide catheter having a distal end, said coronary sinus guide catheter being configured to be advanced transluminally through the patient's venous vasculature until its distal end is positioned in the patient's coronary venous sinus;
- ii) a tissue penetrating catheter that comprises a) a flexible catheter body having a proximal end, a distal end and an outlet port formed in one side thereof; b) a lumen that extends through said outlet port; and, c) a tissue penetrating member having a lumen extending longitudinally therethrough,

said tissue penetrating member being disposed within said lumen and advanceable out of said outlet port;

iii) a subselective sheath having a distal end and a lumen that extends longitudinally therethrough, said sheath being sized to be advanced through the lumen of the coronary sinus guide catheter; B. inserting a first guidewire having a proximal end and a distal

end such the distal end of said first guidewire is in the coronary venous vasculature and its proximal end is outside of the patient's body;

C. advancing the coronary sinus guide catheter over the first guidewire to a position where the distal end of the coronary sinus guide catheter is within the coronary sinus;

D. advancing the tissue penetrating catheter through the lumen of the

coronary sinus guide catheter and over the first guidewire, to a position within a coronary vein;

E. rotationally orienting the tissue penetrating catheter to aim the tissue penetrating member at a location within the lumen of an artery;

F. advancing the tissue penetrating member from the catheter to form a penetration tract through a predetermined acceptable penetration zone that includes penetration through the wall of the vein and the wall of the artery, such that the distal end of the tissue penetration member is in the lumen of the artery;

G. passing a second guidewire through the lumen of the tissue penetrating member and into the lumen of the artery;

H. retracting the tissue penetration member into the tissue penetrating catheter and removing the tissue penetrating catheter, leaving the second guidewire in place;

I. thereafter advancing the subselective sheath through the lumen of the coronary sinus guide catheter and over the second

guidewire to a position where the distal end of the subselective sheath is located within the vein adjacent the penetration tract formed in Step F;

J. providing a tract enlarging catheter, advancing said tract enlarging catheter through the subselective sheath and using the tract enlarging catheter to enlarge the penetration tract formed in Step F to create a bloodflow passageway between the vein and artery;

K. removing the tract enlarging catheter, leaving the subselective sheath and second guidewire in place;

L. providing a connector delivery catheter and a connector that is deployable into the bloodflow passageway to maintain said bloodflow passageway after completion of the operative procedure and passing the connector delivery catheter through the subselective sheath and delivering said connector into said bloodflow passageway;

M. removing the connector delivery catheter leaving the subselective sheath and second guidewire in place;

N. retracting the subselective sheath to a location within the vein that is proximal to the location of the bloodflow passageway;

O. removing the second guidewire;

P. delivering through the subselective sheath a blocker member to block the lumen of the vein proximal to the location of the bloodflow passageway; and,

Q. removing the subselective sheath and coronary sinus guide catheter.

46. The method of Claim 45 wherein the catheter system provided in

Step A further comprises:

a coronary sinus guide introducer having a tapered distal portion and a guidewire lumen that extends longitudinally therethrough, said

coronary sinus guide introducer being insertable through the lumen of the coronary sinus guide catheter such that its tapered distal portion protrudes out of and beyond the distal end of the coronary sinus guide catheter;

and wherein Step C comprises:

placing the coronary sinus guide introducer through the lumen of the coronary sinus guide catheter such that at least part of its tapered distal portion protrudes out of the guide catheter's distal end;

inserting the proximal end of the first guidewire into the guidewire lumen of the coronary sinus guide introducer and advancing the coronary sinus guide catheter and coronary sinus guide introducer over the first guidewire until the distal end of the coronary sinus guide catheter is in the coronary sinus; and,

removing the coronary sinus guide introducer leaving the coronary sinus guide catheter and first guidewire in place.

47. The method of Claim 45 wherein the catheter system provided in

Step A further comprises:

a subselective sheath introducer having a tapered distal portion and a guidewire lumen that extends longitudinally therethrough, said subselective sheath introducer being insertable through the lumen of the

subselective sheath such that its tapered distal portion protrudes out of and beyond the distal end of the subselective sheath;

and wherein Step G comprises:

placing the subselective sheath introducer through the lumen of the subselective sheath such that at least part of its tapered distal portion protrudes out of the subselective sheath's distal end;

inserting the proximal end of the second guidewire into the guidewire lumen of the subselective sheath introducer and advancing the subselective sheath and subselective sheath introducer over the first guidewire until the distal end of the subselective sheath is positioned in the coronary vein adjacent to said penetration tract; and,

removing the subselective sheath introducer leaving the subselective sheath and second guidewire in place.

---

48. The method of Claim 45 wherein Step G is eliminated and the tract enlarging catheter of Step G is advanced into position and utilized without the subselective sheath.

49. The method of Claim 45 wherein Steps I and J comprise:

I. removing the tract enlarging catheter and subselective sheath, leaving the second guidewire in place;

J. providing a connector delivery catheter and a connector that



is deployable into the bloodflow passageway to maintain said bloodflow passageway after completion of the operative procedure, advancing the connector delivery catheter over the second guidewire and delivering said connector into said bloodflow passageway.

50. The method of Claim 45 wherein the tissue penetrating catheter provided in Step A further comprises:

- an imaging catheter lumen through which a separate imaging catheter may be inserted; and,

- an orientation structure positioned on the catheter body, said orientation structure having an imaging catheter-receiving space formed therein in alignment with said first lumen and at least one marker member located on one side of the imaging catheter receiving space, said at least one marker being positioned and constructed to create on an image display received from an imaging catheter positioned within the imaging catheter-receiving space, an indication of the .

and wherein Step E comprises:

- inserting an imaging catheter through the imaging catheter lumen and into the imaging catheter receiving space; using said imaging catheter to image the target location within said artery; rotating the tissue penetrating catheter as necessary to cause the indication of the path that will be followed by the tissue penetrating member as the tissue penetrating member is advanced from

the catheter body to indicate that said tissue penetrating member will pass into said target location within said artery.

51. The method of Claim 45 wherein the tissue penetrating catheter provided in Step A further comprises:

a stabilizer that is configured to deter the tissue penetrating member from deviating from said acceptable penetration zone as it is advanced to said target location; and,

wherein Step F comprises;

advancing the tissue penetrating member while utilizing said stabilizer to prevent the tissue penetrating member from deviating from said acceptable penetration zone, thereby forming a penetration tract through the acceptable penetration zone that includes penetration through the wall of the vein and the wall of the artery, such that the distal end of the tissue penetration member is in the lumen of the artery.

52. A method for performing a percutaneous in situ coronary artery bypass, said method comprising:

AA. providing a catheter system that includes:

i) a coronary sinus guide catheter having a distal end, said coronary sinus guide catheter being configured to be advanced transluminally through the patient's venous vasculature until its distal end is positioned in the patient's coronary venous sinus;

ii) a tissue penetrating catheter that comprises a) a flexible catheter body having a proximal end, a distal end and an outlet port formed in one side thereof; b) a lumen that extends through said outlet port; and, c) a tissue penetrating member having a lumen extending longitudinally therethrough, said tissue penetrating

member being disposed within said lumen and advanceable out of said outlet port;

iii) a subselective sheath having a distal end and a lumen that extends longitudinally therethrough, said sheath being sized to be advanced through the lumen of the coronary sinus guide catheter;

AB. inserting a first guidewire having a proximal end and a distal end into the patient such the distal end of said first guidewire is in the coronary venous vasculature and its proximal end is outside of the patient's body;

AC. advancing the coronary sinus guide catheter over the first guidewire to a position where the distal end of the coronary sinus guide catheter is within the coronary sinus;

AD. advancing the tissue penetrating catheter through the lumen of the

coronary sinus guide catheter and over the first guidewire, to a first position within a coronary vein;

AE. rotationally orienting the tissue penetrating catheter to aim the tissue penetrating member at a first target location within the lumen of an artery;

AF. advancing the tissue penetrating member from the catheter to form a first penetration tract distal to the obstruction, said first penetration tract extending through a predetermined acceptable penetration zone that includes penetration through the wall of the vein and the wall of the artery, such that the distal end of the tissue penetration member enters the lumen of the artery;

AG. passing a second guidewire through the lumen of the tissue penetrating member and into the lumen of the artery;

AH. retracting the tissue penetration member into the tissue penetrating catheter and removing the tissue penetrating catheter, leaving the second guidewire in place;

AI. advancing the subselective sheath over the first guidewire to a location that is distal to the first penetration tract formed in Step AF;

AJ. delivering through the subselective sheath a blocker member to block the lumen of the vein distal to the first penetration tract;

AK. removing the subselective sheath, leaving the first guidewire in place;

AL. advancing the tissue penetrating catheter through the lumen of the coronary sinus guide catheter and over the first guidewire, to a second position within a coronary vein;

AM. rotationally orienting the tissue penetrating catheter to aim the tissue penetrating member at a second target location within the lumen of an artery;

AN. advancing the tissue penetrating member from the catheter to form a second penetration tract proximal to the obstruction, said second penetration tract extending through a predetermined acceptable penetration zone that includes penetration through the wall of the vein and the wall of the artery, such that the distal end of the tissue penetration member enters the lumen of the artery;

AO. passing a third guidewire through the lumen of the ~~tissue penetrating member and into the lumen of the artery;~~

AP. retracting the tissue penetration member into the tissue penetrating catheter and removing the tissue penetrating catheter, leaving the third guidewire in place;

AQ. advancing the subselective sheath through the lumen of the coronary sinus guide catheter and over the second guidewire to a position where the distal end of the subselective sheath is located within the vein adjacent the first penetration tract formed in Step AF;

AR. providing a tract enlarging catheter, advancing said tract enlarging catheter through the subselective sheath and using the tract enlarging catheter to enlarge the first penetration tract formed in

Step AF to create a bloodflow passageway between the vein and artery distal to the obstruction;

AS. removing the tract enlarging catheter, leaving the subselective sheath and second guidewire in place;

AT. providing a connector delivery catheter and a connector that is deployable into the bloodflow passageway to maintain said bloodflow passageway after completion of the operative procedure and passing the connector delivery catheter through the subselective sheath and delivering said connector into said bloodflow passageway;

AU. removing the connector delivery catheter, subselective sheath and second guidewire;

AV. advancing the subselective sheath through the lumen of the coronary sinus guide catheter and over the third guidewire to a position where the distal end of the subselective sheath is located within the vein adjacent the second penetration tract formed in Step AN;

AW. providing a tract enlarging catheter, advancing said tract enlarging catheter through the subselective sheath and using the tract enlarging catheter to enlarge the second penetration tract formed in Step AN to create a proximal bloodflow passageway between the vein and artery proximal to the obstruction;

AX. removing the tract enlarging catheter, leaving the subselective sheath and third guidewire in place;

AY. providing a connector delivery catheter and a connector that is deployable into the proximal bloodflow passageway to maintain said bloodflow passageway after completion of the operative procedure and passing the connector delivery catheter through the subselective sheath and delivering said connector into said proximal bloodflow passageway;

AZ. removing the connector delivery catheter;

- BA. retracting the subselective sheath to a location within the vein that is proximal to the location of the bloodflow passageway;
- BB. removing the third guidewire;
- BC. delivering through the subselective sheath a blocker member to block the lumen of the vein proximal to the location of the proximal bloodflow passageway; and,
- BD. removing the subselective sheath and coronary sinus guide catheter.

53. The method of Claim 52 wherein the catheter system provided in Step AA further comprises:

a coronary sinus guide introducer having a tapered distal portion and a guidewire lumen that extends longitudinally therethrough, said coronary sinus guide introducer being insertable through the lumen of the coronary sinus guide catheter such that its tapered distal portion protrudes out of and beyond the distal end of the coronary sinus guide catheter;

wherein Step AC comprises:

placing the coronary sinus guide introducer through the lumen of the coronary sinus guide catheter such that at least part of its tapered distal portion protrudes out of the guide catheter's distal end;

inserting the proximal end of the first guidewire into the guidewire lumen of the coronary sinus guide introducer and

advancing the coronary sinus guide catheter and coronary sinus guide introducer over the first guidewire until the distal end of the coronary sinus guide catheter is in the coronary sinus; and,

removing the coronary sinus guide introducer leaving the coronary sinus guide catheter and first guidewire in place.

54. The method of Claim 52 wherein the catheter system provided in

Step AA further comprises:

a subselective sheath introducer having a tapered distal portion and a guidewire lumen that extends longitudinally therethrough, said subselective sheath introducer being insertable through the lumen of the subselective sheath such that its tapered distal portion protrudes out of and beyond the distal end of the subselective sheath;

—wherein Step AQ comprises:

placing the subselective sheath introducer through the lumen of the subselective sheath such that at least part of its tapered distal portion protrudes out of the subselective sheath's distal end;

inserting the proximal end of the second guidewire into the guidewire lumen of the subselective sheath introducer and advancing the subselective sheath and

subselective sheath introducer over the first guidewire until the distal end of the subselective sheath is positioned in the coronary vein adjacent to said first penetration tract formed in Step AF; and,

removing the subselective sheath introducer leaving the subselective sheath and second guidewire in place;

and wherein Step AQ comprises:

placing the subselective sheath introducer through the lumen of the subselective sheath such that at least part of its tapered distal portion protrudes out of the subselective sheath's distal end;


inserting the proximal end of the third guidewire into the guidewire lumen of the subselective sheath introducer and advancing the subselective sheath and subselective sheath introducer over the first guidewire until the distal end of the subselective sheath is positioned in the coronary vein adjacent to said second penetration tract formed in Step AN; and,

removing the subselective sheath introducer leaving the subselective sheath and third guidewire in place;



55. The method of Claim 52 wherein Steps AQ and AV are eliminated and the tract enlarging catheter of Steps AR and AW advanced into position and utilized without the subselective sheath.



1/32

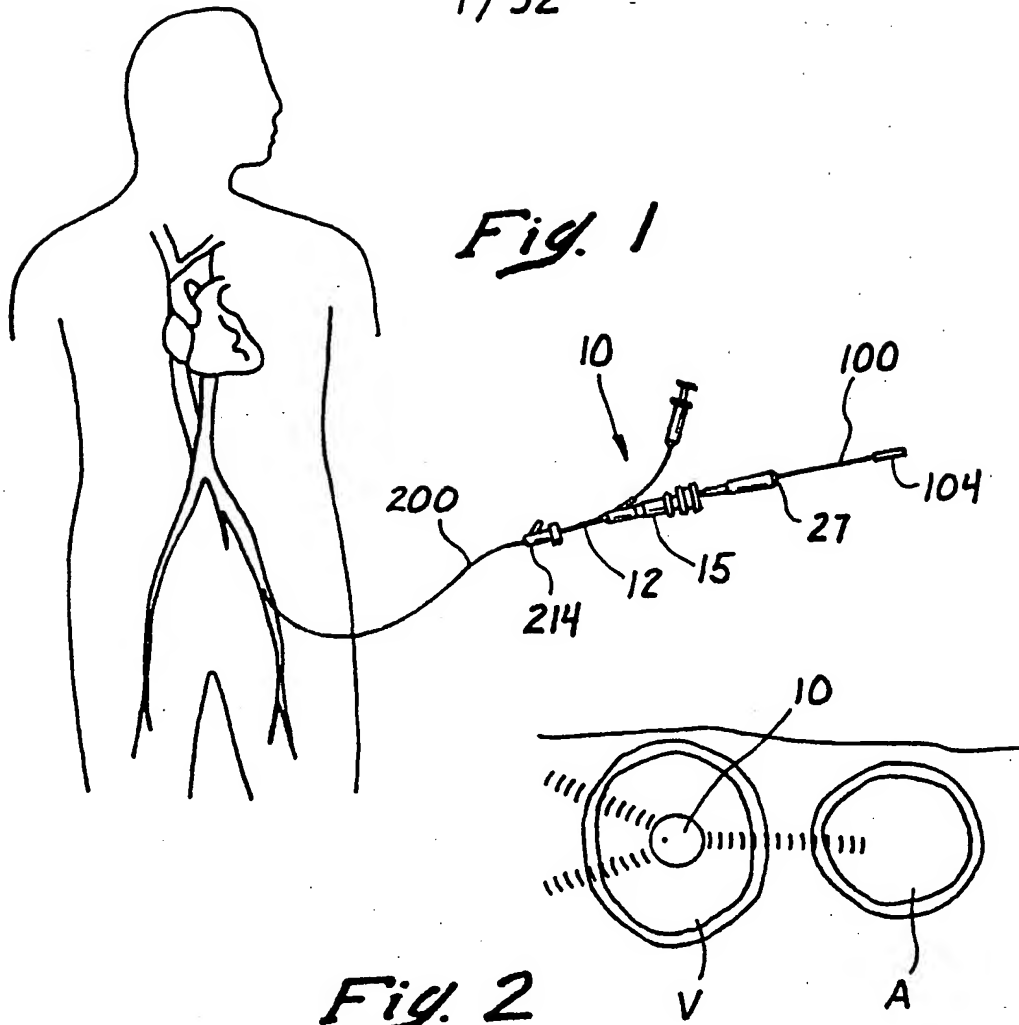


*Fig. 2*

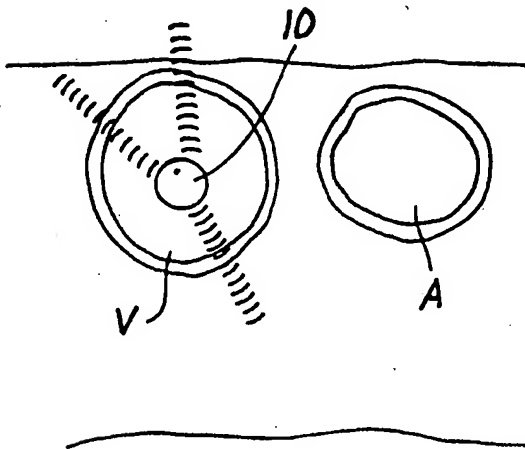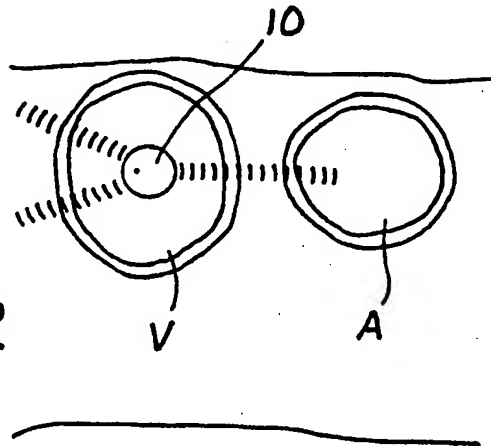


*Fig. 3*


2/32

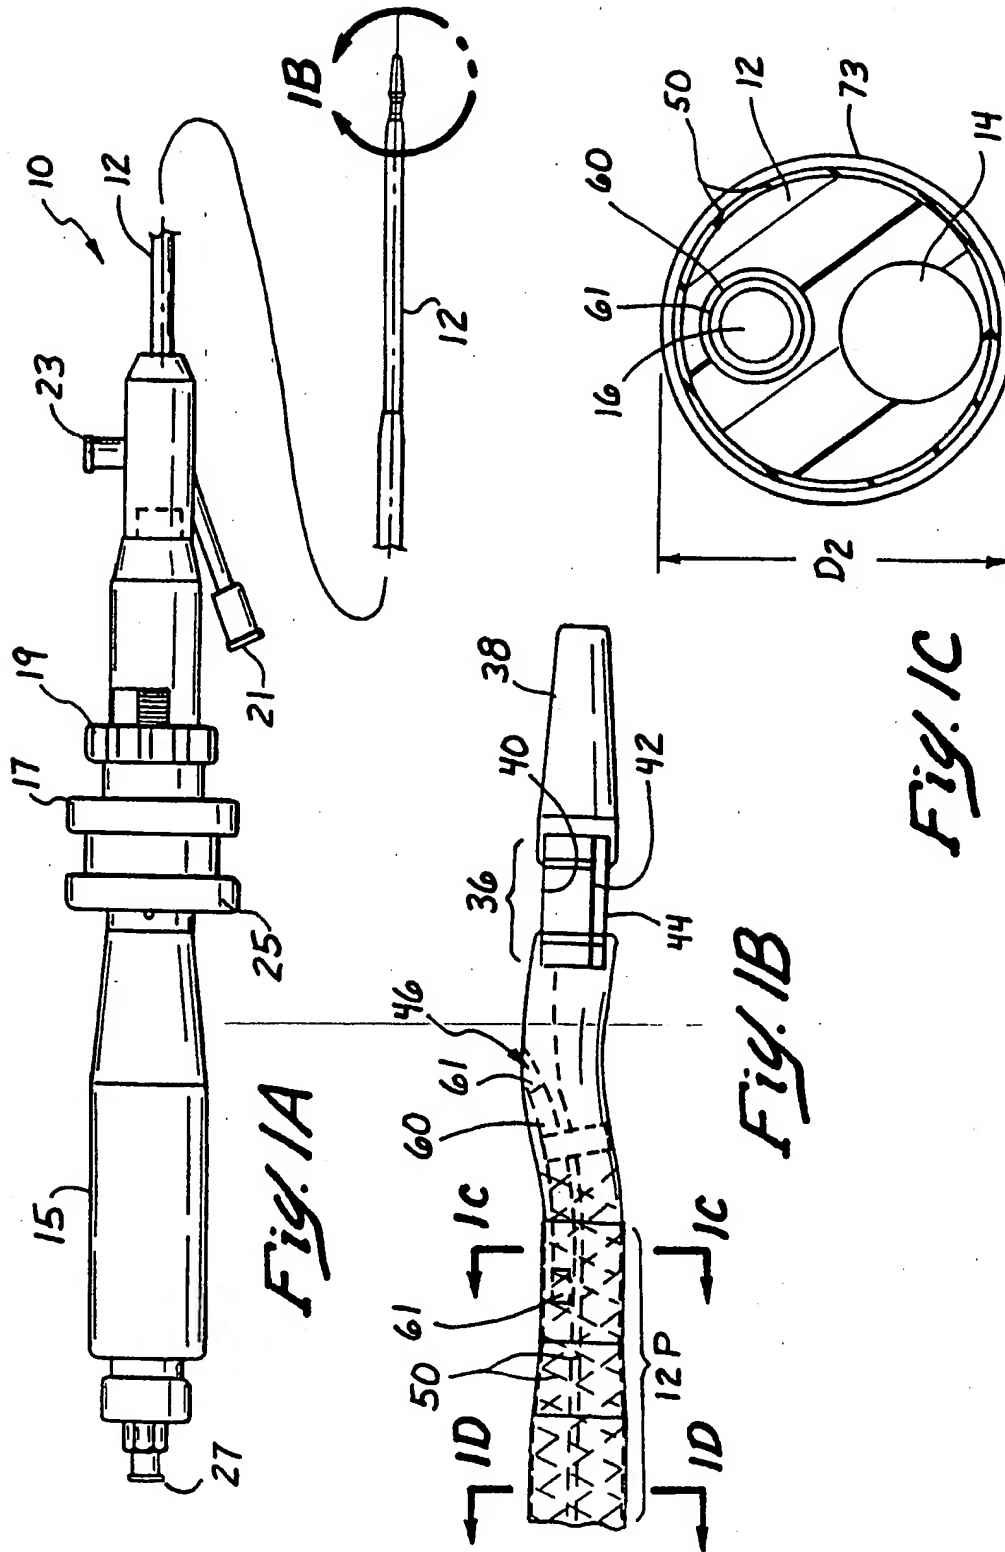


3/32

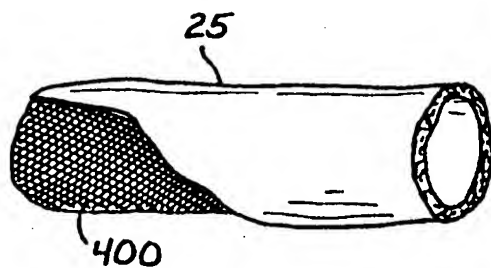

*Fig. 1a'*



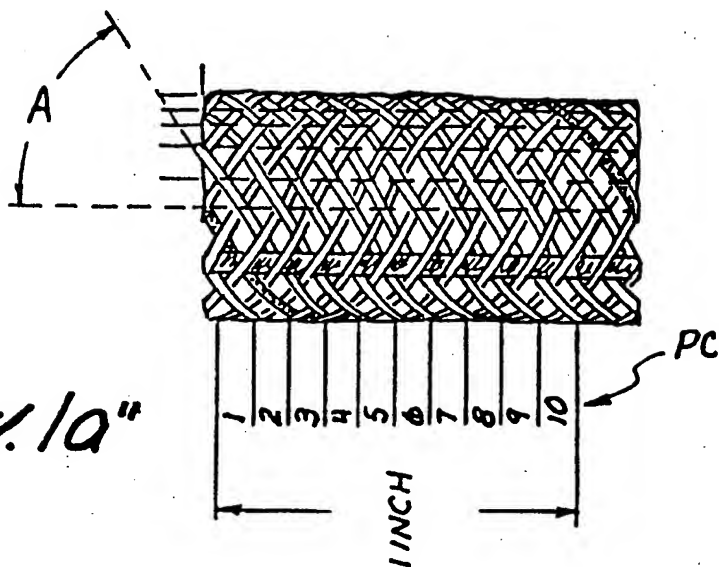


*Fig. 1a''*



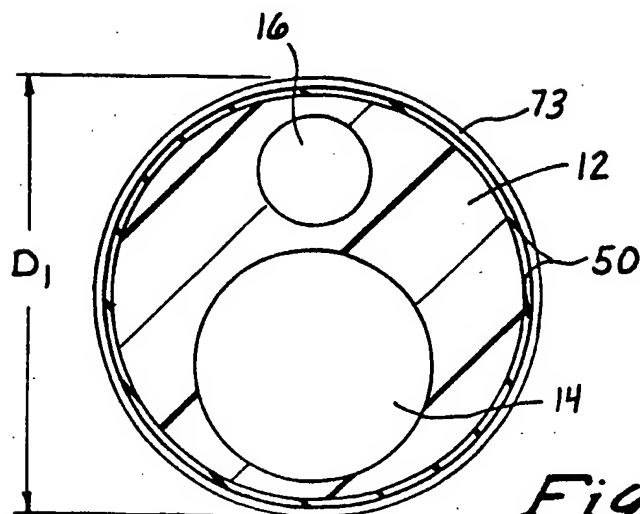


*Fig. 1D*




4/32

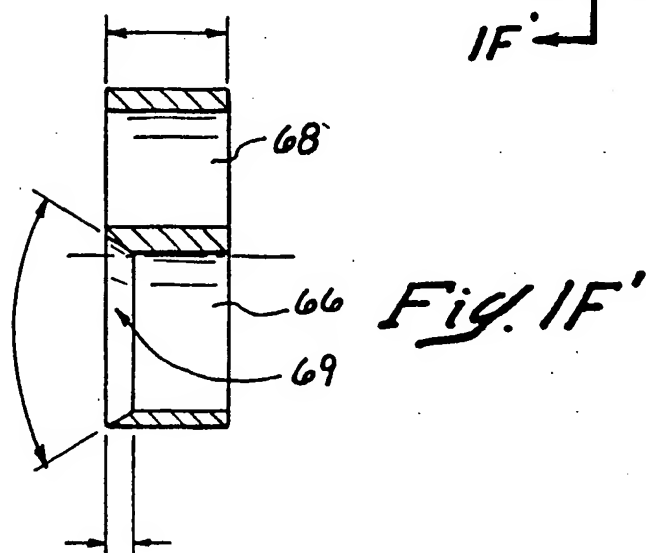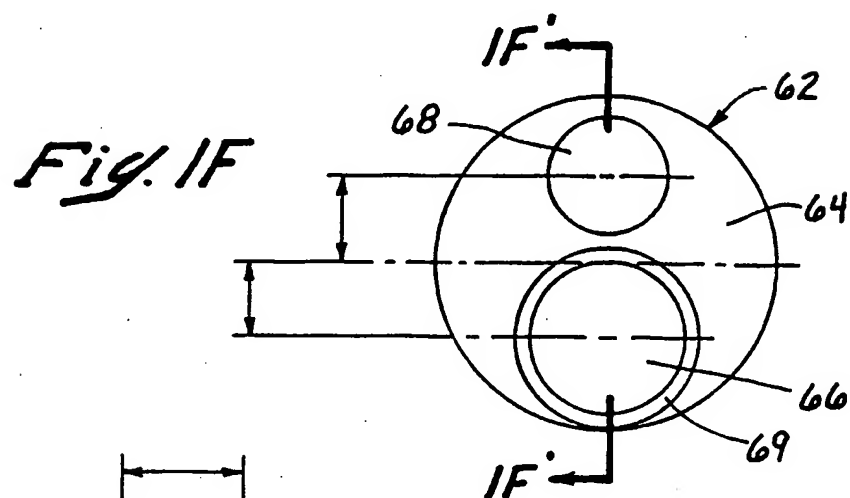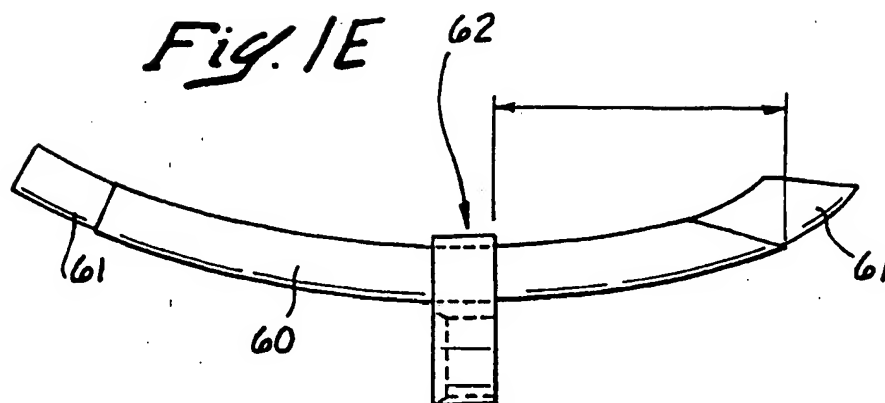




5/32

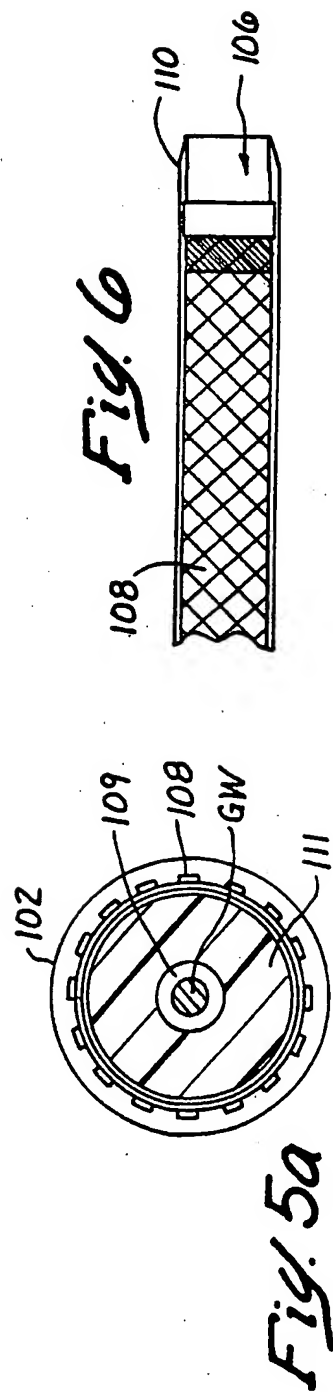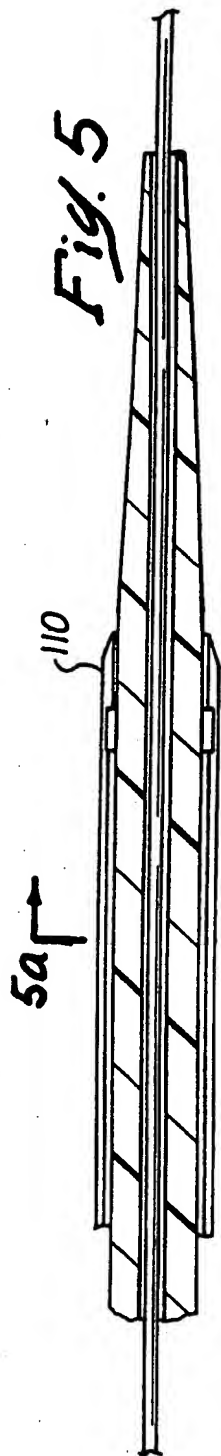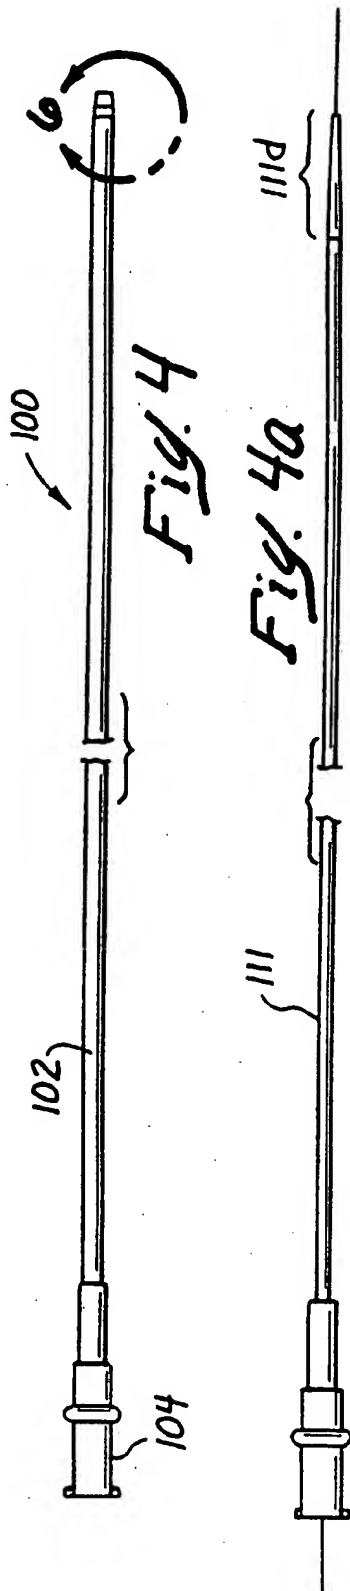



6/32

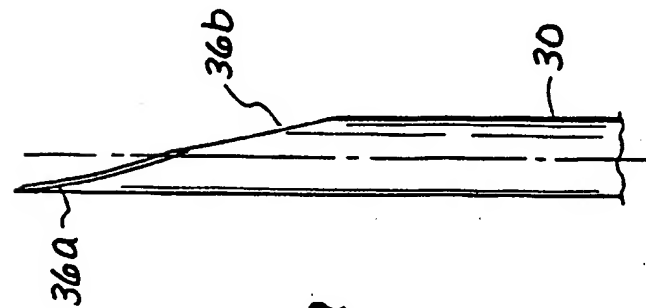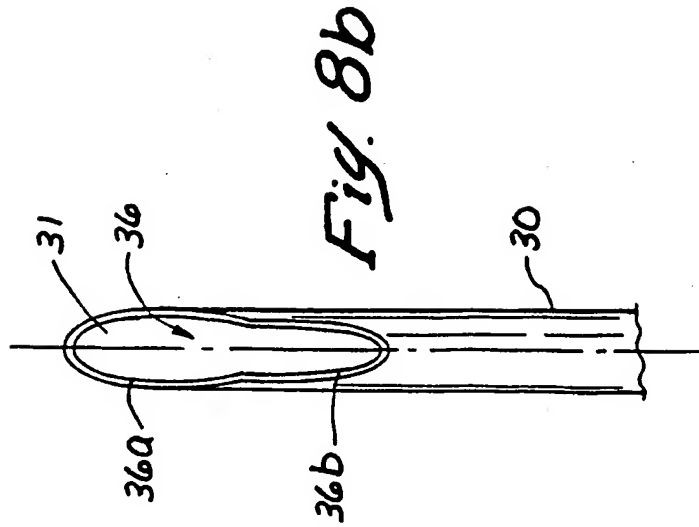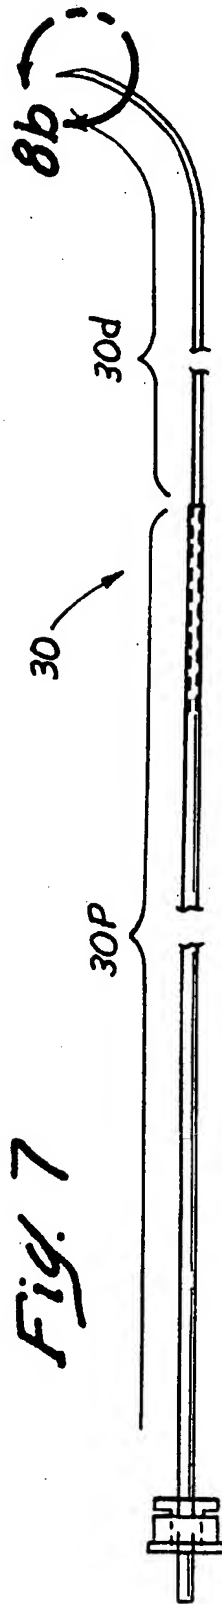


7/32

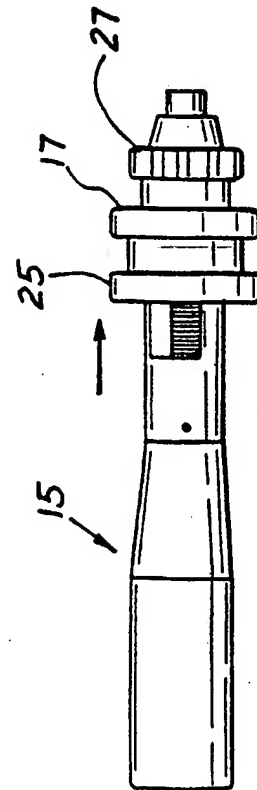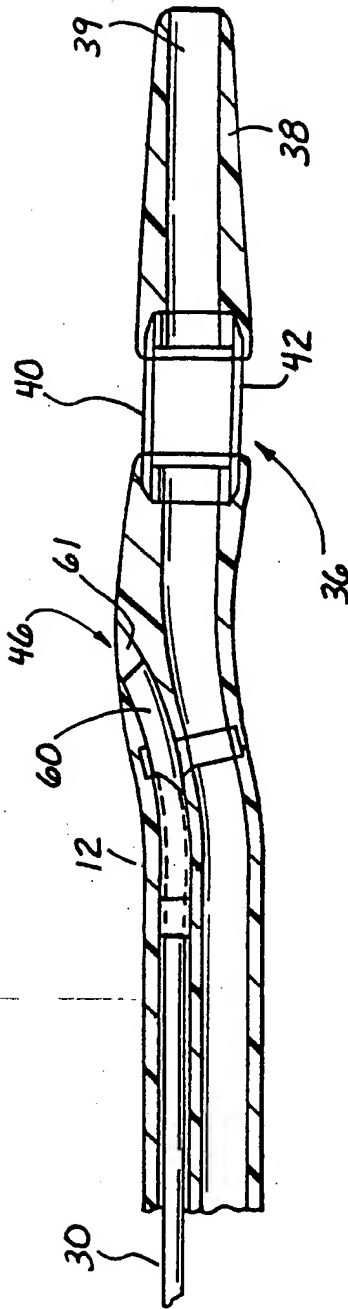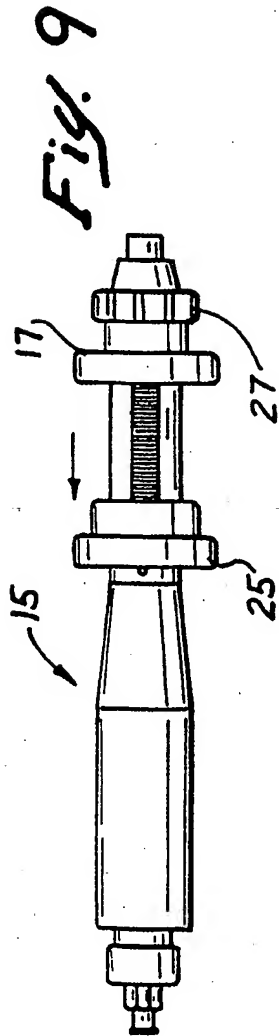

8/32

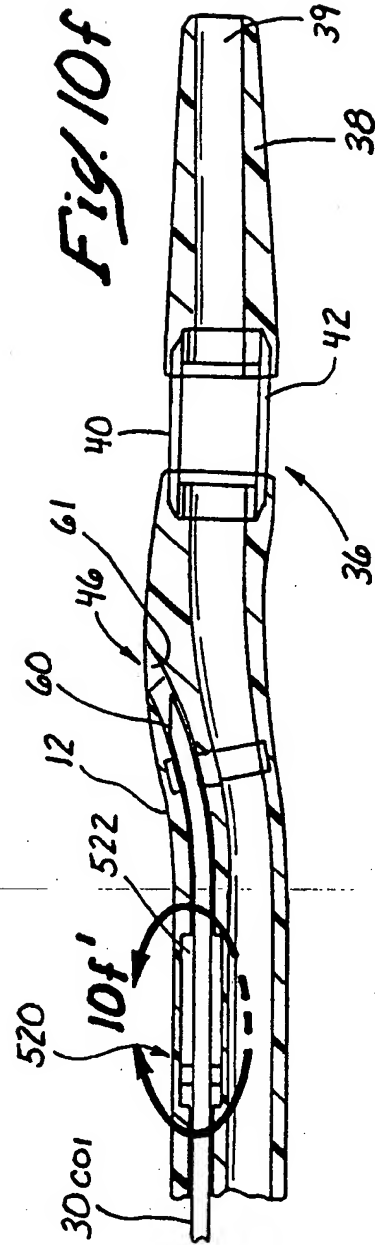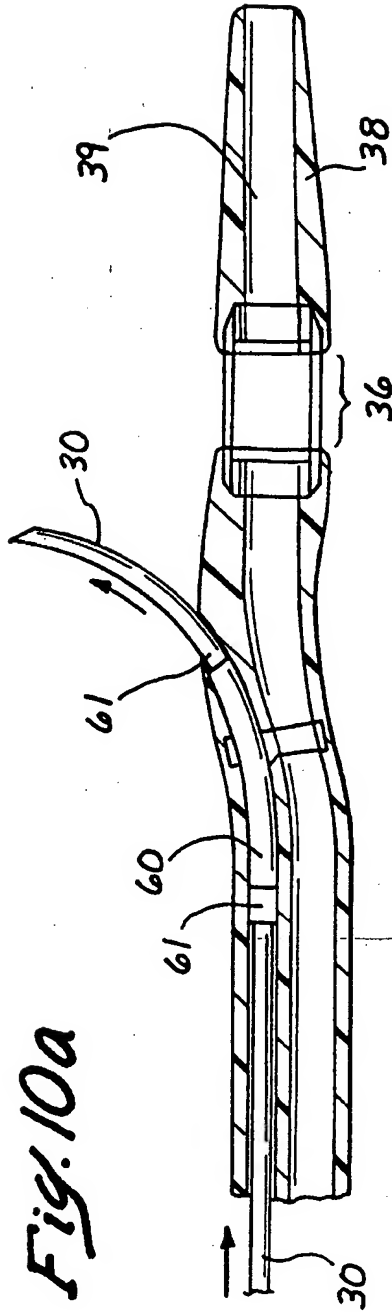




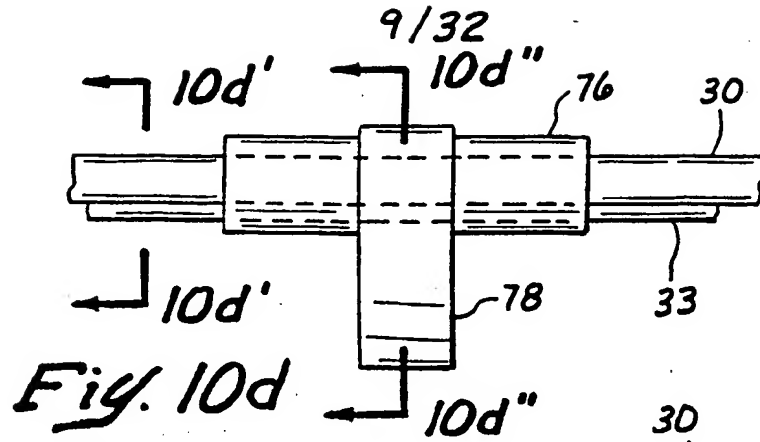


*Fig. 10d*




*Fig. 10d'*

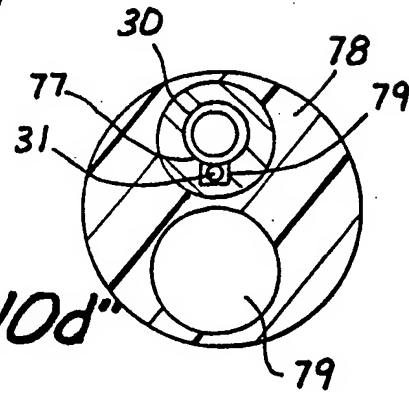


*Fig. 10d''*

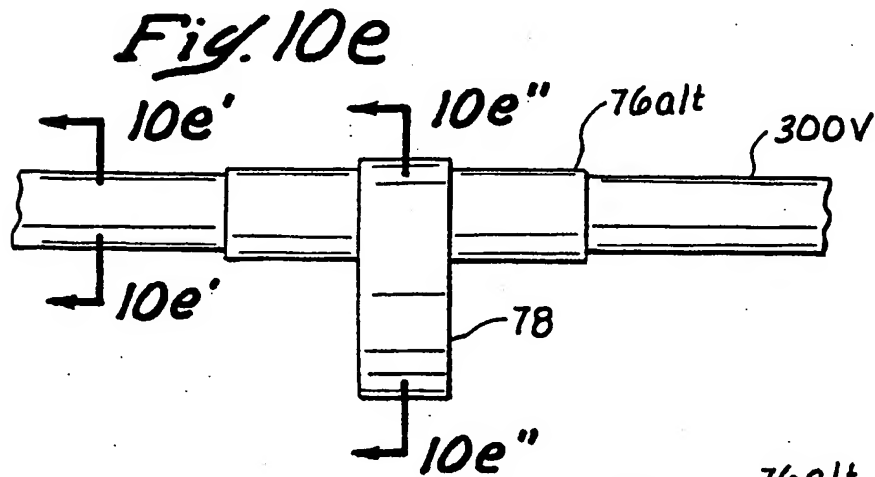

*Fig. 10e*





*Fig. 10e'*

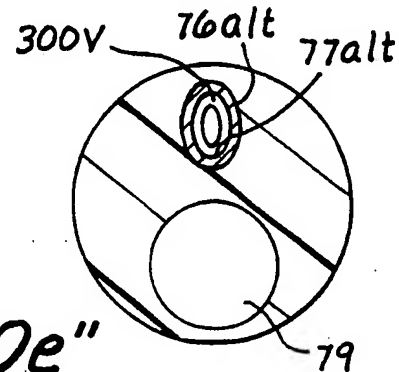



*Fig. 10e''*

10/32

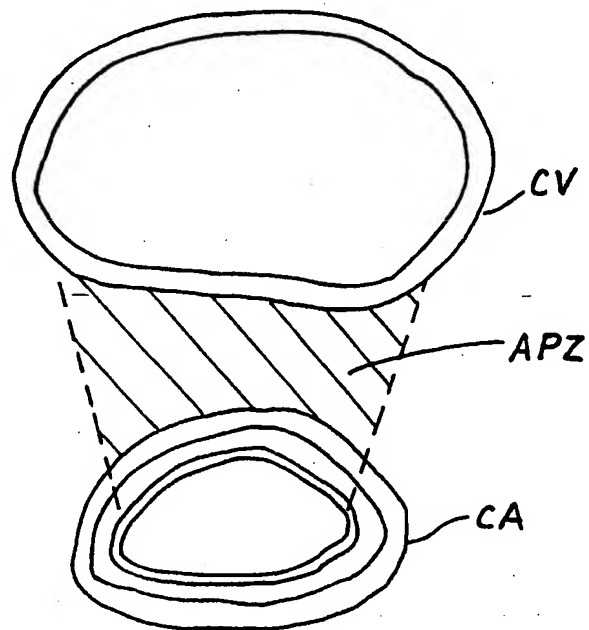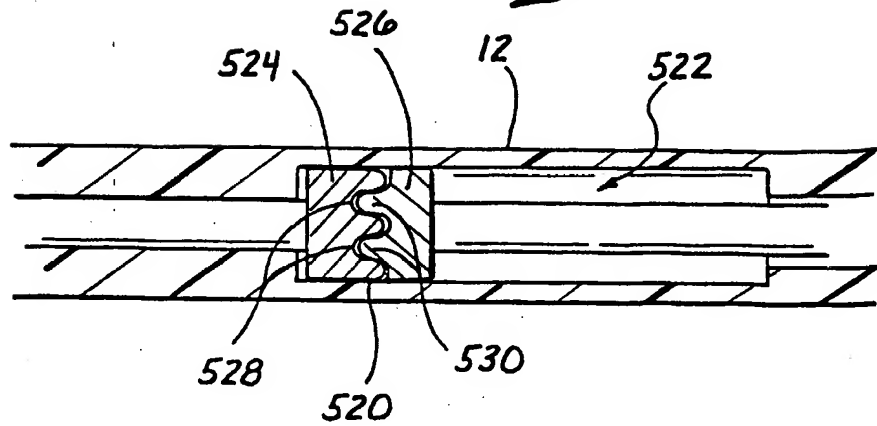*Fig. 10f'**Fig. 12*


11/32

*Fig. 10g*

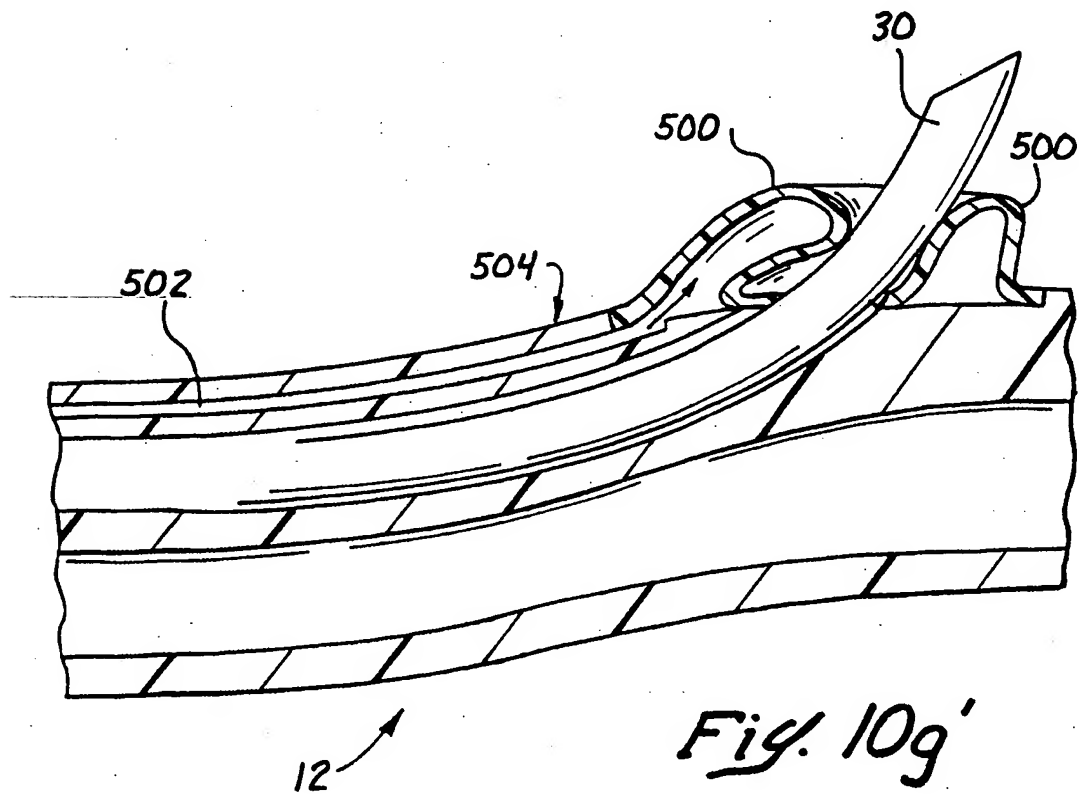
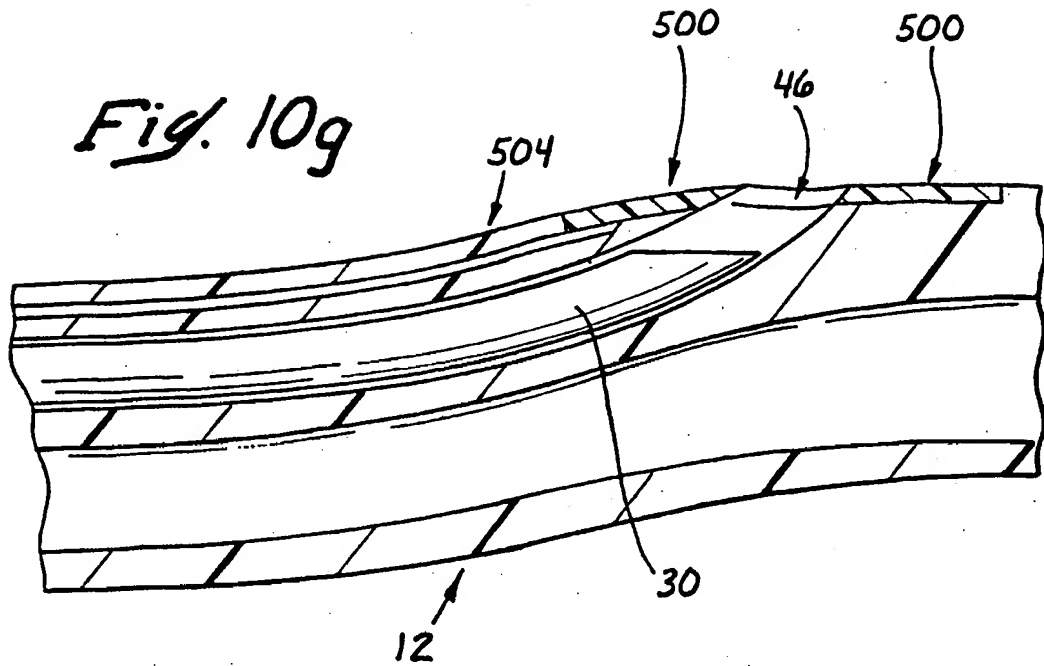


*Fig. 10g'*


12/32


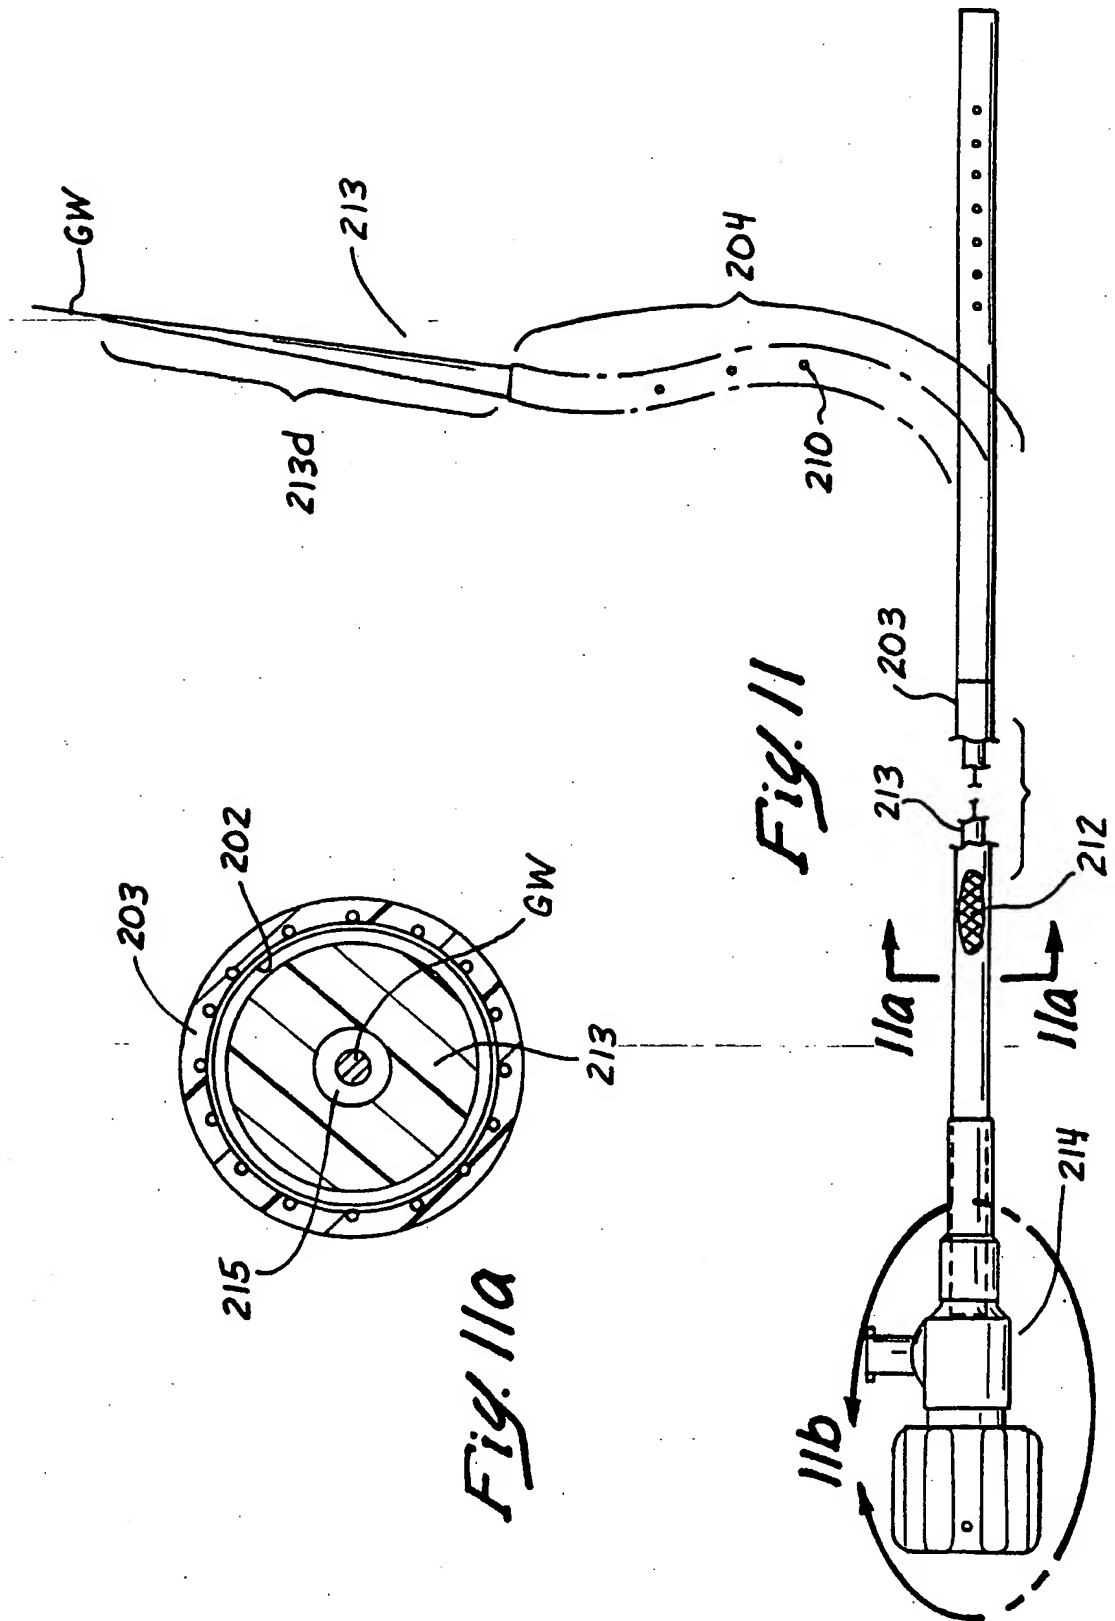


13/32

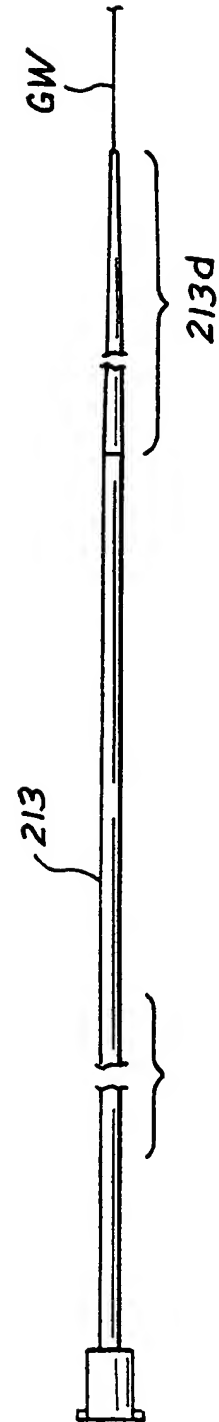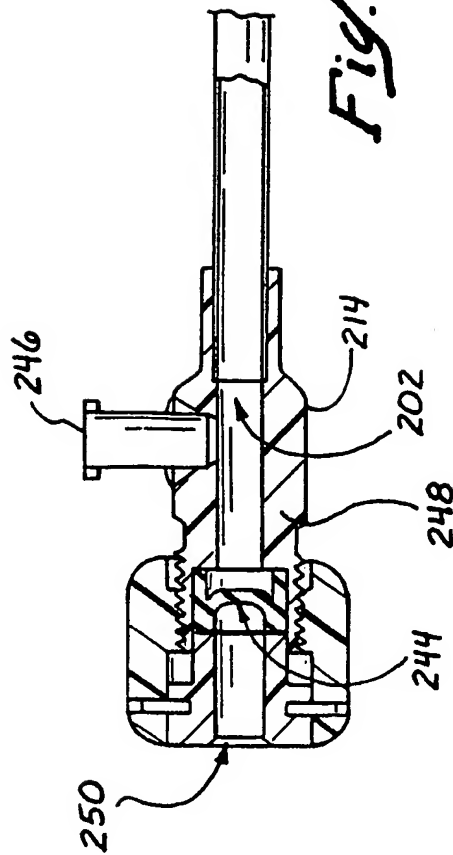


14/32

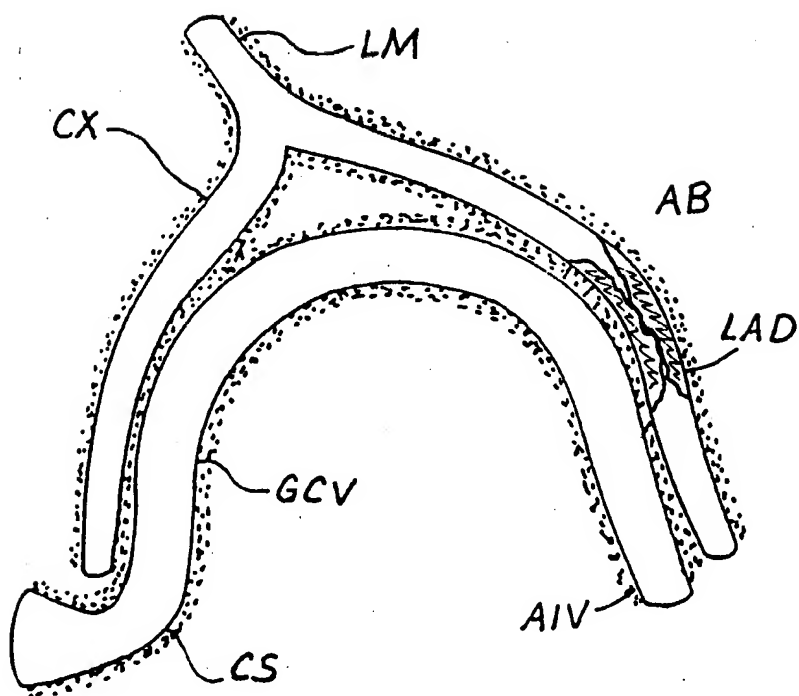*Fig. 13a*

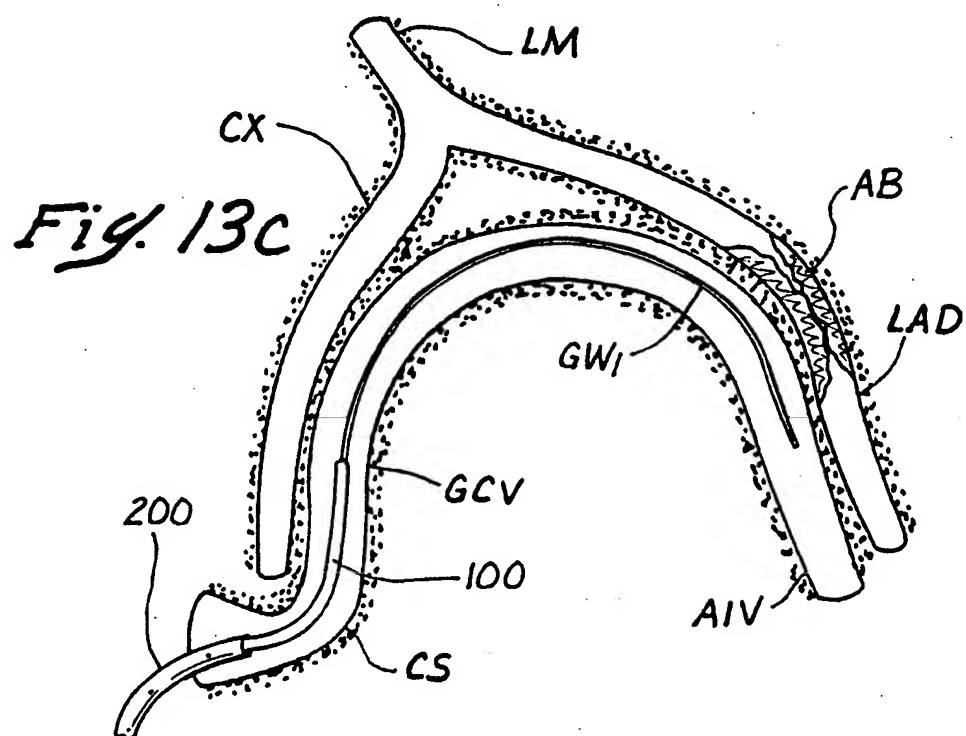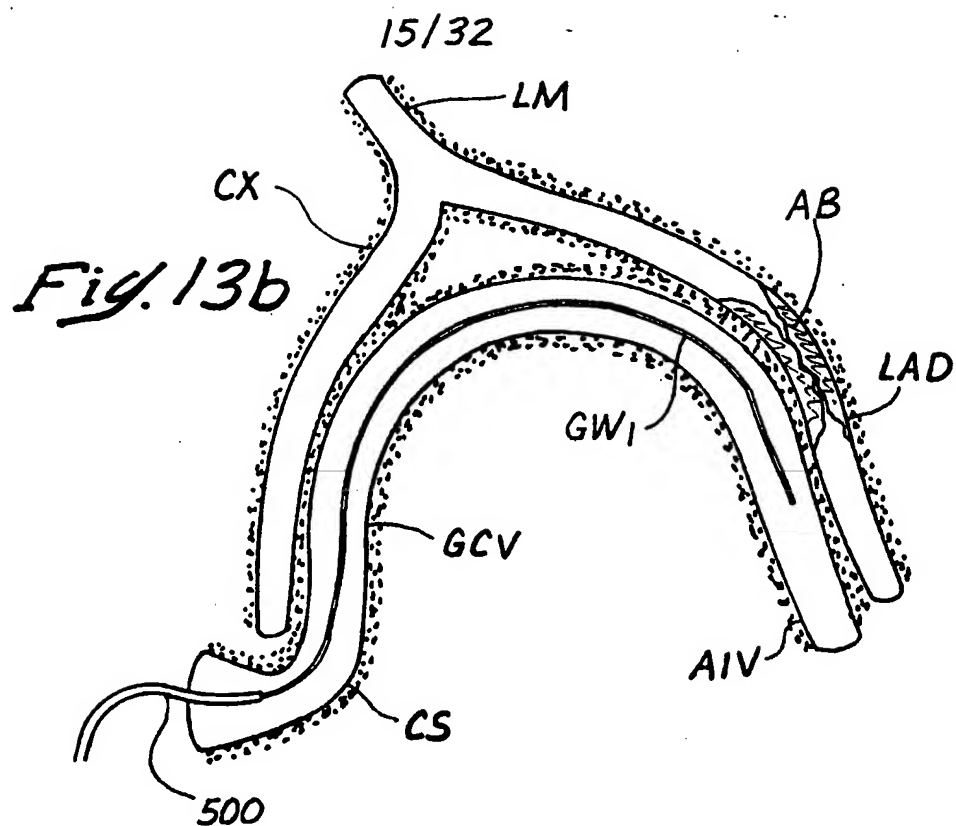


16/32

*Fig. 13d*

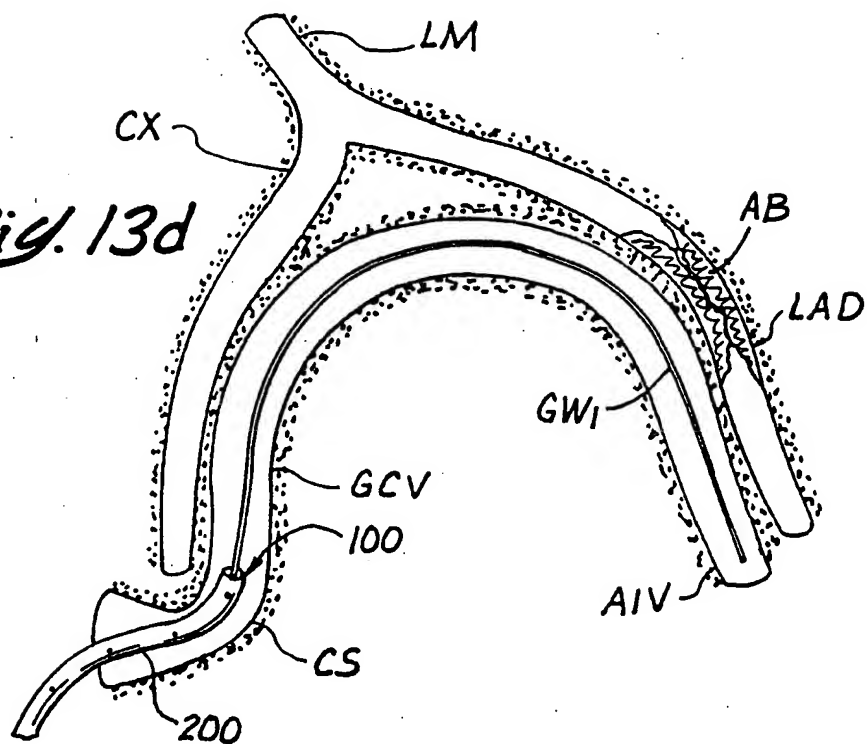


*Fig. 13e*

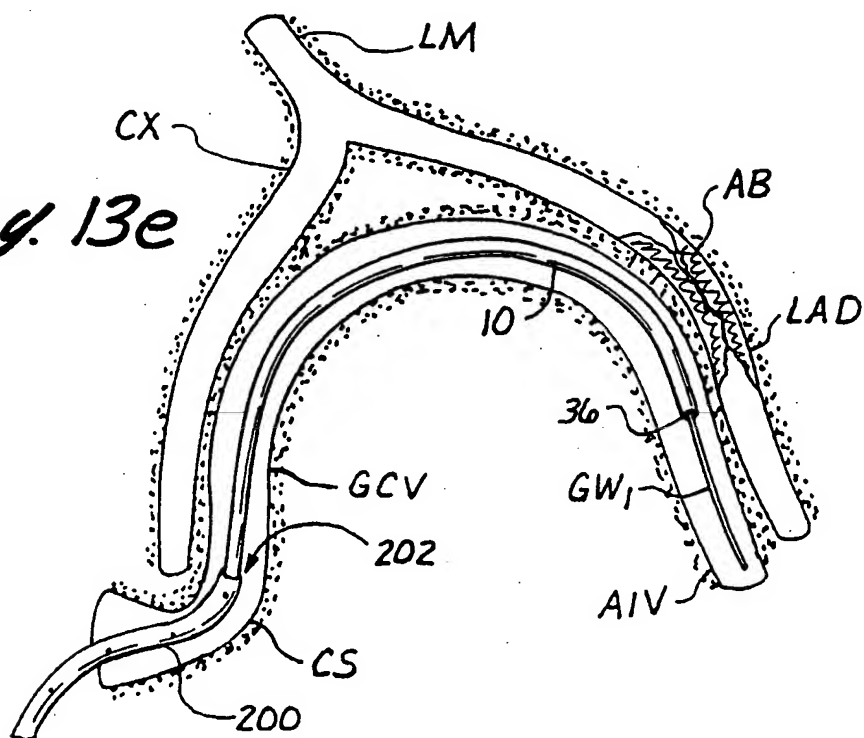




17/32

*Fig. 13f*

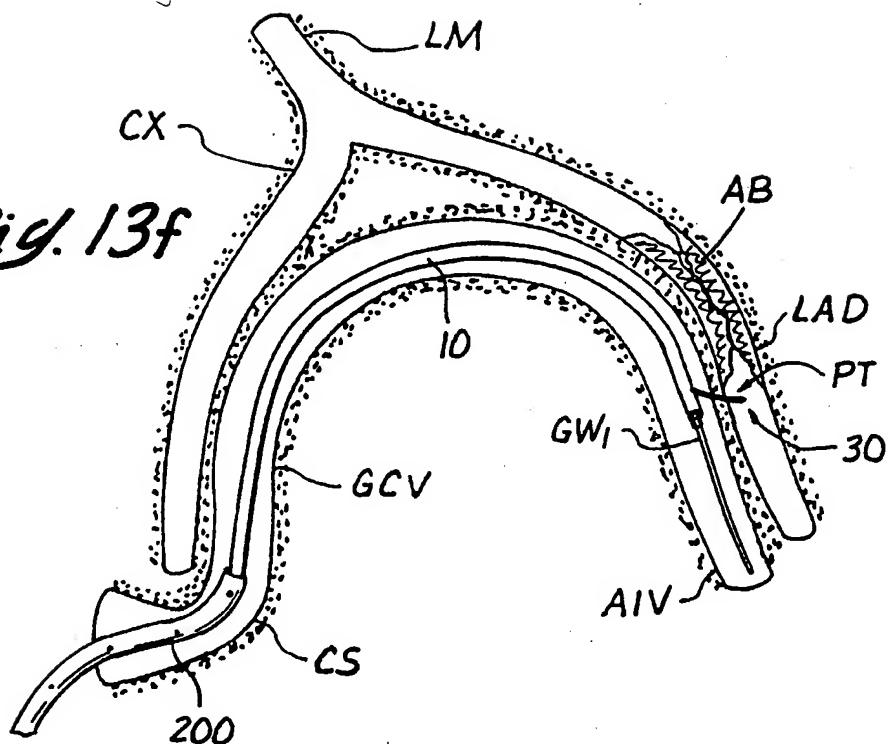


*Fig. 13g*

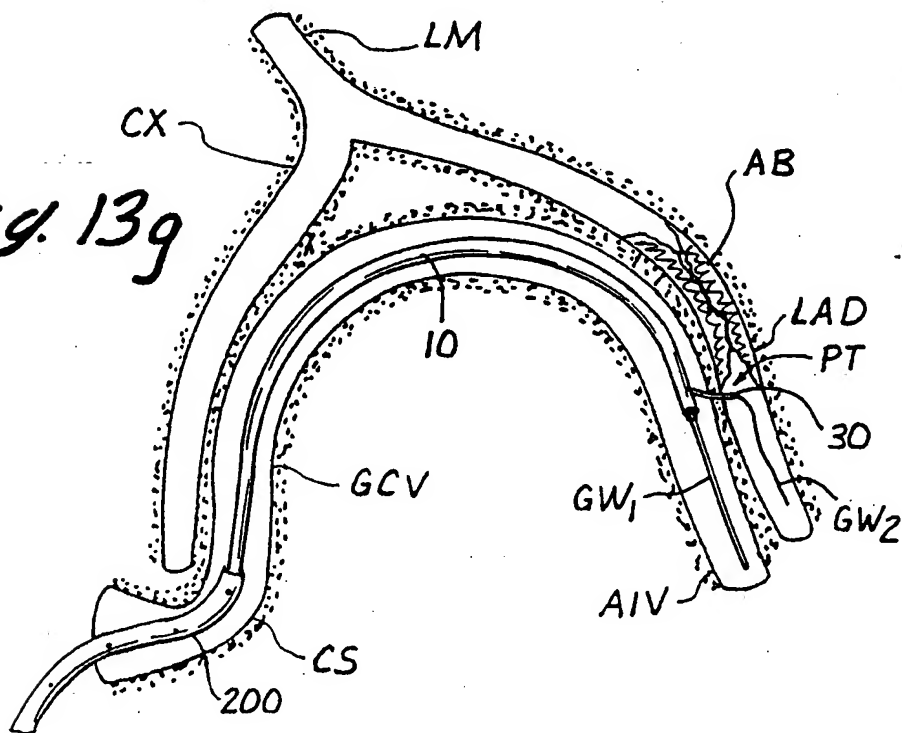


18/32

*Fig. 13h*

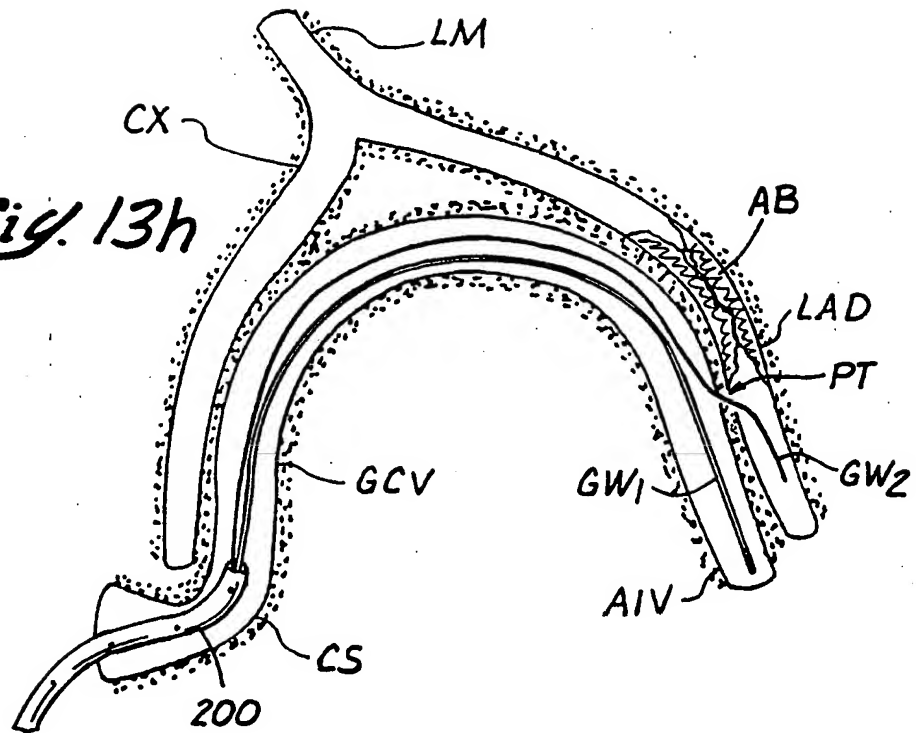


*Fig. 13i*

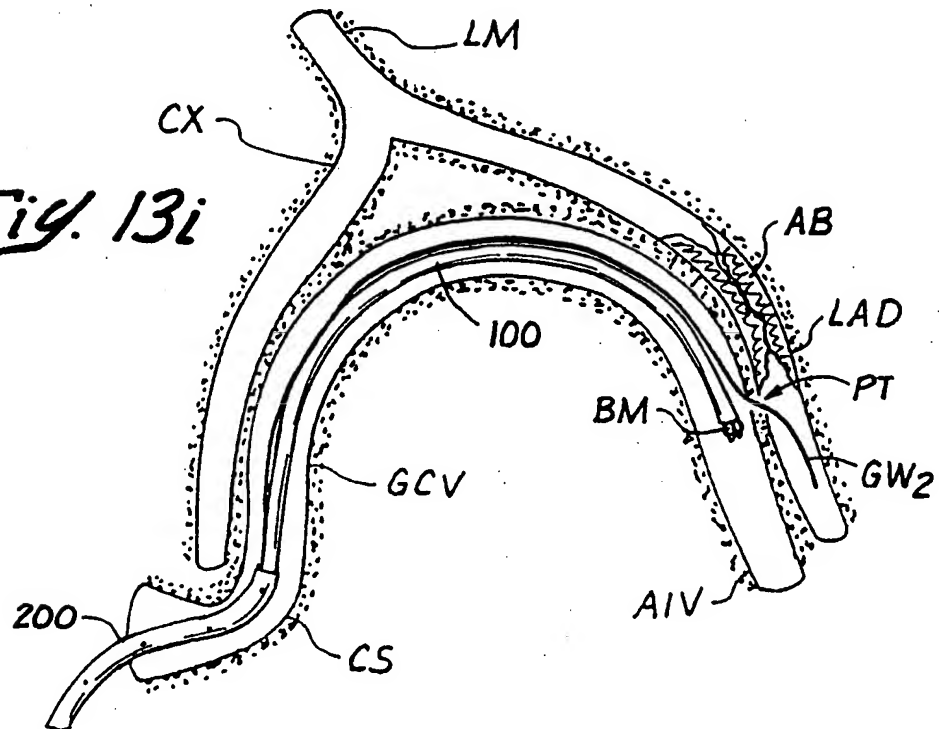


19/32



*Fig. 13j*

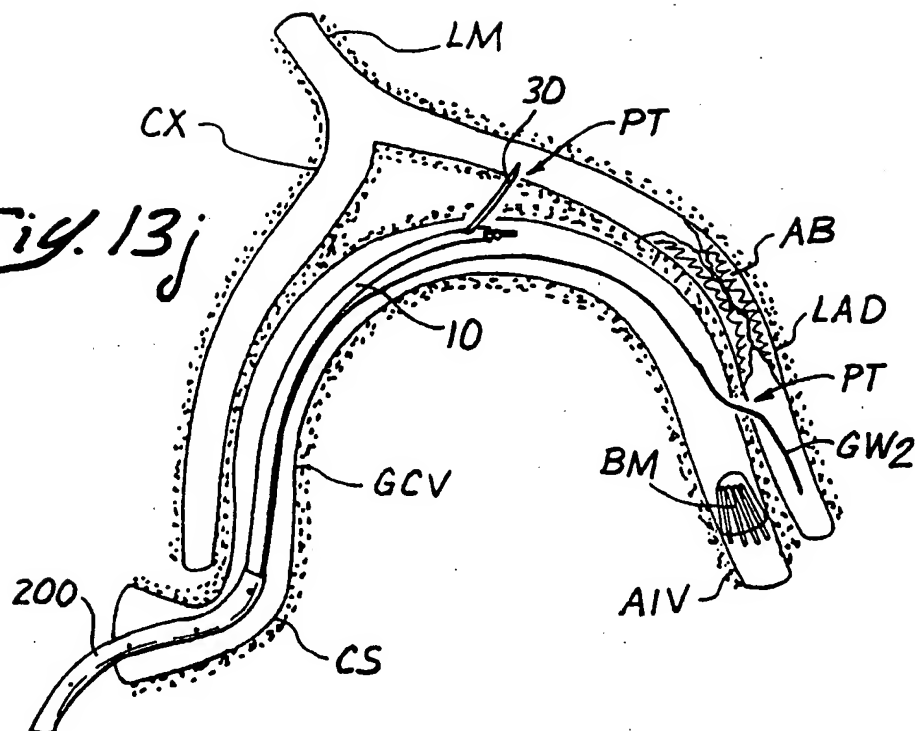

*Fig. 13k*


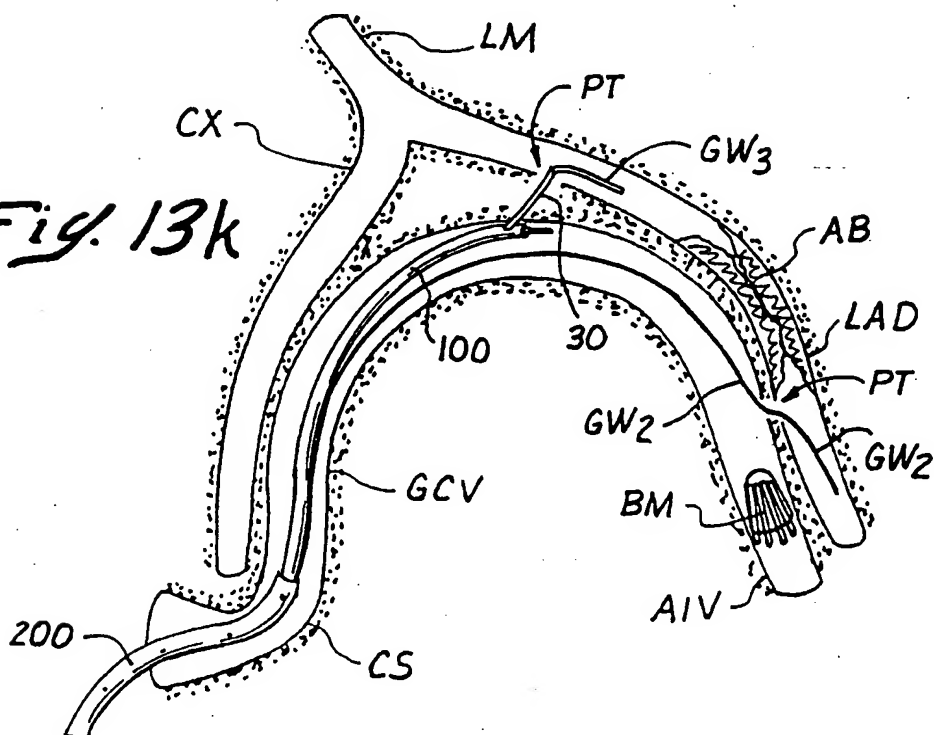


20/32

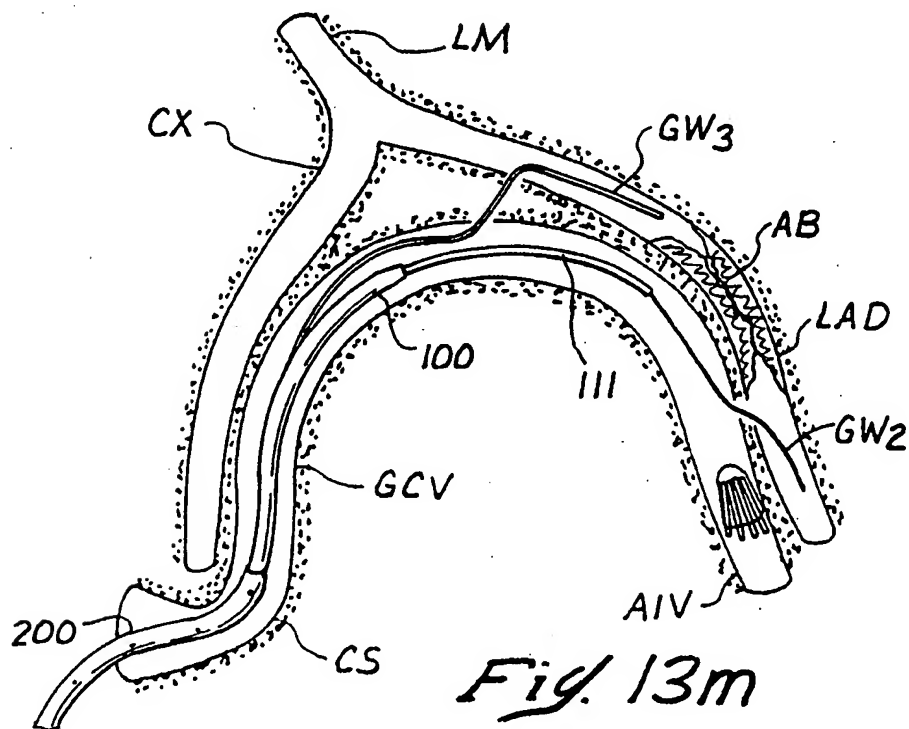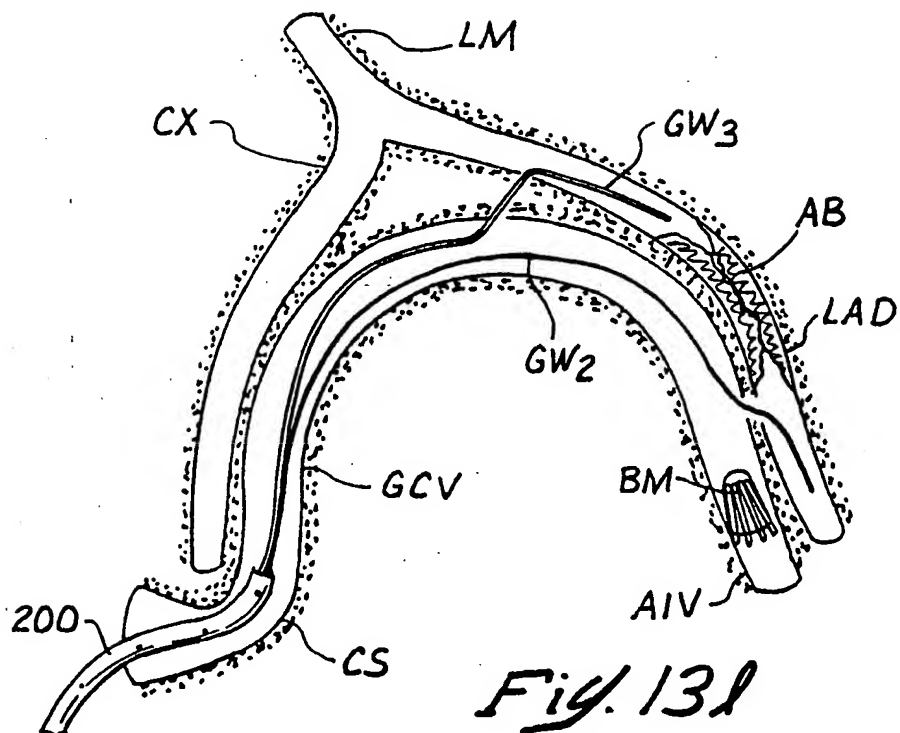


*Fig. 130*

22/32

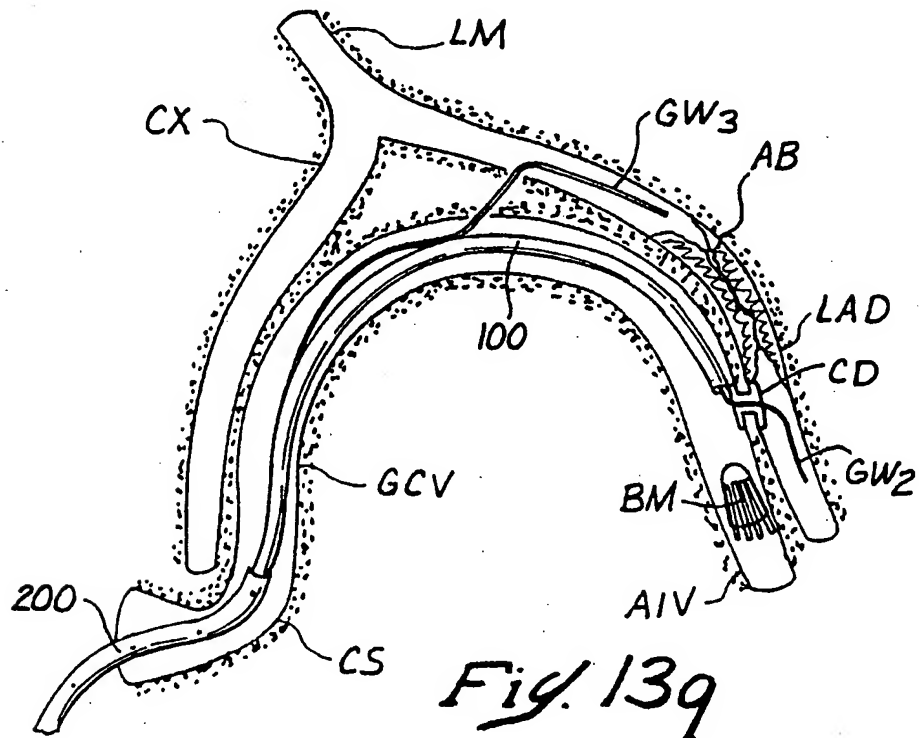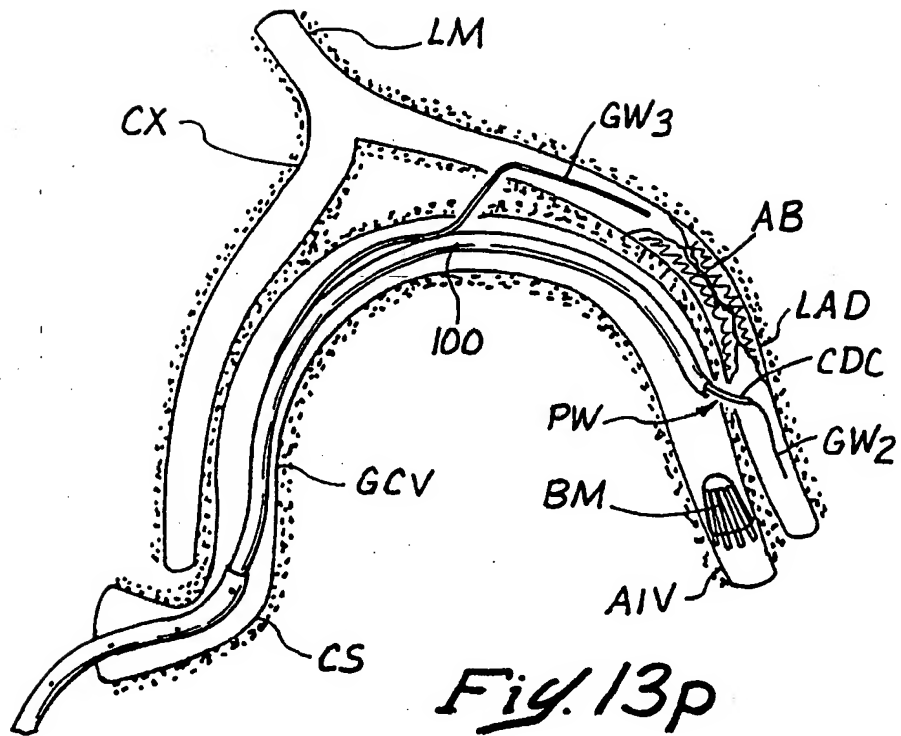


23/32

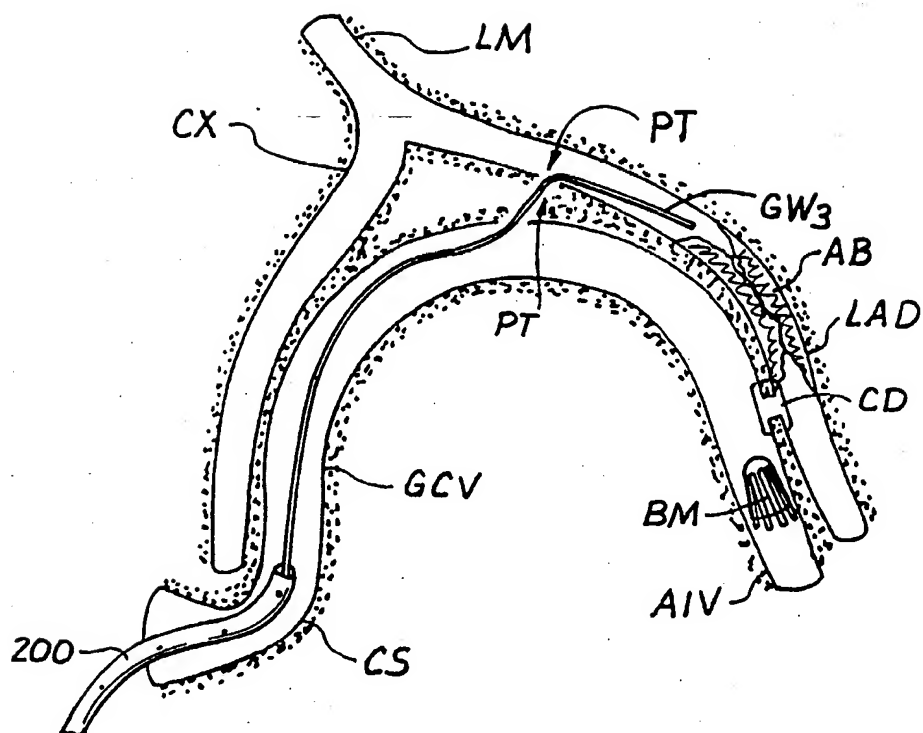
*Fig. 13r*

24/32

*Fig. 13s*

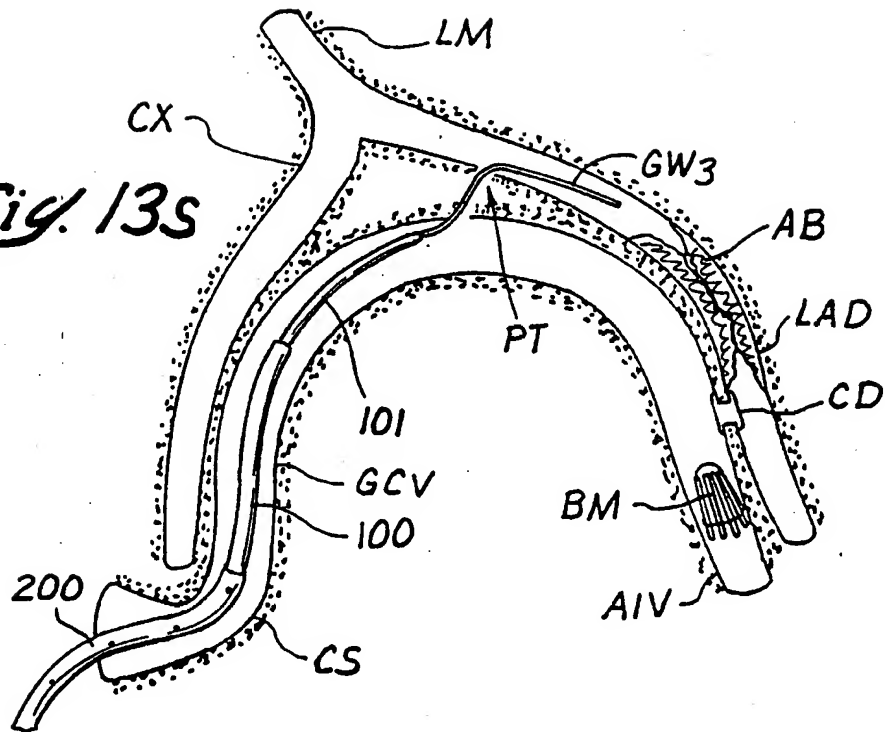

*Fig. 13t*

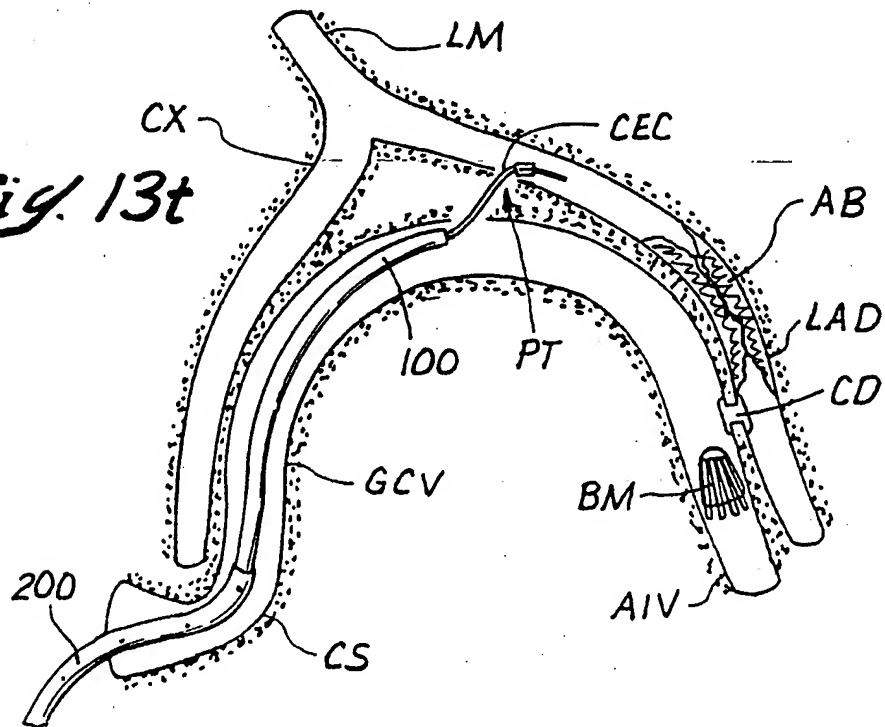







26/32

*Fig. 13w*

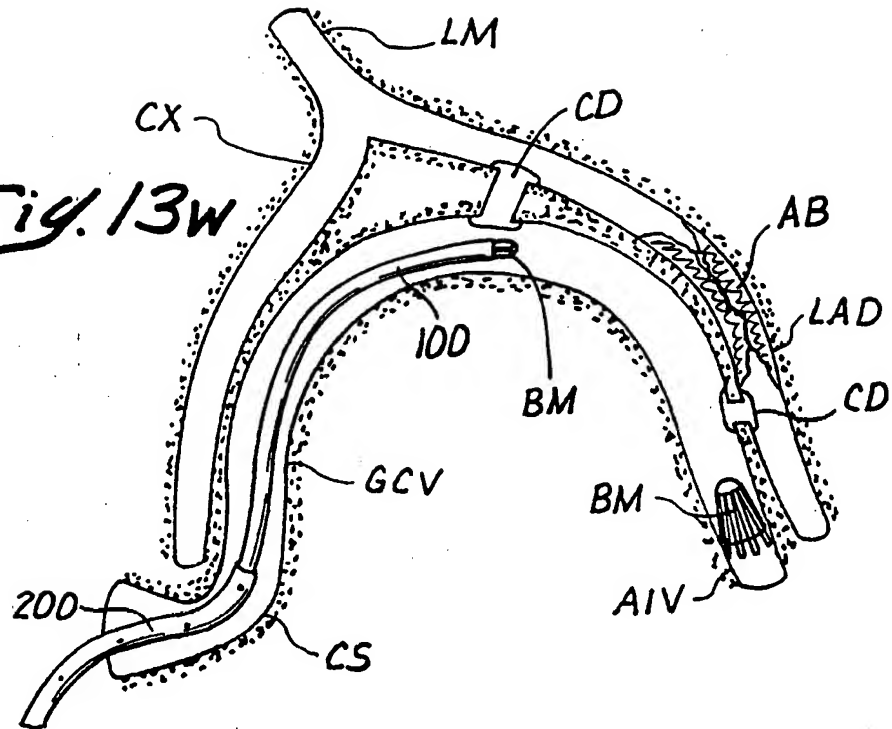


*Fig. 13x*

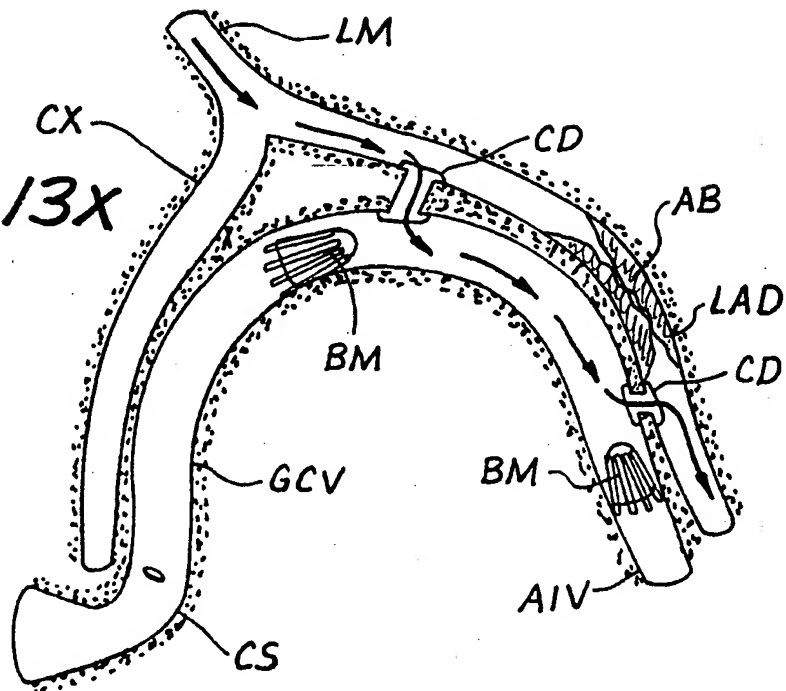




27/32

*Fig. 14a*

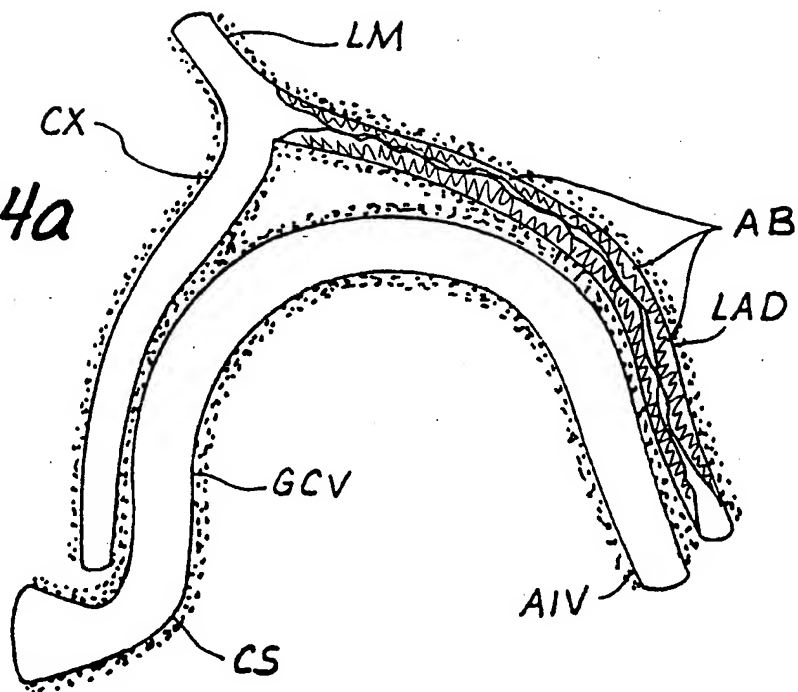


*Fig. 14b*

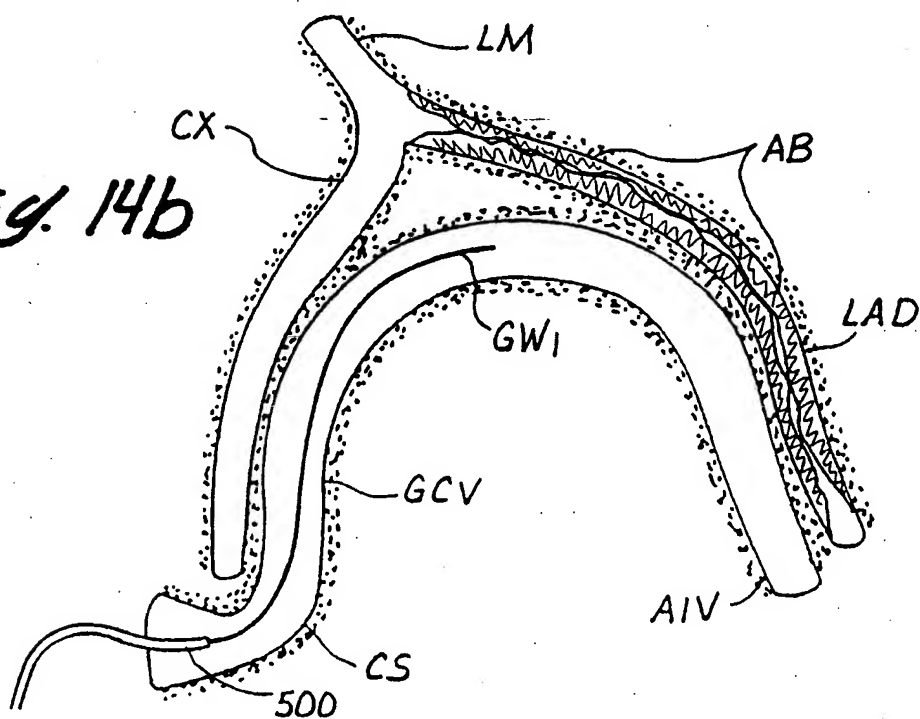

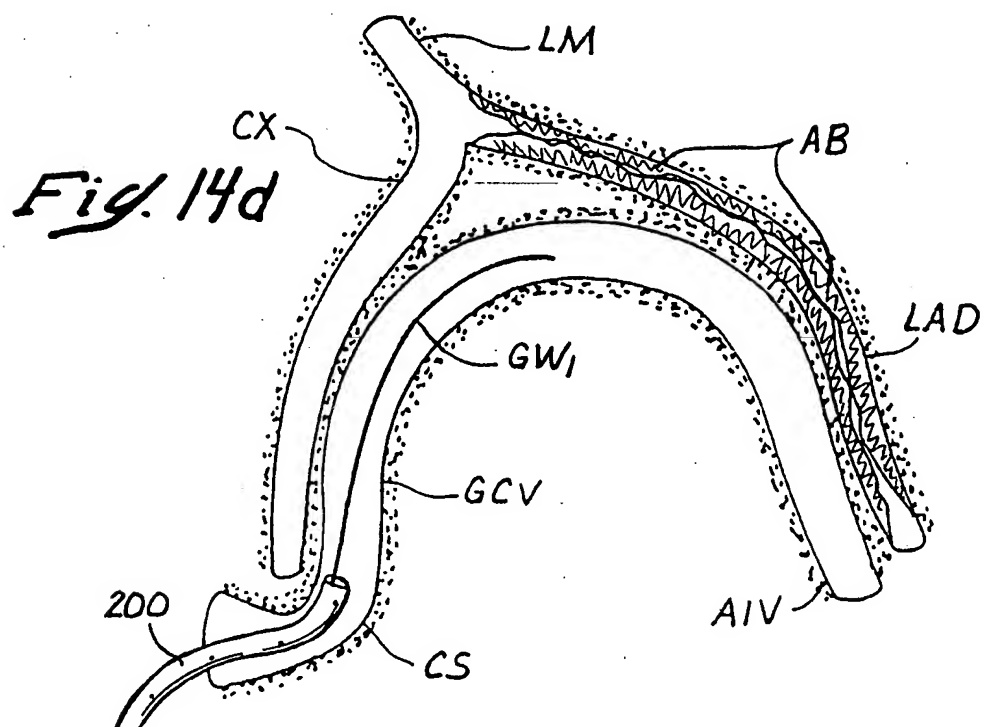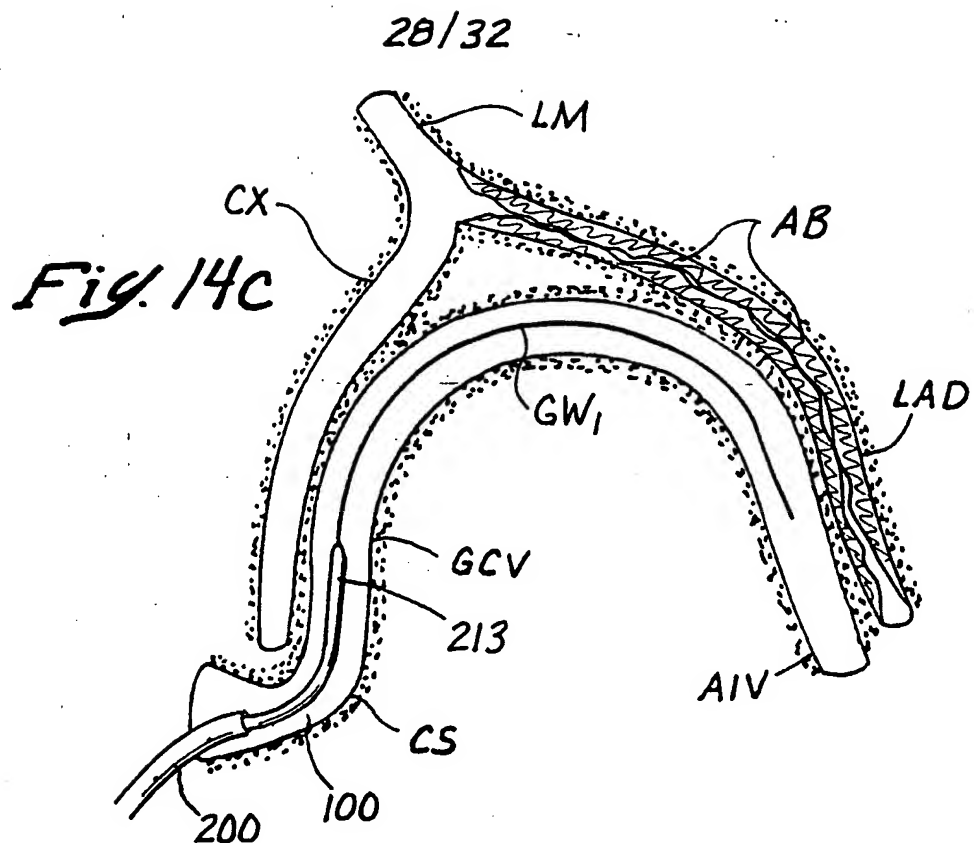




29/32

*Fig. 14e*

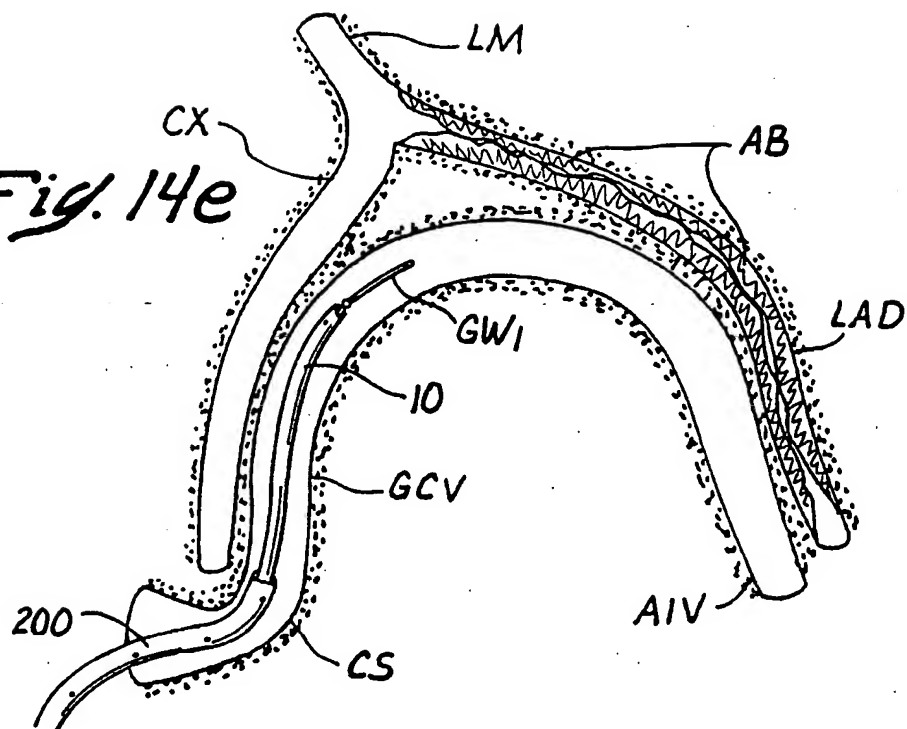


*Fig. 14f*

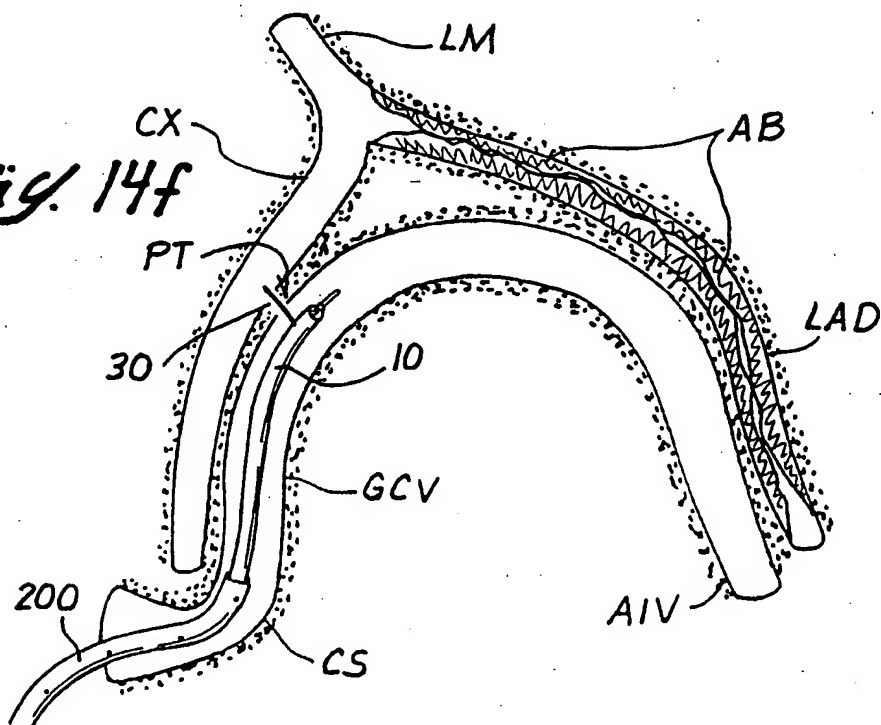

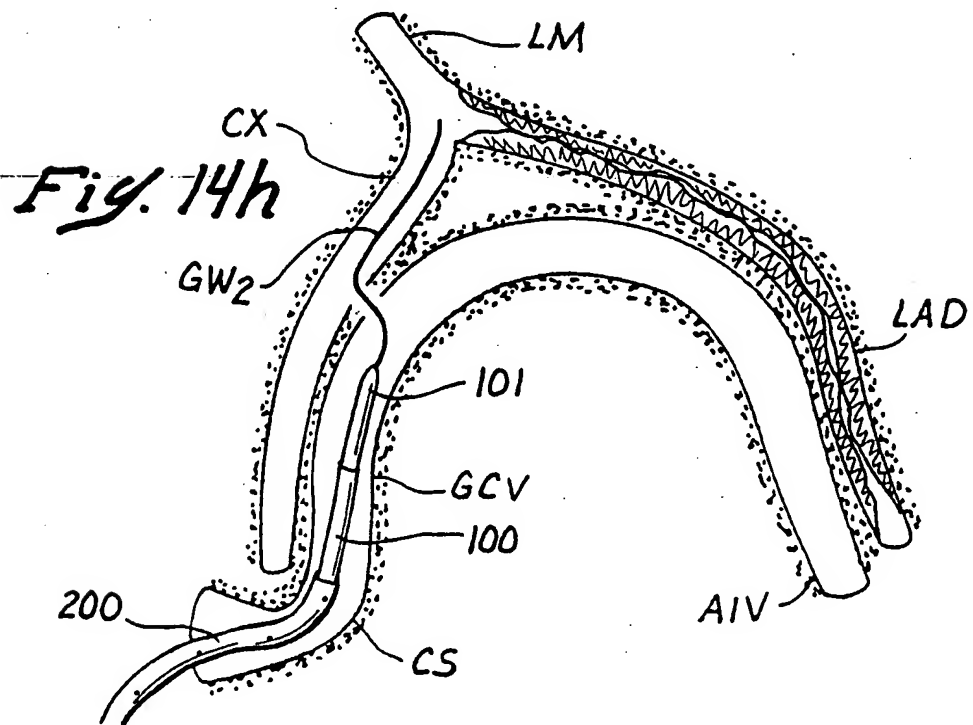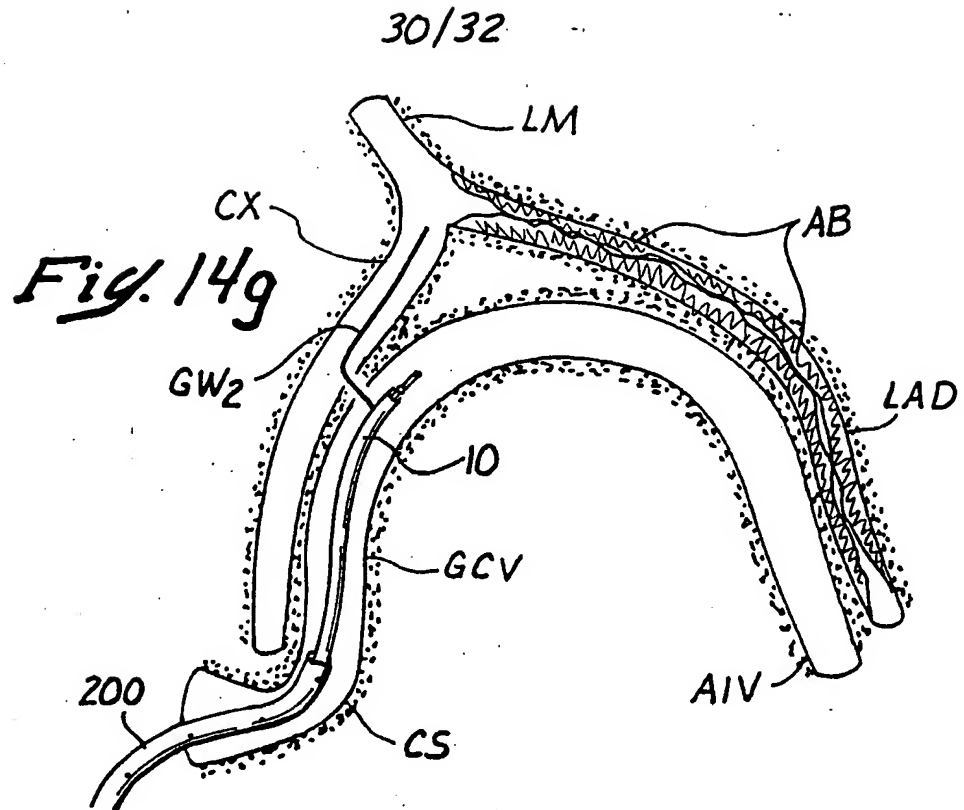


31/32



*Fig. 14i*

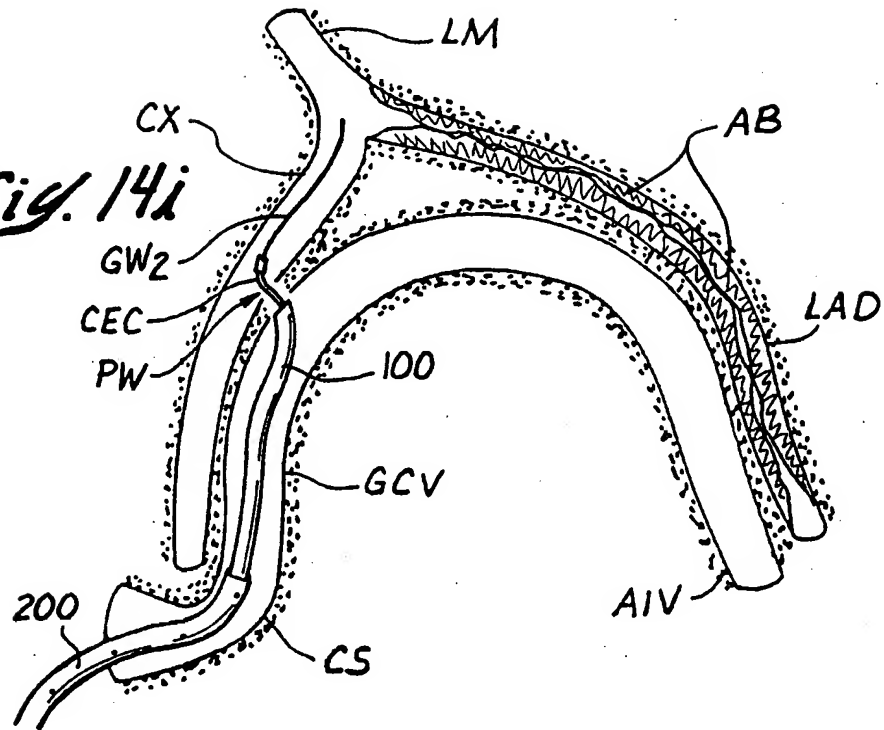

*Fig. 14j*

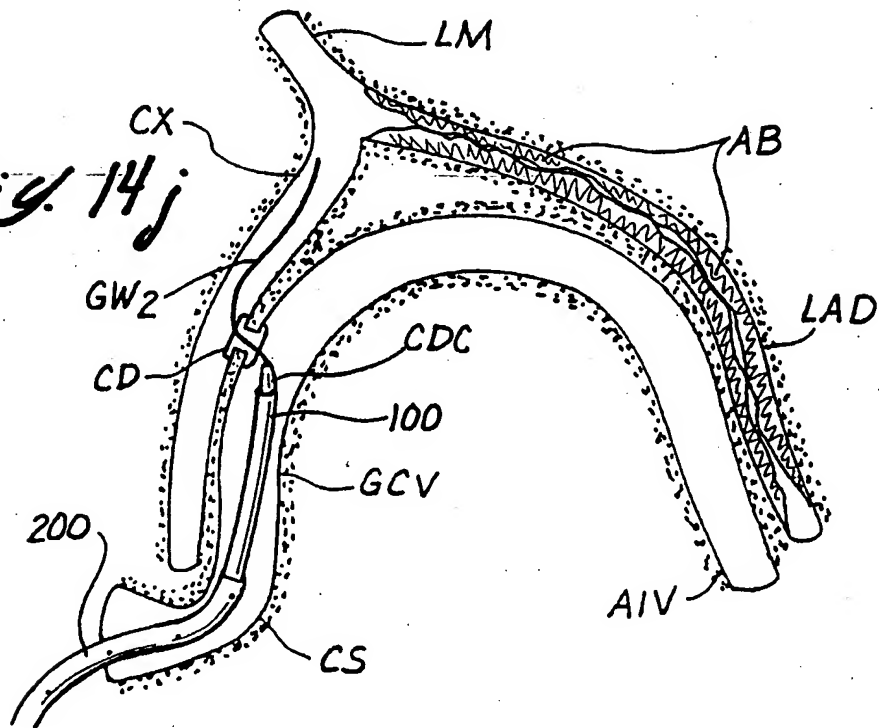

*Fig. 14k*

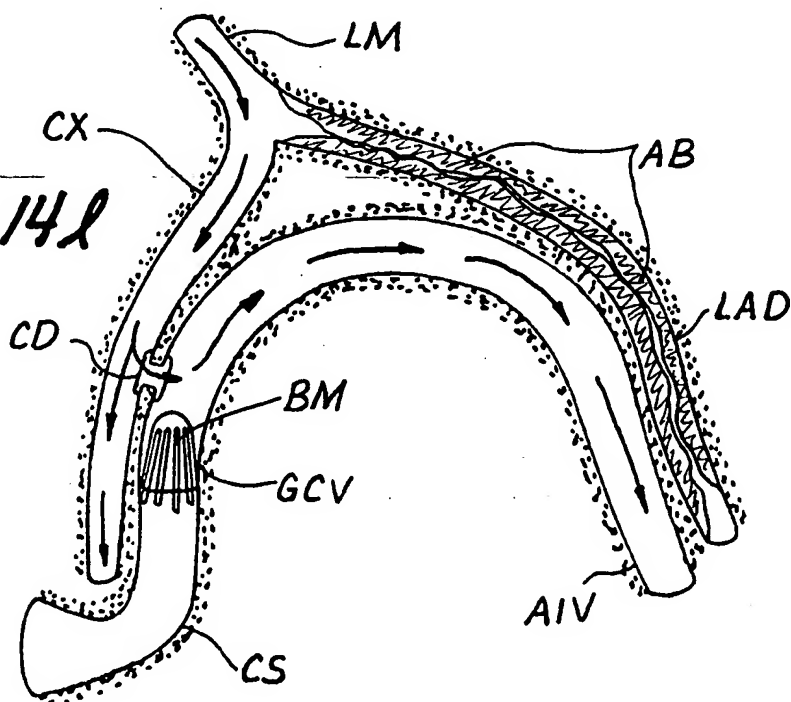



## INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US99/07115

**A. CLASSIFICATION OF SUBJECT MATTER**

IPC(6) :A61B 17/22

US CL :606/159, 170, 180

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 606/159, 170, 180

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5,662,671 A (BARBUT et al.) 02 September 1997, Fig. 1, and col. 9 lines 9-68.	1-41
Y	US 5,681,336 A (CLEMENT et al.) 28 October 1997, Fig. 1, and col. 4 lines 1-68.	42-44
Y	US 5,863,362 A (ROWLAND et al.) 04 November 1997, Fig. 1, and col. 4 lines 30-68.	1-41
X, P	US 5,814,064 A (DANIEL et al.) 29 September 1998, Fig. 1, and col. 3-5.	1

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"&" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

18 MAY 1999

Date of mailing of the international search report

07 JUN 1999

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703) 308-2708

Authorized officer

(JACKIE) TAN-UYEN THI HO

Telephone No. (703) 306-3421

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**